

## SN02R08-552-MC2029 (Order no. 091083)

### Series SN... 8 mm, mechanical







- ▶ Plunger spacing 8 mm
- ▶ Upright housing, without flange
- ▶ Degree of protection IP67 according to IEC 60529



### Switching elements

ES 552 Snap-action switching contact 1 changeover contact standard switching element

### Dimensional drawings

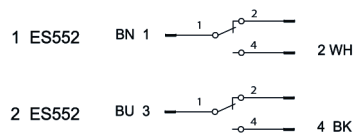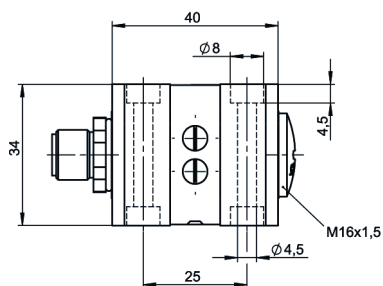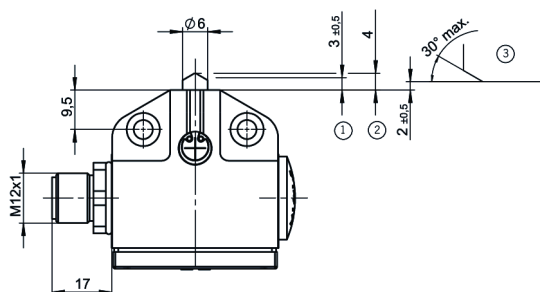

1 Operating point

2 Max. free position

3 Dog

4 Plug coding not adjustable. Only suitable for straight plug connectors. Screwed in with 075743.

Housing without earth conductor! All the electrical connections must either be isolated from the mains supply by a safety transformer according to EN IEC 61558-2-6 with limited output voltage in the event of a fault, or by other equivalent insulation measures.

6 Switching element: ES552 with snap-action contact element, 1 changeover contact

Connection examples

# ES 552

