

ESM-BL203 (Order no. 085609)

Base unit ESM-BL., 2 safety contacts, Cat. 3

- ▶ Use up to category 3 according to EN ISO 13849-1
- ▶ LED status indicators
- ▶ 1-channel or 2-channel control
- ▶ 2 redundant safety contacts



Relay outputs


The outputs are electrically decoupled and of redundant design.

Connection options

By using suitable wiring, the following functions can be selected:

- ▶ Relay start with automatic start or a start button
- ▶ Monitoring of downstream relays or contactors.

Dimensional drawings

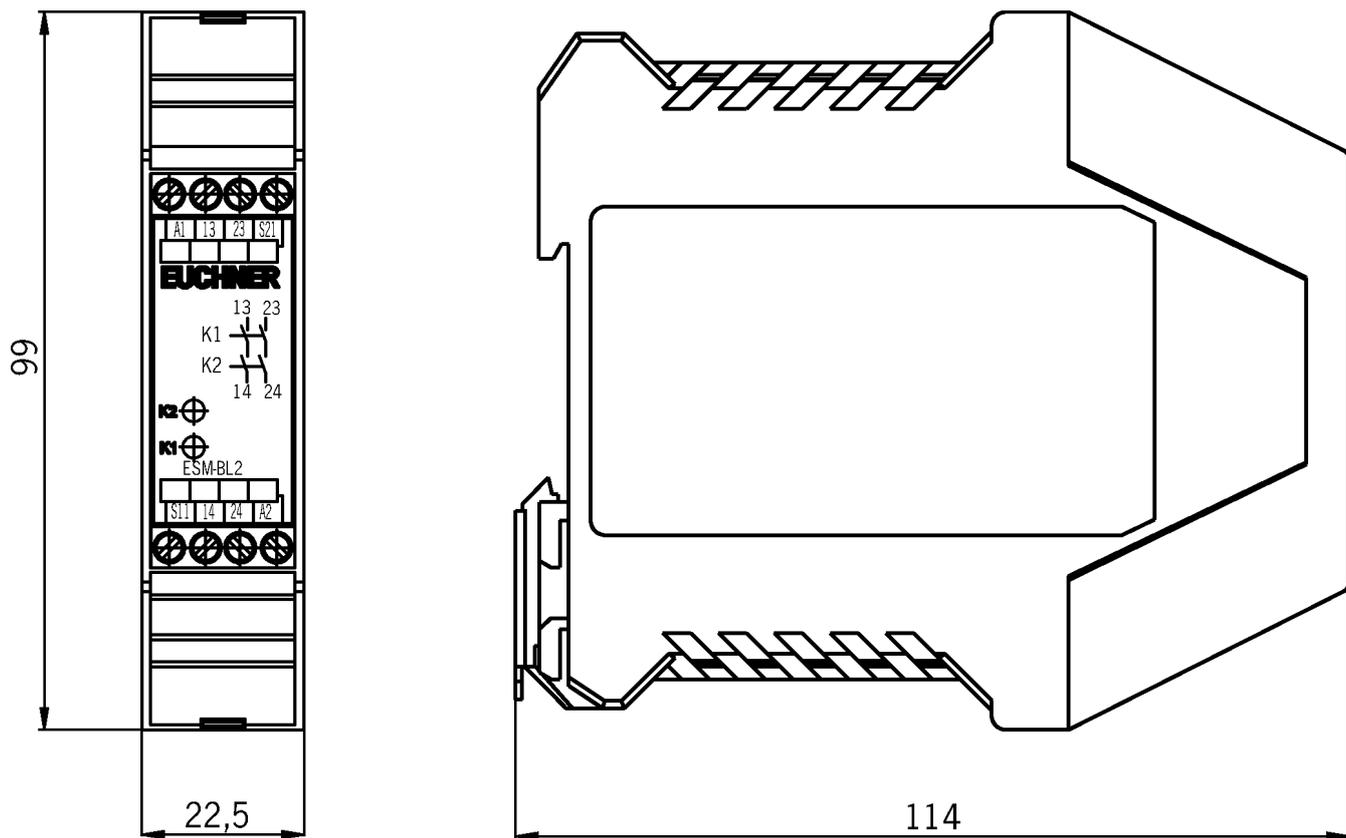

Connection examples

