


NZ2WO-511SVM5L060GE (Order no. 098652)

Safety switch NZ.WO, rounded plunger, plug connector M12

- ▶ Rounded plunger
- ▶ Version B according to EN 50041 (hardened)
- ▶ Plug connector M12, 5-pin
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts
- ▶ LED indicator: AC/DC 12–60 V yellow



Approach direction



Horizontal and vertical
Can be adjusted in 90° steps





LED indicator

The switch has one freely assignable LED indicator.

Switching element

511 Snap-action switching contact, 1 positively driven contact $\ominus \rightarrow$ + 1 NO contact

Dimensional drawings

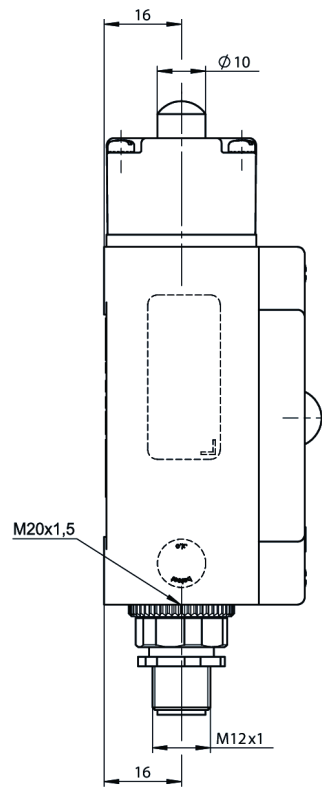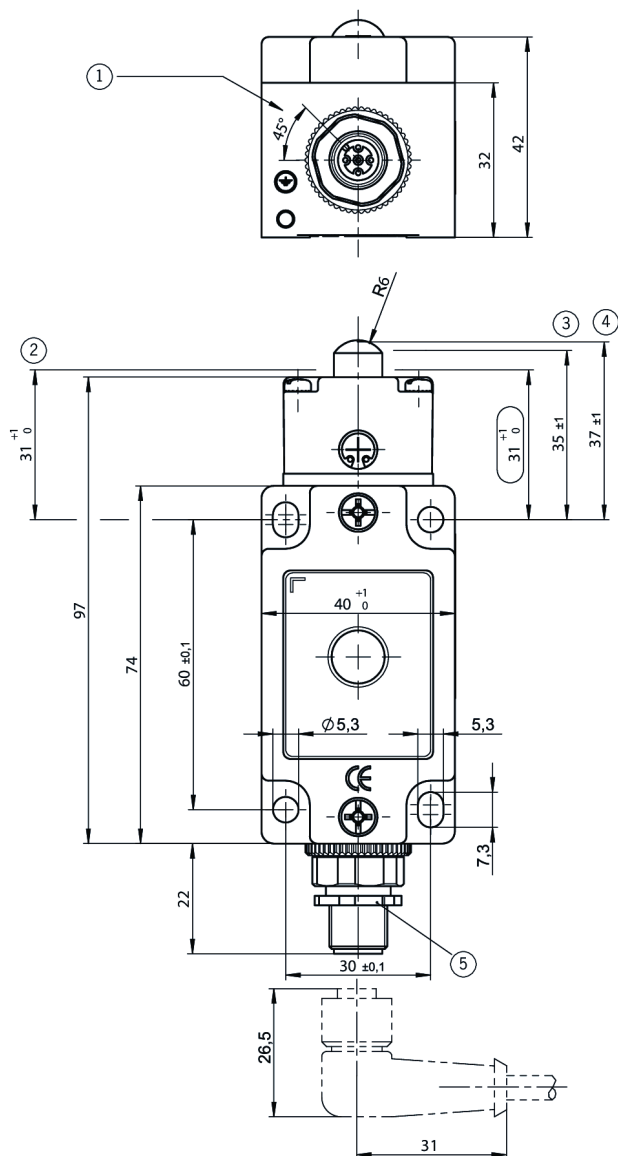

- 1 Guide lug aligned
- 2 End position
- 3 Operating point
- 4 Free position
- 5 Male socket adjustable (max. 270°)

6 Positive opening function is dependent on maintaining this distance. Actuator (dog) must be positively mounted on the machine. Switch can be replaced only with the same type.

7 Switching element ES511 snap-action contact element 1 NO contact + 1 NC contact, NC contact positive opening

Connection examples

