


## CMS-M-CA (Order no. 084577)

### Actuator CMS design C

► Cylindrical version M25



### Dimensional drawings

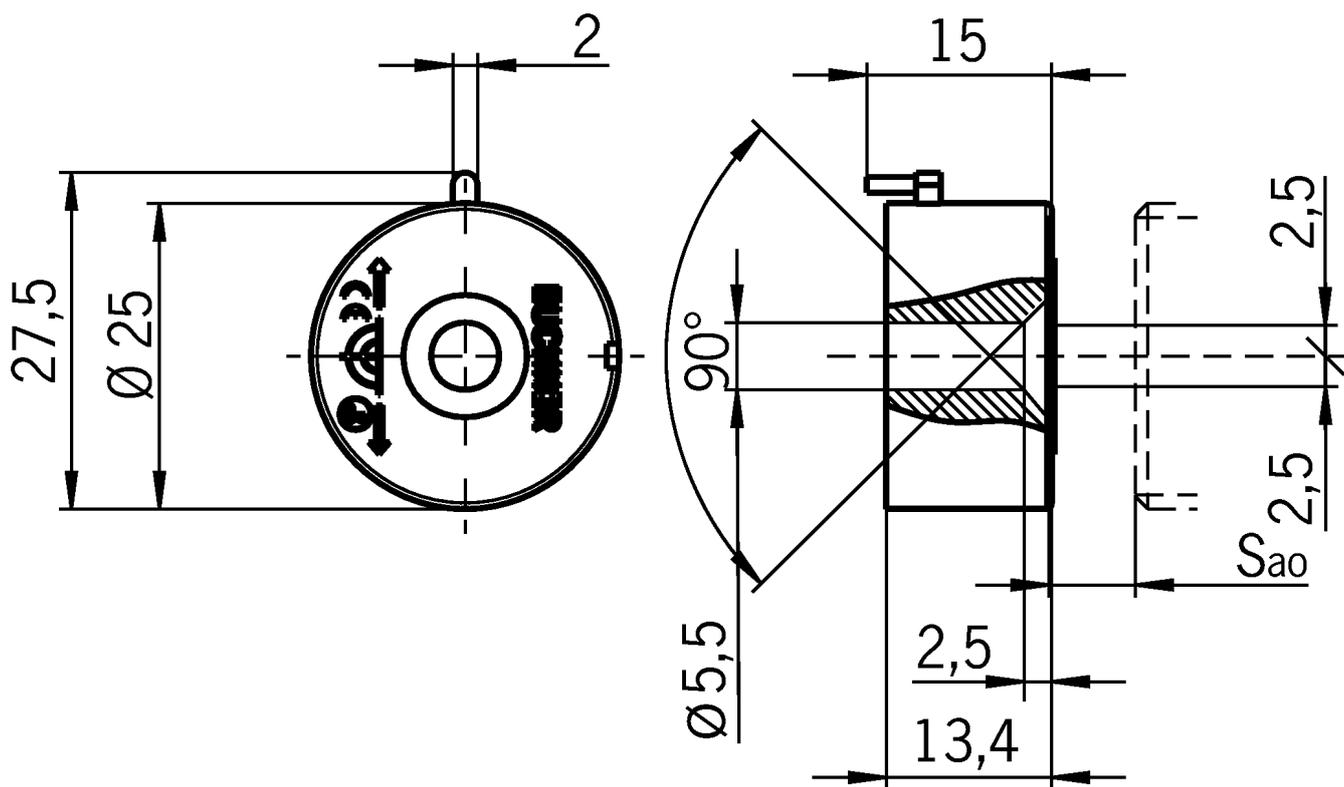

## Technical data

### Approvals



### Mechanical values and environment

Tightening torque	0.4 ... 0.5 Nm
Design	C
Storage temperature	-25 ... 70 °C
Degree of protection	IP67
Ambient temperature	-20 ... 60 °C
Material	
	Housing PPS
Method of operation	Magnetic

### Miscellaneous

in compliance with	EN ISO 13849-1:2015; EN 50178:1997; EN 60204-1:2006/A1:2009; EN ISO 14119:2013; EN 61000-6-2:2005; EN 61000-6-3:2007/A1:2011; EN 60947-5-3:2013
--------------------	---

## Downloads

All documentation for this material can be found on our website:

<https://www.euchner.de/en-us/a/084577/?#downloads-tab>