

NM02AL–MC2069 (Order no. 095364)

Safety switch NM.AV / NM.AL, hinged actuator as solid shaft, short housing, cable entry M16 x 1.5

- ▶ Hinged actuator as solid shaft, shaft length 110 mm
- ▶ short housing
- ▶ Cable entry M16 x 1.5
- ▶ 2 pos. driven contact




Head alignment

Actuating head can be adjusted in 90° steps.

Switching element

ES02 Slow-action switching contact 2 positively driven contacts ➞

Dimensional drawings

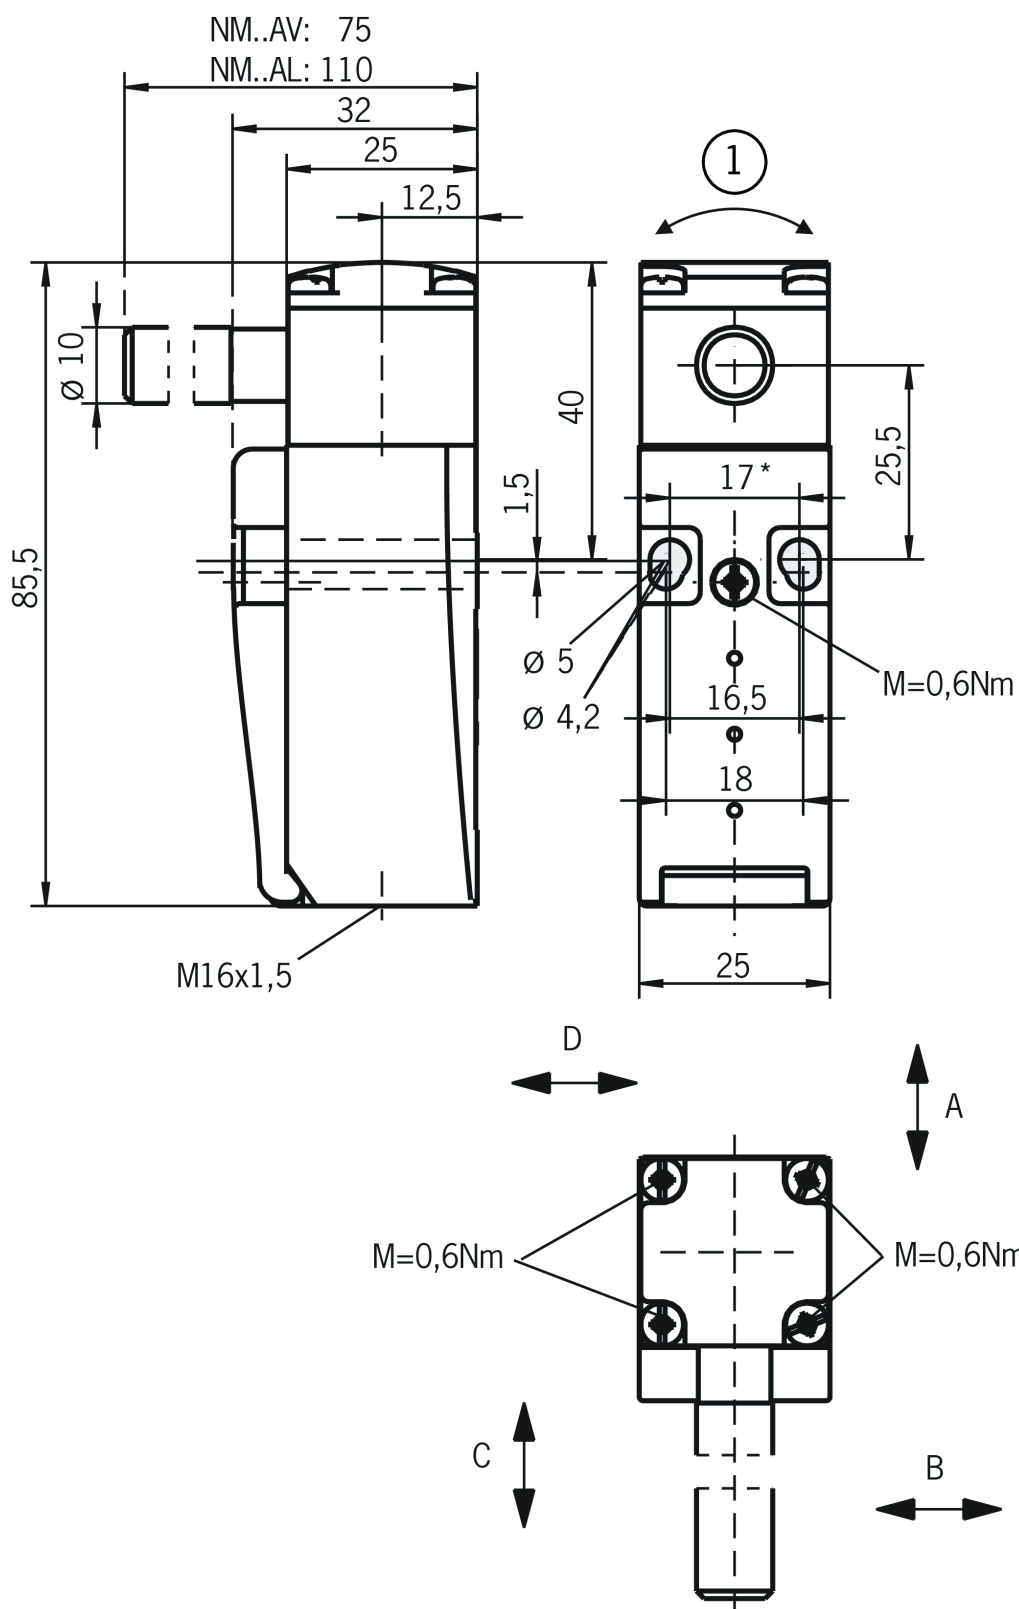

* fixed positioning for safety-related applications (M5)

1 Actuating direction

Connection examples

