

SN02D12-1514-M (Order no. 086599)

Series SN... 12 mm, mechanical

- ▶ Plunger spacing 12 mm
- ▶ Upright housing, small flange
- ▶ Degree of protection IP67 according to IEC 60529






Switching elements

ES 502 E Snap-action switching contact 1 NC + 1 NO

ES 514 Snap-action switching contact 1 NC  + 1 NO

On the usage of safety switching elements, the dog distance  must be maintained to achieve the positively driven travel. The dogs must be positively mounted according to EN ISO 14119, i.e. riveted, welded or secured in some other way against becoming loose.

Dimensional drawings

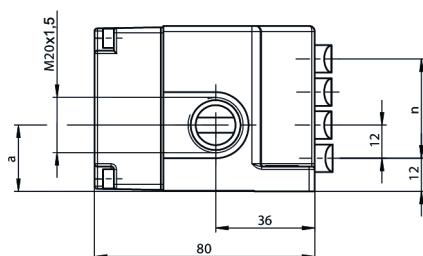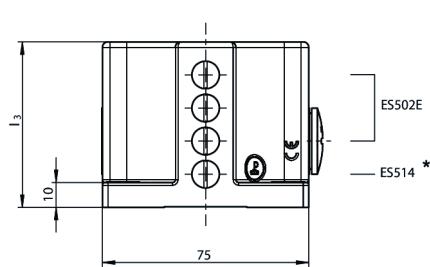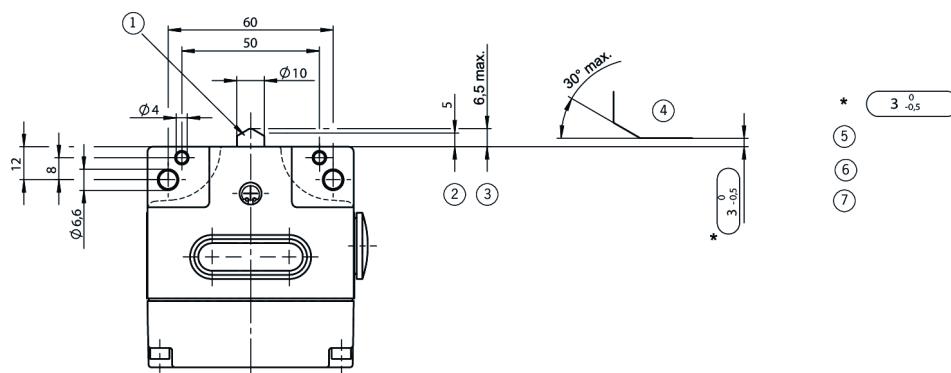

6	84	24
5	72	24
4	60	24
3	48	24
2	36	19
n		a
8		

*

Safety switching element ES514 positive opening. Positive opening function is dependent on maintaining this distance.

1 Depending on version

2 Operating point

3 Free position

4 Dog

5 Actuators (dogs) must be connected to the machine in a flush position.

6 Switch can be replaced only with the same type.

7 Pressure sensitive label 041734 applied.

8 Number of plungers

Connection examples

ES 514