


GP1-528A-M (Order no. 089725)

Safety switch GP, cable entry M20 x 1.5

- ▶ 3 x cable entry M20 x 1.5
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts



Approach direction



Horizontal and vertical
Can be adjusted in 90° steps


Switching element

528 Slow-action switching contact 1 positively driven contact $\ominus \rightarrow$ + 1 NO contact

Accessories required

Actuator is not included.

Dimensional drawings

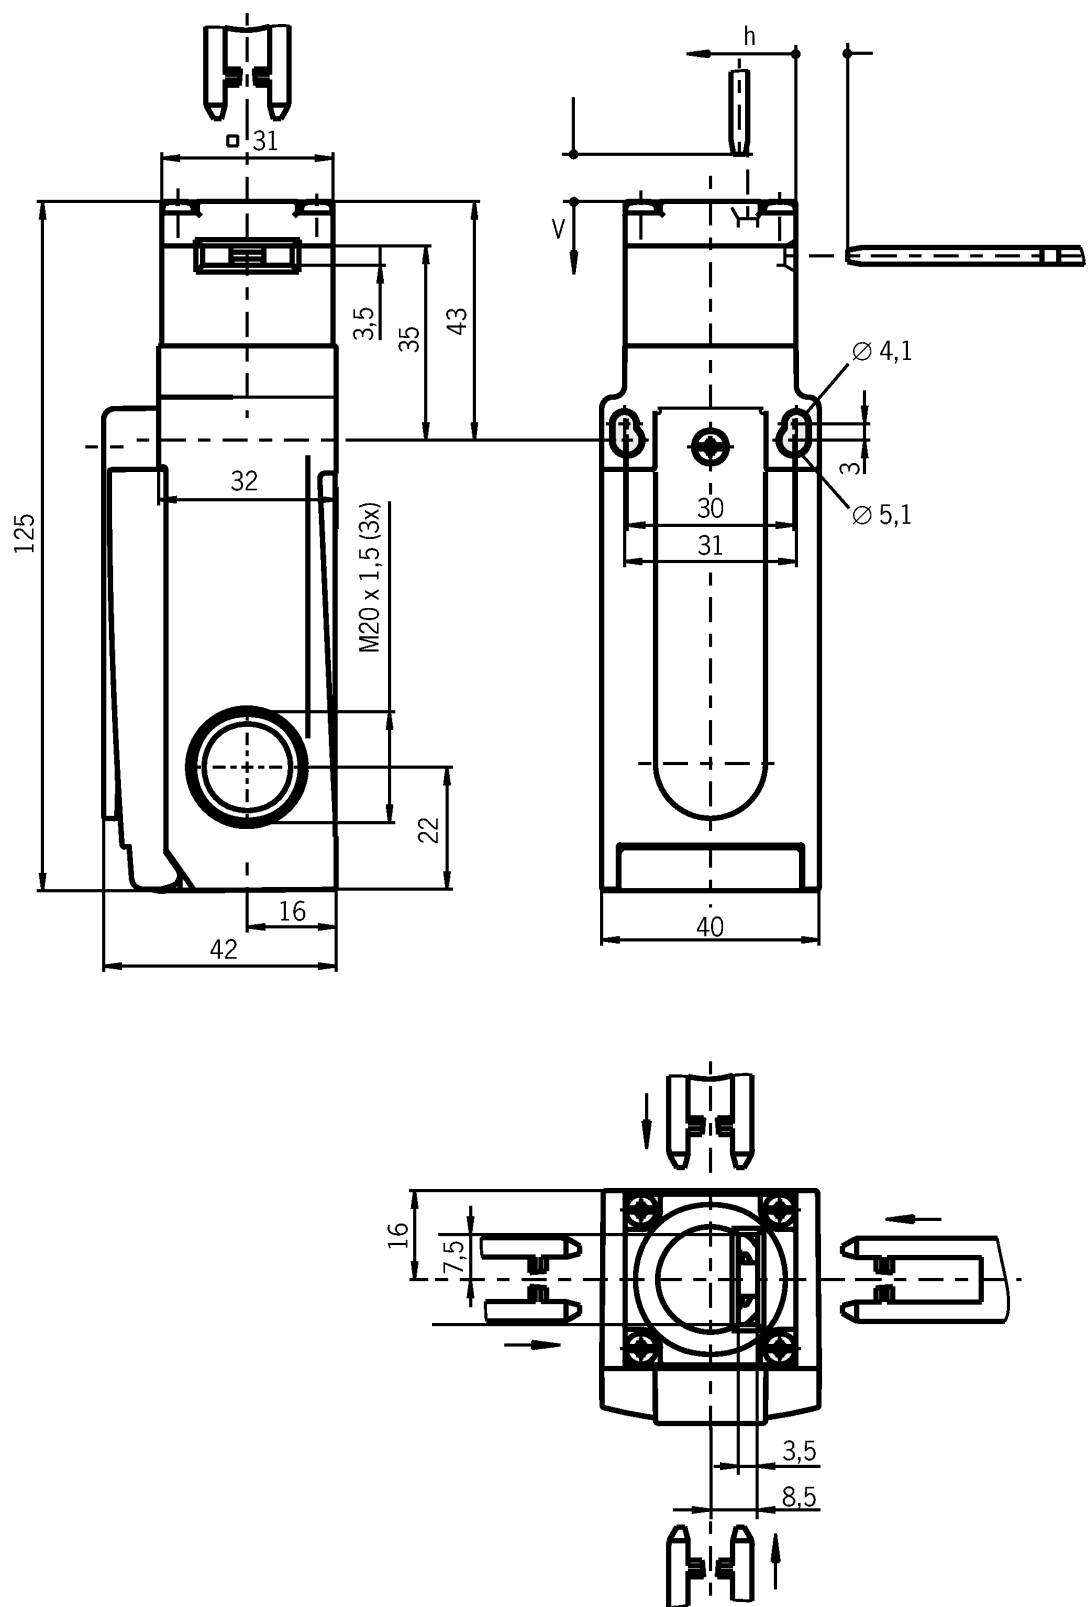

Connection examples

