


Project : _____

Type : _____

Drawn by : _____

Catalogue No. : _____

Date : _____

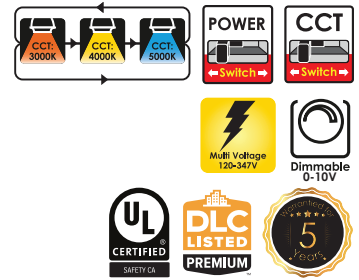

Specifications


Model No.		☐ VO-ALW15FT2-347-3WAY -P-W-D-X	☐ VO-ALW15FT2-347-3WAY -P-B-D-X	☐ VO-ALW50FT4-347-3WAY -P-W-D-X	☐ VO-ALW50FT4-347-3WAY -P-B-D-X	☐ VO-ALW100FT8-347-3WAY -P-W-D-X	☐ VO-ALW100FT8-347-3WAY -P-B-D-X
General	Watts	10-13-15W	10-13-15W	30-40-50W	30-40-50W	60-80-100W	60-80-100W
	HID Equivalent	Min.26W, Max. 40W	Min.26W, Max. 40W	Min.78W, Max. 130W	Min.78W, Max. 130W	2xMin.78W, Max. 130W	2xMin.78W, Max. 130W
	Lumen	1300-1690-1950LM	1300-1690-1950LM	3900-5200-6500LM	3900-5200-6500LM	7800-10400-13000LM	7800-10400-13000LM
	Efficiency	130LM/W	130LM/W	130LM/W	130LM/W	130LM/W	130LM/W
	CCT		3000/4000/5000 ADJ	3000/4000/5000 ADJ	3000/4000/5000 ADJ	3000/4000/5000 ADJ	3000/4000/5000 ADJ
	Volts	AC120-347V	AC120-347V	AC120-347V	AC120-347V	AC120-347V	AC120-347V
	CRI	>80	>80	>80	>80	>80	>80
	Beam Angel	120degree	120degree	120degree	120degree	120degree	120degree
	Hours Rated	50000 hours	50000 hours	50000 hours	50000 hours	50000 hours	50000 hours
	Installation ways	Pendant, wall mounted, surface mounted	Pendant, wall mounted, surface mounted	Pendant, wall mounted, surface mounted	Pendant, wall mounted, surface mounted	Pendant, wall mounted, surface mounted	Pendant, wall mounted, surface mounted
Electrical	IP rating	IP20	IP20	IP20	IP20	IP20	IP20
	Linkable	Yes Max. linkable qty: 48pcs	Yes Max. linkable qty: 48pcs	Yes Max. linkable qty: 16pcs	Yes Max. linkable qty: 16pcs	Yes Max. linkable qty: 8pcs	Yes Max. linkable qty: 8pcs
	Operating Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz
	Power Factor	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9
	Flicker percentage	<5%	<5%	<5%	<5%	<5%	<5%
	Surge Protection	L/N-1KV	L/N-1KV	L/N-1KV	L/N-1KV	L/N-1KV	L/N-1KV
	Operating Temperature	-20°C TO 40°C	-20°C TO 40°C	-20°C TO 40°C	-20°C TO 40°C	-20°C TO 40°C	-20°C TO 40°C
Physical	Dimension	23.62X2.95X2.36 in	23.62X2.95X2.36 in	47.24X2.95X2.36 in	47.24X2.95X2.36 in	94.49X2.95X2.36 in	94.49X2.95X2.36 in
	Housing	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
	Housing finish color	White, RAL9016	Black, RAL9011	White, RAL9016	Black, RAL9011	White, RAL9016	Black, RAL9011
	Diffuser material	PC	PC	PC	PC	PC	PC
	Weight	3.09lb	3.09lb	5.07lb	5.07lb	9.7lb	9.7lb
Additional Information	Rated For Enclosed Fixture	3CCT+3Power adjustable	3CCT+3Power adjustable	3CCT+3Power adjustable	3CCT+3Power adjustable	3CCT+3Power adjustable	3CCT+3Power adjustable
	Warranty	5 years	5 years	5 years	5 years	5 years	5 years
Compliance	Safety Listing	CUL-Listed	CUL-Listed	CUL-Listed	CUL-Listed	CUL-Listed	CUL-Listed
	Location Rating	Damp	Damp	Damp	Damp	Damp	Damp
	Energy Star	No	No	No	No	No	No
	DLC Approved	Yes,DLC5.1 Premium	Yes,DLC5.1 Premium	Yes,DLC5.1 Premium	Yes,DLC5.1 Premium	Yes,DLC5.1 Premium	Yes,DLC5.1 Premium
DLC ID		S-YOOLBN	S-YOOLBN	S-OGYPIB	S-OGYPIB	S-EZFXHK	S-EZFXHK

Features & Specifications


Construction	- Aluminum housing, low profile, upscale design 3 CCTs and 3 Powers Selectable provides more options on site and save SKU in warehousing - Screwless end cap and buckle joint ensure tool-free connecting - Indirect/direct lighting mode for options - Various different installation accessories for different application: pendant, wall mounted, surface mounted - Various different accessories for different shape: L, T, X, V
	- Pendant - Optional accessories for different installation: wall mounted, surface mounted
Performance Data	- Available in 3000K/4000/5000K selectable color temperature 80+ CRI, SDCM<5 - Electrical ratings: 120-347 V - Estimated life of over 100,000 hours to L70 0-10V dimming driver - Flicker percentage<5%, meet IEEE standard - Operating temperature: -20°C to 40°C (-4°F to 104°F)
Compliances	- cULus certified for Damp locations - DLC5.1 Premium

Dimensions & Weights

Model.No	2FT	4FT	8FT
Size in. (mm)	23.62X2.95X2.36 in (600X75X60)	47.24X2.95X2.36 in (1200X75X60)	94.49X2.95X2.36 in (2400X75X60)
Net weight (lbs)	3.09lb	5.07lb	9.7lb
Package	1pc/box 6pcs/ctn	1pc/box 6pcs/ctn	1pc/box 4pcs/ctn

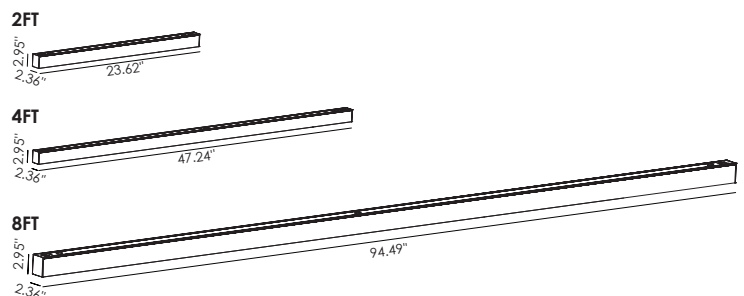

Product Details

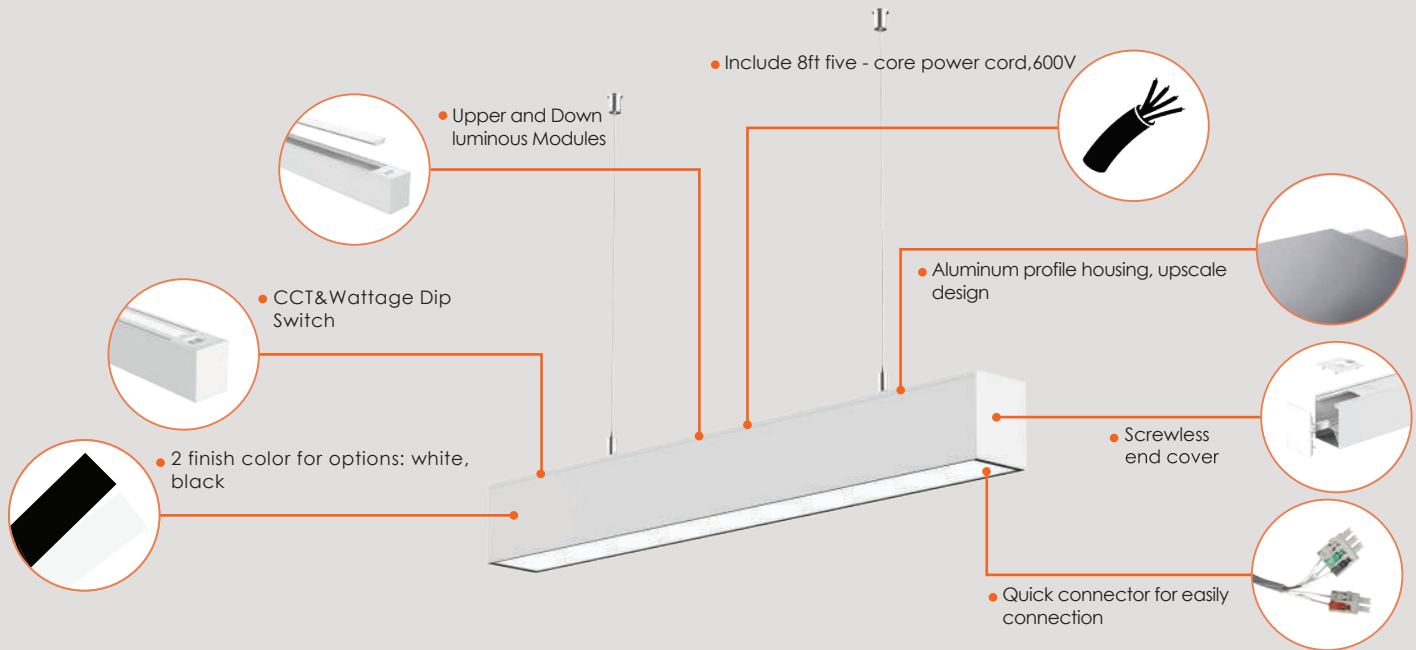

Connections



I connector, I shape; Max. linkable: 8FT-8PCS, 4FT-16PCS, 2FT-48PCS



X connector, X shape



L connector, rectangle shape



V connector, Hexagon shape(120 degree)



T connector, T shape