

CEM-A-LE05H-S2-104606 (Order no. 104606)

Read head CEM-A-LE05H-S2... with guard locking without guard lock monitoring with adjustable adhesive force

- ▶ Read head with guard locking without guard lock monitoring
- ▶ Locking force 650 N
- ▶ Adjustable adhesive force
- ▶ Up to category 4 according to EN ISO 13849-1
- ▶ Two safety screws M5x16 included



Combination options


Suitable for connection to a CES-AZ evaluation unit

Adjustable adhesive force


This version has an adhesive force also with the guard locking switched off. In this way it is intended, for example, to prevent the safety door from opening due to vibration or similar. The adhesive force can be adjusted using a programming adapter to 70 N, 110 N or 150 N.

Important: To change the preset adhesive force, you will need a programming adapter.

Approach direction

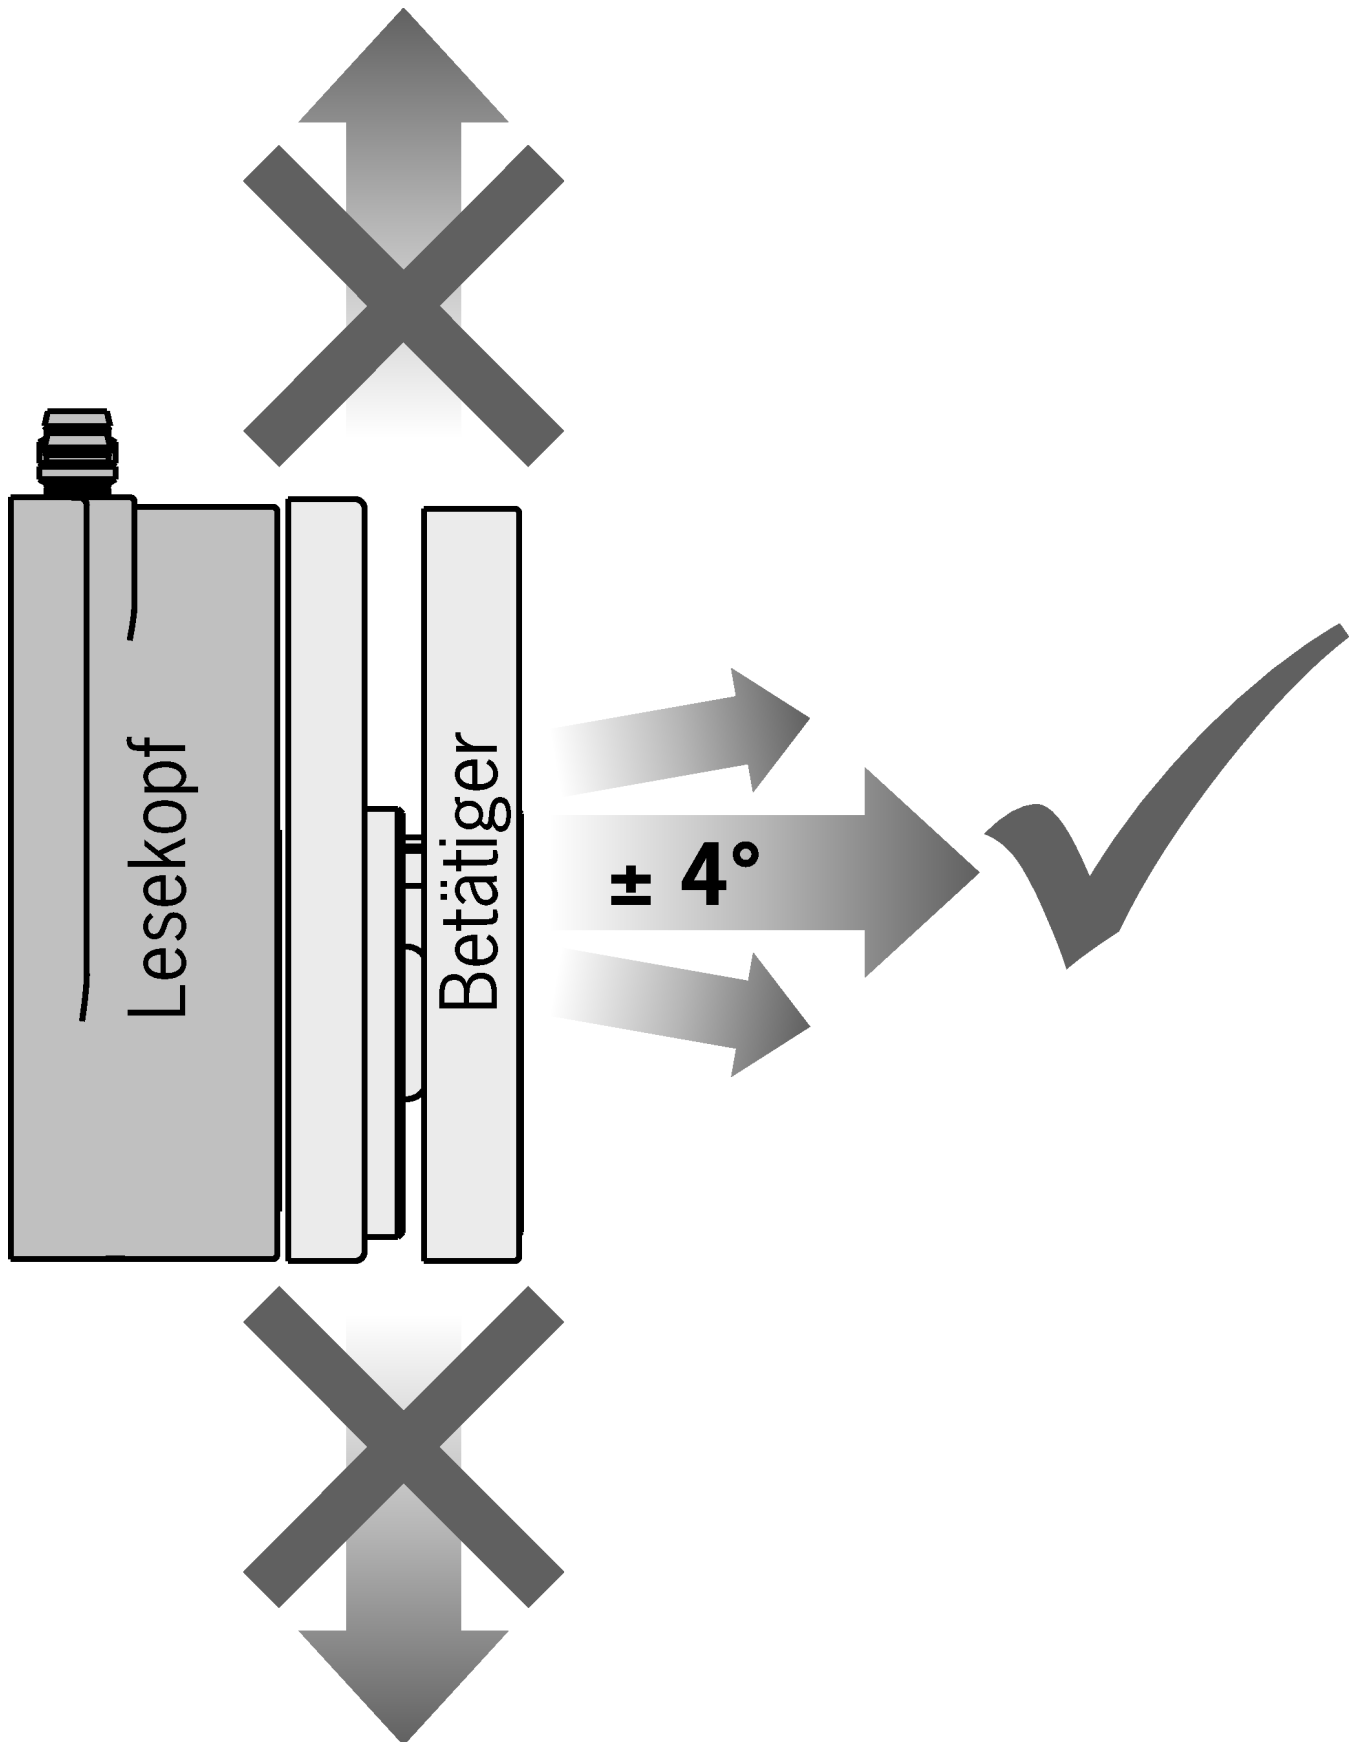

Typical operating distance

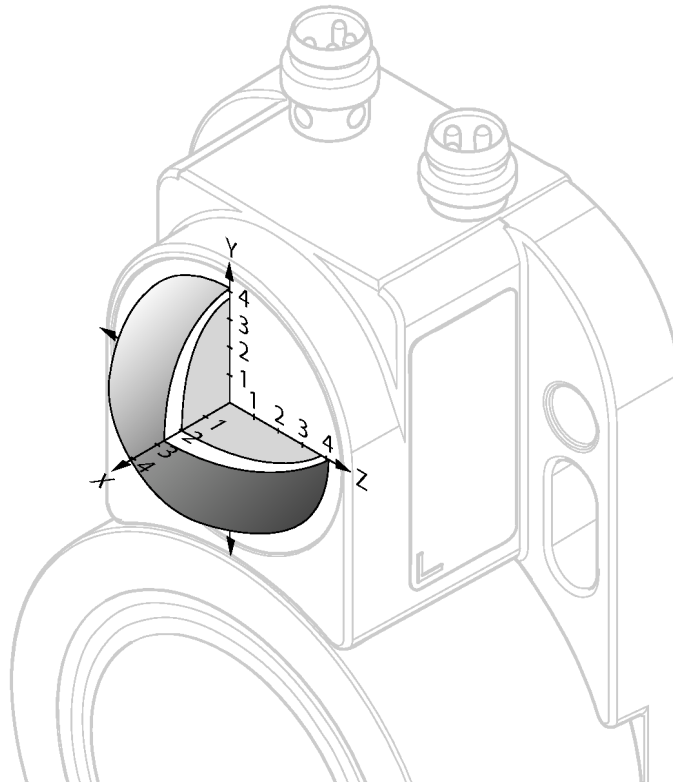

Note assured release distance $s_{ar} = 20 \text{ mm}$ for internal component failure. Safety outputs are safely switched off.