

## MGB-L1-ARA-AD3A1-S1-R-119757 (Order no. 119757)

### Locking module MGB-L1-ARA..., (guard locking by spring force) with 3 pushbutton, RC18

- ▶ Guard locking with guard lock monitoring
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ 1 pushbutton (illuminated, bu)
- ▶ 1 pushbutton (illuminated, with button labeling "Unlocked," wh)
- ▶ 1 pushbutton (illuminated, with button labeling "Locked," wh)
- ▶ With plug connector RC18
- ▶ Unicode



### Guard locking type

MGB- The locking arm is held in the locked position by spring force and is unlocked by solenoid force  
L1... (closed-circuit current principle, mechanically locked).

### Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

### LED indicator

The LED indicator indicates all important system and status information.


### Monitoring outputs

- OD ON when the door is closed
- OT Bolt tongue inserted into the evaluation module
- OL Guard locking solenoid in locked position
- OI Diagnostics; there is a fault

### Pushbuttons

- S1 1 NO contact, blue, illuminated
- S2 1 NO contact, white, illuminated (symbol: unlocked)
- S3 1 NO contact, white, illuminated (symbol: locked)

**Dimensional drawings**

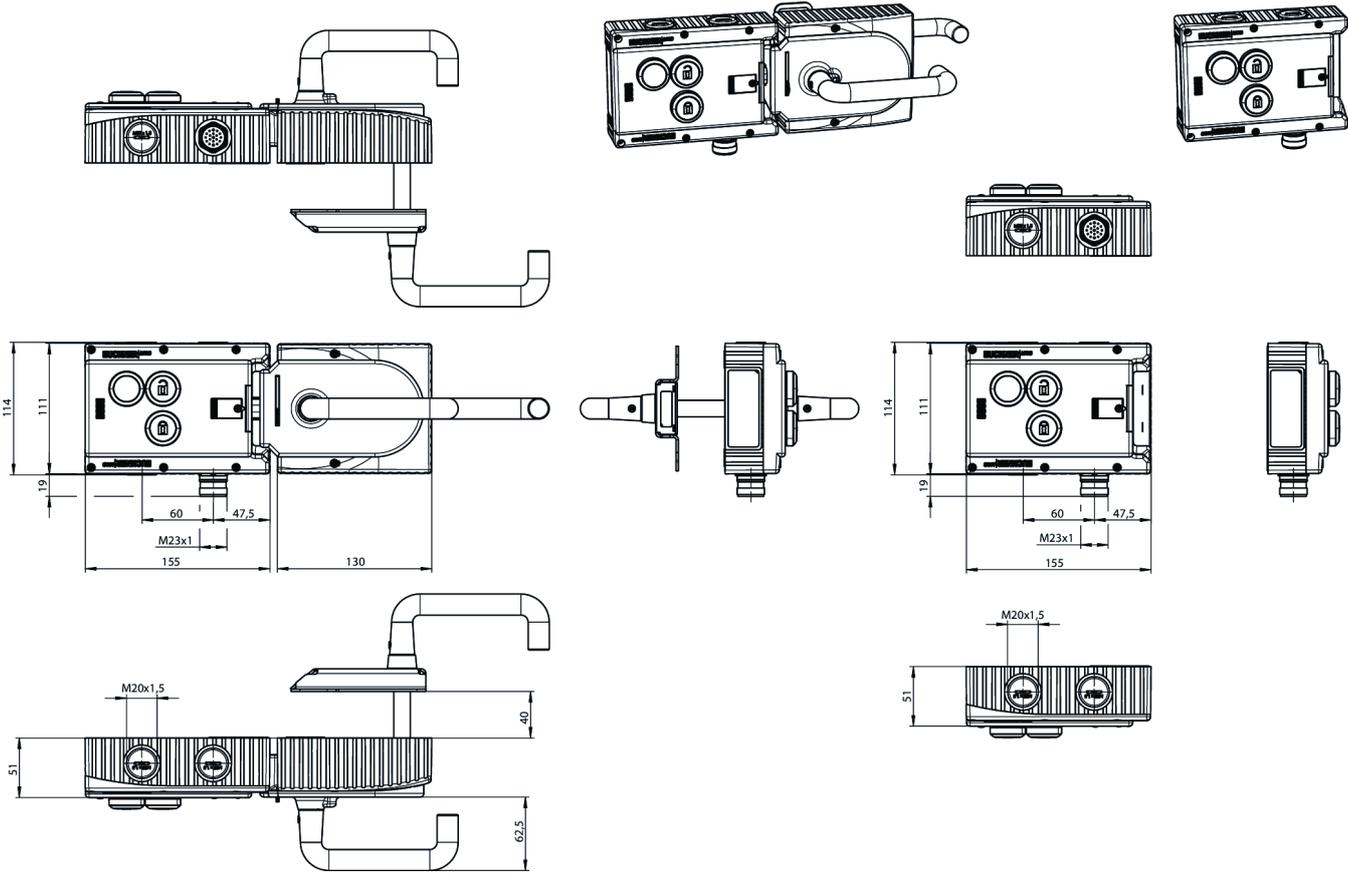

Dimensional drawings

