

## MGB-L1B-PNA-L-159092 (Order no. 159092)

**Evaluation module and bus module MGB-L1...-PN... (guard locking by spring force) with 4 control elements, emergency release, 7/8" and M12 plugs**

- ▶ Guard locking with guard lock monitoring
- ▶ Emergency stop according to ISO 13850, illuminated
- ▶ 4 illuminated pushbuttons
- ▶ including adhesive labels
- ▶ Connection via 7/8" and M12 plugs
- ▶ Pre-assembled on mounting plates
- ▶ Integrated Profinet RT switch
- ▶ Unicode



### **Profinet connection**

7/8" plugs according to ANSI/B93.55M-1981 and M12 plugs (d-coded) according to IEC 61076-2-101

### **Profinet RT switch**

Point-to-point topology network structure due to integrated RT switch.


### **Flexible use as interlocking or guard locking**

By means of the corresponding evaluation of the safe device data by the control system, use can be as either interlocking or guard locking (with or without monitoring).

### **Emergency stop illuminated**

Emergency stop with illumination that can be controlled as required.

## Dimensional drawings

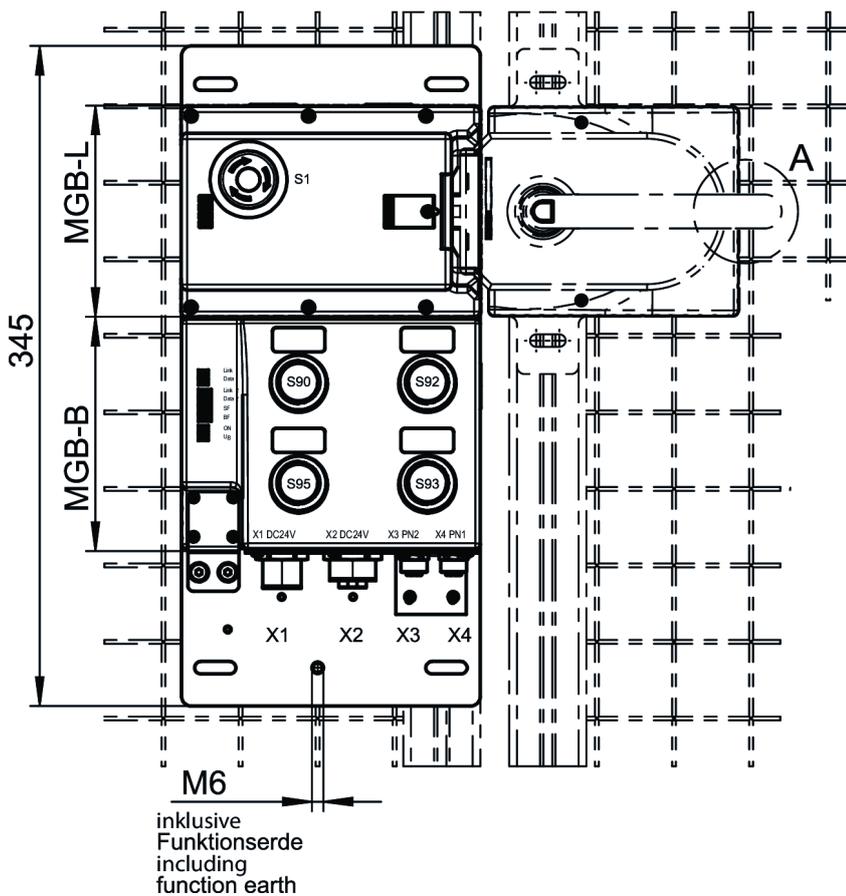

Detail A  
 Sperrverriegelung im  
 ausgefahrenen Zustand  
 Automatic lockoutbar in "open" position.

