


SPERREINSATZ-Z-ST (Order no. 102397)

Lockout bar NZ.VZ/TZ, 2 holes

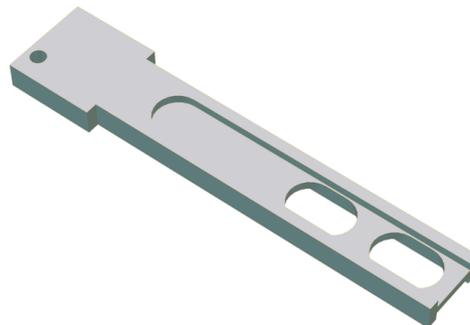

With the safety door open, it can be slid into the actuating head on a switch type 2 (NZ.VZ/TZ) instead of an actuator. Removal can be prevented using a commercially available padlock. For the protection of persons in areas with a possible hazard.

Cannot be used in combination with the protective plate.

Technical data

Mechanical values and environment

Number of bores	2
Pin diameter	0 ... 9.5 mm
Storage temperature	-25 ... 70 °C
Material	Stainless steel