


MGB-L2B-EIA-R-136509 (Order no. 136509)

Technical data

Approvals

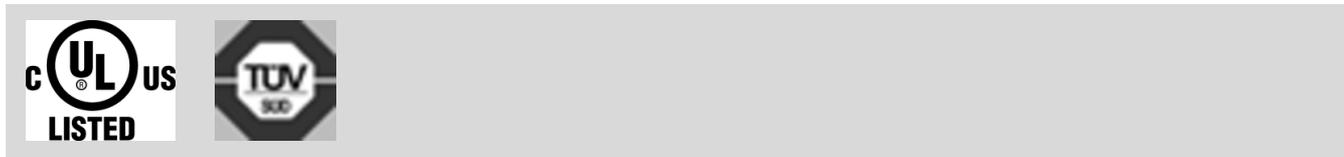

Workspace

Secured switch-off distance s_{ar}

Only with sliding door 20 mm

(Only applies for use on sliding doors with deactivated guard lock monitoring)

Operating and display elements

Occupancy diagram

B1

L1

Item	Color	Extras	Note slide-in label	Version	Switching element	Slide-in label	Number	Designation1	LED
1		with adhesive ring		Emergency stop illuminated	2 PD				
90				Illuminated pushbutton	1NO				
91				Illuminated pushbutton	1NO				
92				Illuminated pushbutton	1NO				

Electrical connection values

Connecting cable

Ethernet Ethernet/IP cable, at least cat. 5e

Rated insulation voltage U_i 75 V

Rated impulse voltage U_{imp} 0.5 kV

EMC protection requirements In accordance with EN 61000-4 and EN 61326-3-1

maximum feed-in current in the connection block

X1, X2 max. 4000 mA

Safety class

III

Current consumption

max. 500 mA

Transponder coding

Unicode

Degree of contamination (external, according to EN 60947-1)

3

Power supply X1

Fuse

external min. 1 A slow blow

Operating voltage DC

L1 24 V DC -15% ... +10%
((reverse polarity protected, regulated, residual ripple<5%, PELV))

Auxiliary voltage DC

L2 24 V DC -15% ... +10%
(The auxiliary voltage is not required for the MGB system)

Power supply X2

Operating voltage DC

L1 24 V DC -15% ... +10%
(For looping through for connected devices)

Auxiliary voltage DC

L2 24 V DC -15% ... +10%
(For looping through for connected devices)