

MGB-L1-APA-AH2A1-S1-R-115885 (Order no. 115885)

Locking module MGB-L1-APA... (guard locking by spring force) with 1 indicator, RC18

- ▶ Guard locking with guard lock monitoring
- ▶ 1 indicator (illuminated, gn)
- ▶ With plug connector RC18
- ▶ Unicode



Guard locking type

MGB- The locking arm is held in the locked position by spring force and is unlocked by solenoid force
L1... (closed-circuit current principle, mechanically locked).

Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

LED indicator

The LED indicator indicates all important system and status information.










Monitoring outputs

- OT Bolt tongue inserted into the evaluation module
- OI Diagnostics; there is a fault

Indicators

H2 LED, green

Dimensional drawings

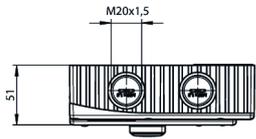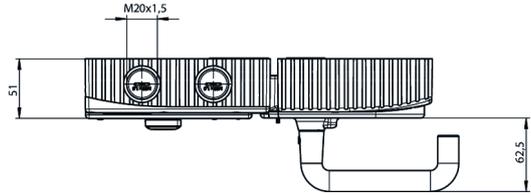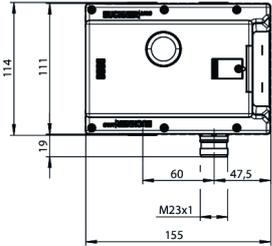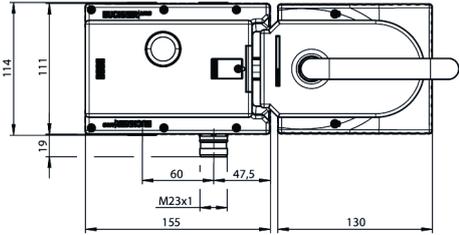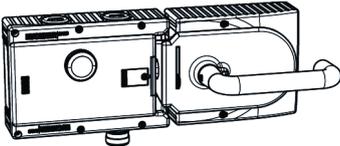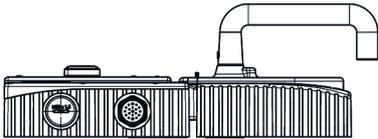

Dimensional drawings

