

NZ1RS-3131-M-EX (Order no. 094169)

Safety switch NZ.RS ATEX, steel roller ø 12 mm, roller plunger, cable entry M20 x 1.5

- ▶ ATEX version
- ▶ Roller plunger, steel roller ø 12 mm
- ▶ Version C according to EN 50041
- ▶ Cable entry M20 x 1.5
- ▶ 2 pos. driven contact
- ▶ 2 NO contacts



Approach direction



Horizontal

Can be adjusted in 90° steps

Version ATEX

Suitable for use in zones 2 and 22 (gases and dusts).

Areas of application:

 II 3 G


 II 3 D

Use the cable gland supplied.

Switching element

3131H Slow-action switching contact 2 positively driven contacts  + 2 NO contact

Dimensional drawings

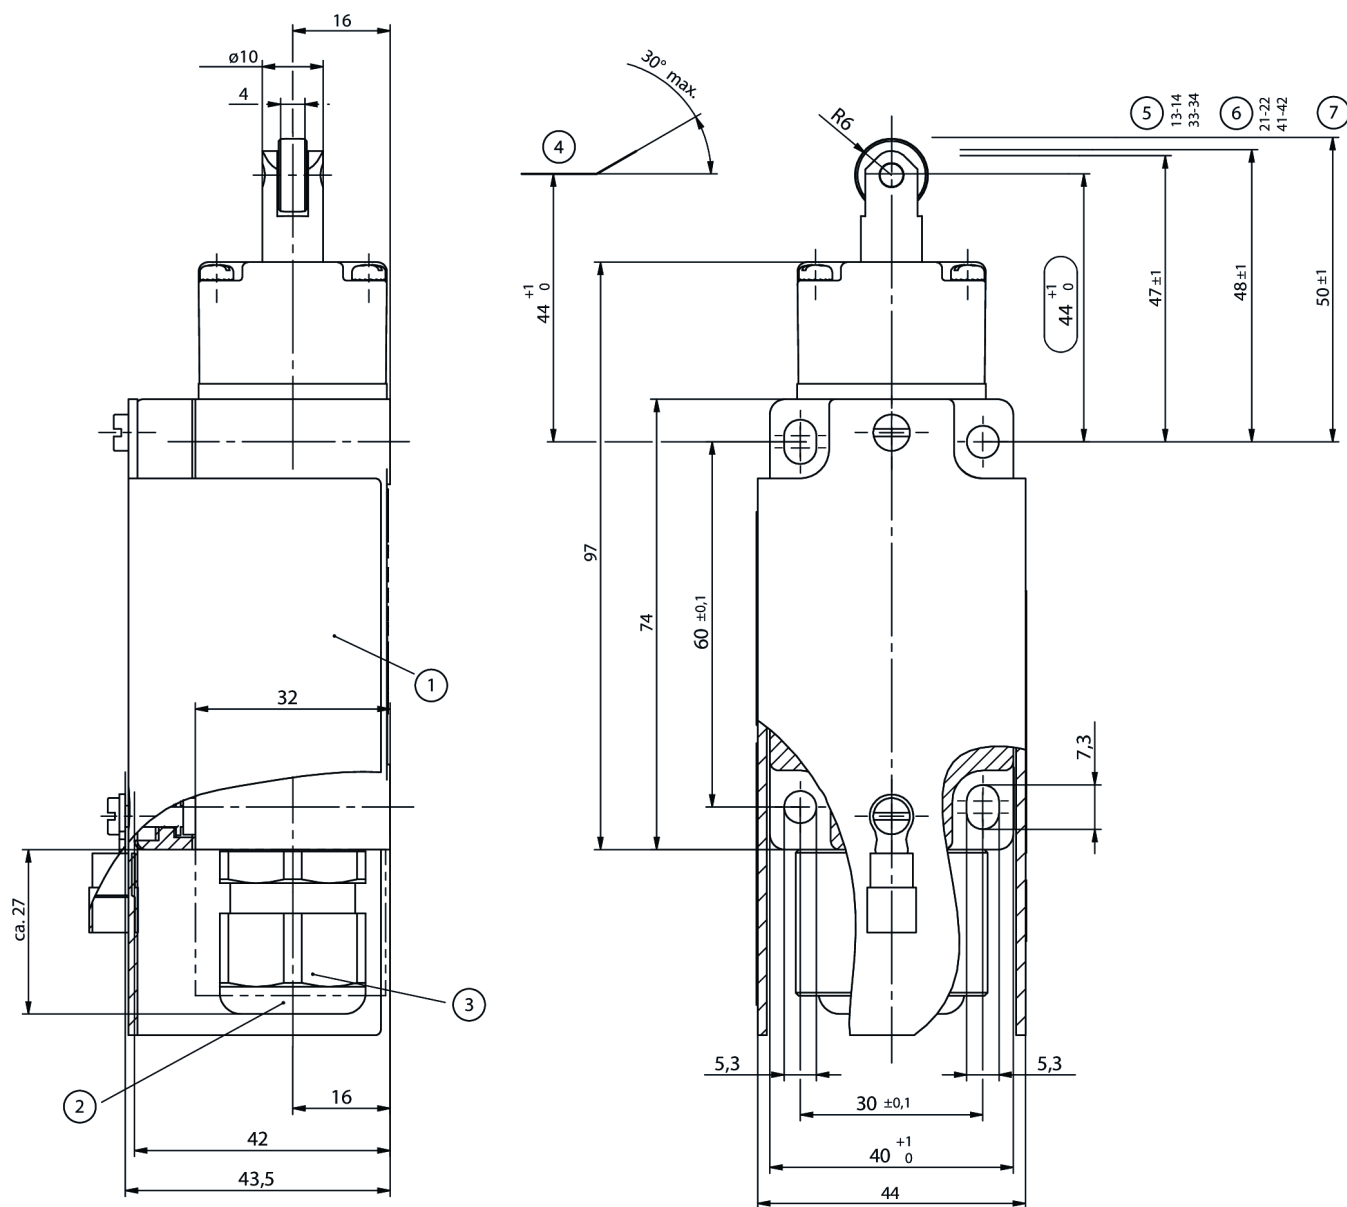

Connection examples

