

CES-A-UBA-01 (Order no. 096960)

Evaluation unit CES-A-UBA-01 (for 1 read head)

- ▶ 1 read head can be connected
- ▶ 2 safety contacts (relay contacts)
- ▶ 1 internal normally open contact per safety contact
- ▶ Multicode evaluation unit
- ▶ Category 3 / PL e according to EN ISO 13849-1



Multicode evaluation unit

Every suitable actuator is detected by the evaluation unit.

Category according to EN ISO 13849-1

Due to two redundant relay outputs (safety outputs) with internally monitored contacts, suitable for:

- ▶ Category 3 / PL e according to EN ISO 13849-1

To achieve the stated category, both safety contacts must always be evaluated.

Actuating range

The evaluation unit enables a reduced actuating range.


TST Input for self-test

OUT Monitoring output (semiconductor)

ERR Diagnostic output

GND Connected internally to 0V (not for high currents)

Dimensional drawings

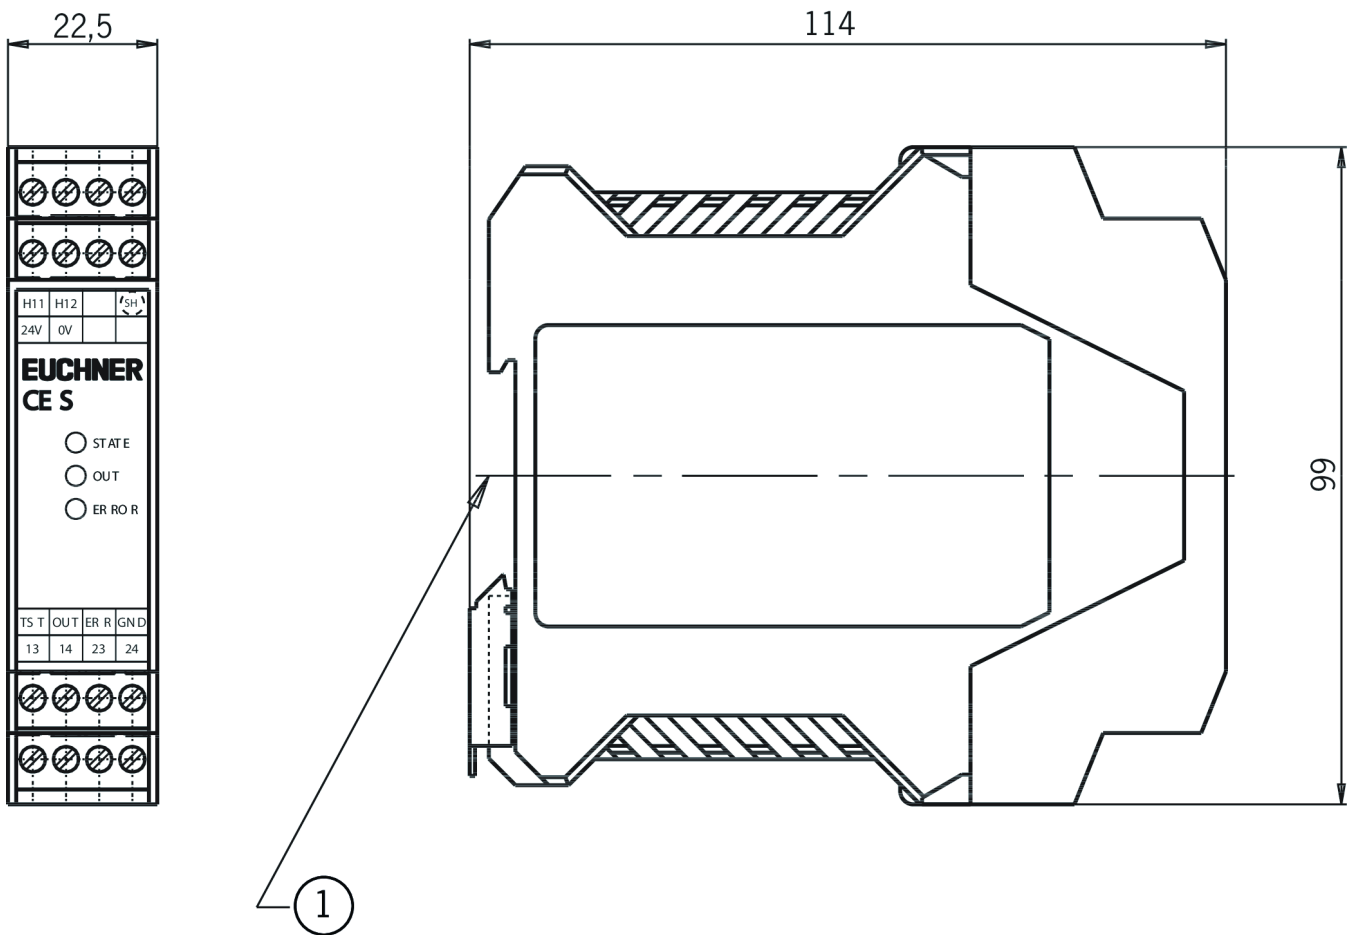

1 Suitable for 35 mm mounting rail according to EN 60715

Connection examples

