

NZ2HS-511SEM5C2376 (Order no. 115454)

Safety switch NZ.HS, lever arm with steel roller, plug connector M12

- ▶ Lever arm, steel roller \varnothing 18 mm
- ▶ Version A according to EN 50041
- ▶ Plug connector M12, 5-pin
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts



Approach direction



Horizontal

Can be adjusted in 90° steps


Switching direction adjustable

Right, left or both sides

Switching element

511 Snap-action switching contact, 1 positively driven contact \rightarrow + 1 NO contact

Dimensional drawings

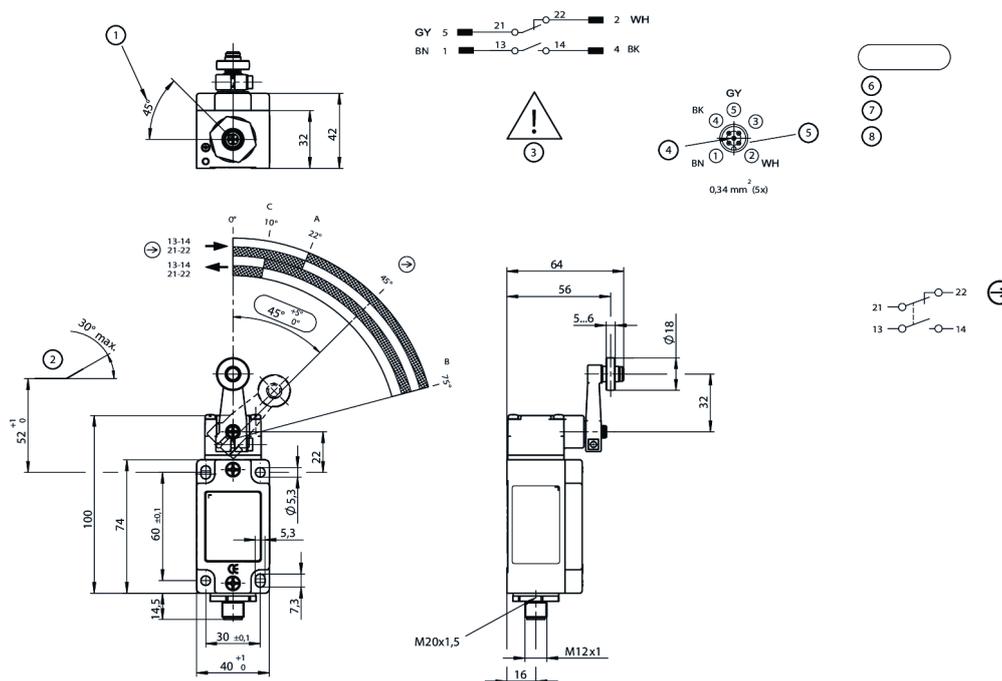

1 Guide lug aligned

2 Dog

3 without earth conductor

4 Not leading

5 5-pin

6 Positive opening function is dependent on maintaining this distance.

7 Actuator (dog) must be positively mounted on the machine.

8 Switch can be replaced only with the same type.

A Operating point

B End position

C Reset point

Connection examples

