

MGB2-L1-MLI-U-YD8A6-CA-R-161924 (Order no. 161924)

Locking module MGB2-L1-MLI... (3 pushbuttons, M12 plug connector for enabling switch, closed-circuit current principle, door hinge on right)

- ▶ Guard locking for the protection of persons or processes
- ▶ Locking module MGB2 for connection to a bus module MBM
- ▶ Interlocking with monitored guard locking
- ▶ Category 4/PL e for the evaluation of all safety functions
- ▶ 3 illuminated pushbuttons
- ▶ M12 plug connector for enabling switch
- ▶ Adjustable door hinge; factory setting: right
- ▶ Unicode
- ▶ Compatible with all Modular devices





Guard locking type

MGB2- Guard locking by spring force. Release by applying voltage to the guard locking solenoid.
L1... (closed-circuit current principle)



Door hinge

On the locking modules, the door stop can be changed from right to left and vice versa at any time with little effort.

Dimensional drawings

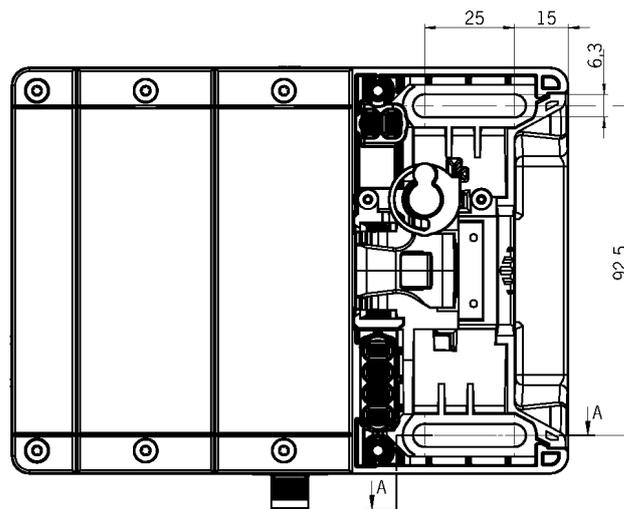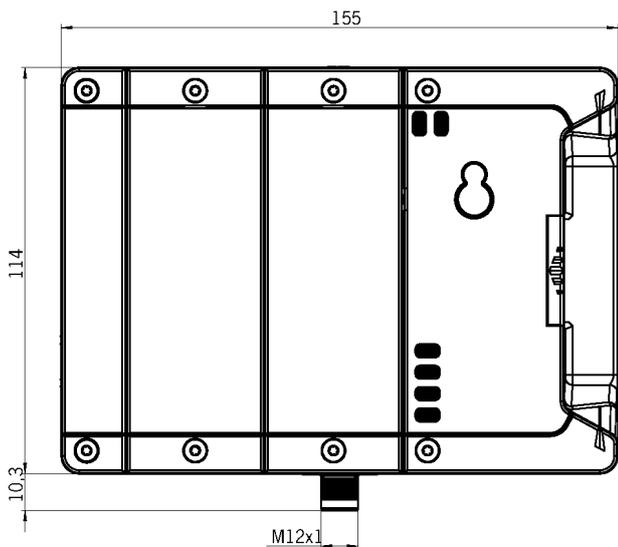


A-A

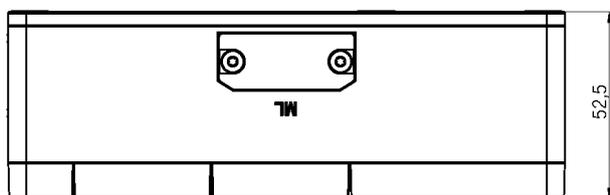

Dimensional drawings

...-R-...

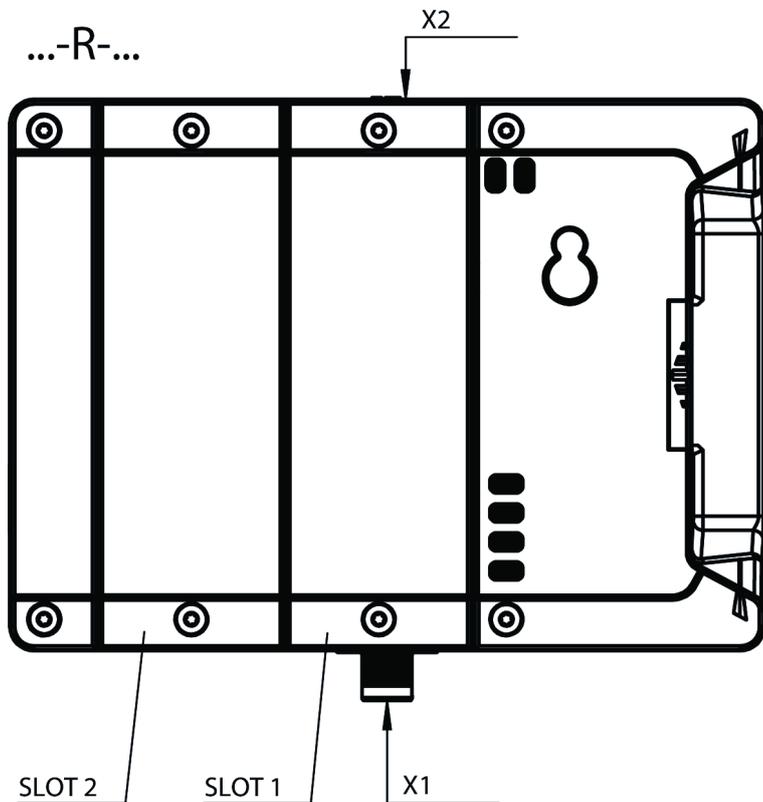

...-L-...

