

## MGB-A-TA-AR-SH-122369 (Order no. 122369)

### Teach-in adapter for MGB

- ▶ Teach-in adapter
- ▶ Optional accessories for teaching-in a new handle module for safety system with M23 plug connector.



### Connector assignment view X


Plug connector	Pin	Designation	Function
	2	FI1A	Enable input for channel A. For separate operation set DIP switch as per operating instructions.
	3	FI1B	Enable input for channel B. For separate operation set DIP switch as per operating instructions.
	6	UA/UB	Power supply for the guard locking solenoid (L1/L2), monitoring outputs and push button, DC 24 V must be present continuously.
	19	0 V	Ground for power supply UA/UB

### Connector assignment view Z

Plug connector	Pin	Designation	Function
	6	UA/UB	Power supply, DC 24 V.
	19	0 V	Ground for power supply UA/UB

**Dimensional drawings**


①



X




②

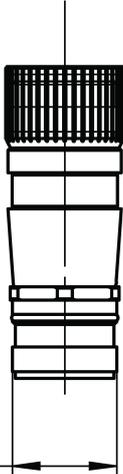

M23x1

Z

③



- 1 View of connection side Z
- 2 Teach-in adapter RC18 (pin)
- 3 View of connection side X

## Technical data

### Mechanical values and environment

Storage temperature	-25 ... 70 °C	
<b>Connection 1</b>		
Connection type	Plug connector M23	
Connection type	Female plug	
Plug connector designation	RC	
Number of pins	4 (2, 3, 6, 19)	
Plug lock	Screw connection	
Material	Plug lock	CuZn, nickel plated
	Plug housing	CuZn, nickel plated
<b>Connection 2</b>		
Connection type	Plug connector M23	
Connection type	Male plug	
Number of pins	2 (6, 19)	
Plug lock	Screw connection	
Material	Plug housing	CuZn, nickel plated
	Plug lock	CuZn, nickel plated
<b>Miscellaneous</b>		
Compatibility	For certain devices MGB-L	