

NZ1PS-528L060-M (Order no. 090430)

Safety switch NZ.PS, adjustable lever arm with steel roller, cable entry M20 x 1.5

- ▶ Lever arm, steel roller \varnothing 18 mm
- ▶ Cable entry M20 x 1.5
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts
- ▶ LED indicator: AC/DC 12-60 V red



Approach direction



Horizontal

Can be adjusted in 90° steps

Switching direction adjustable

Right, left or both sides

Lever arm adjustment

Lever arm length can be adjusted from 28 mm to 78 mm in steps of 12.5 mm.


LED indicator

The switch has one freely assignable LED indicator.

Switching element

528H Slow-action switching contact 1 positively driven contact $\ominus \rightarrow$ + 1 NO contact

Dimensional drawings

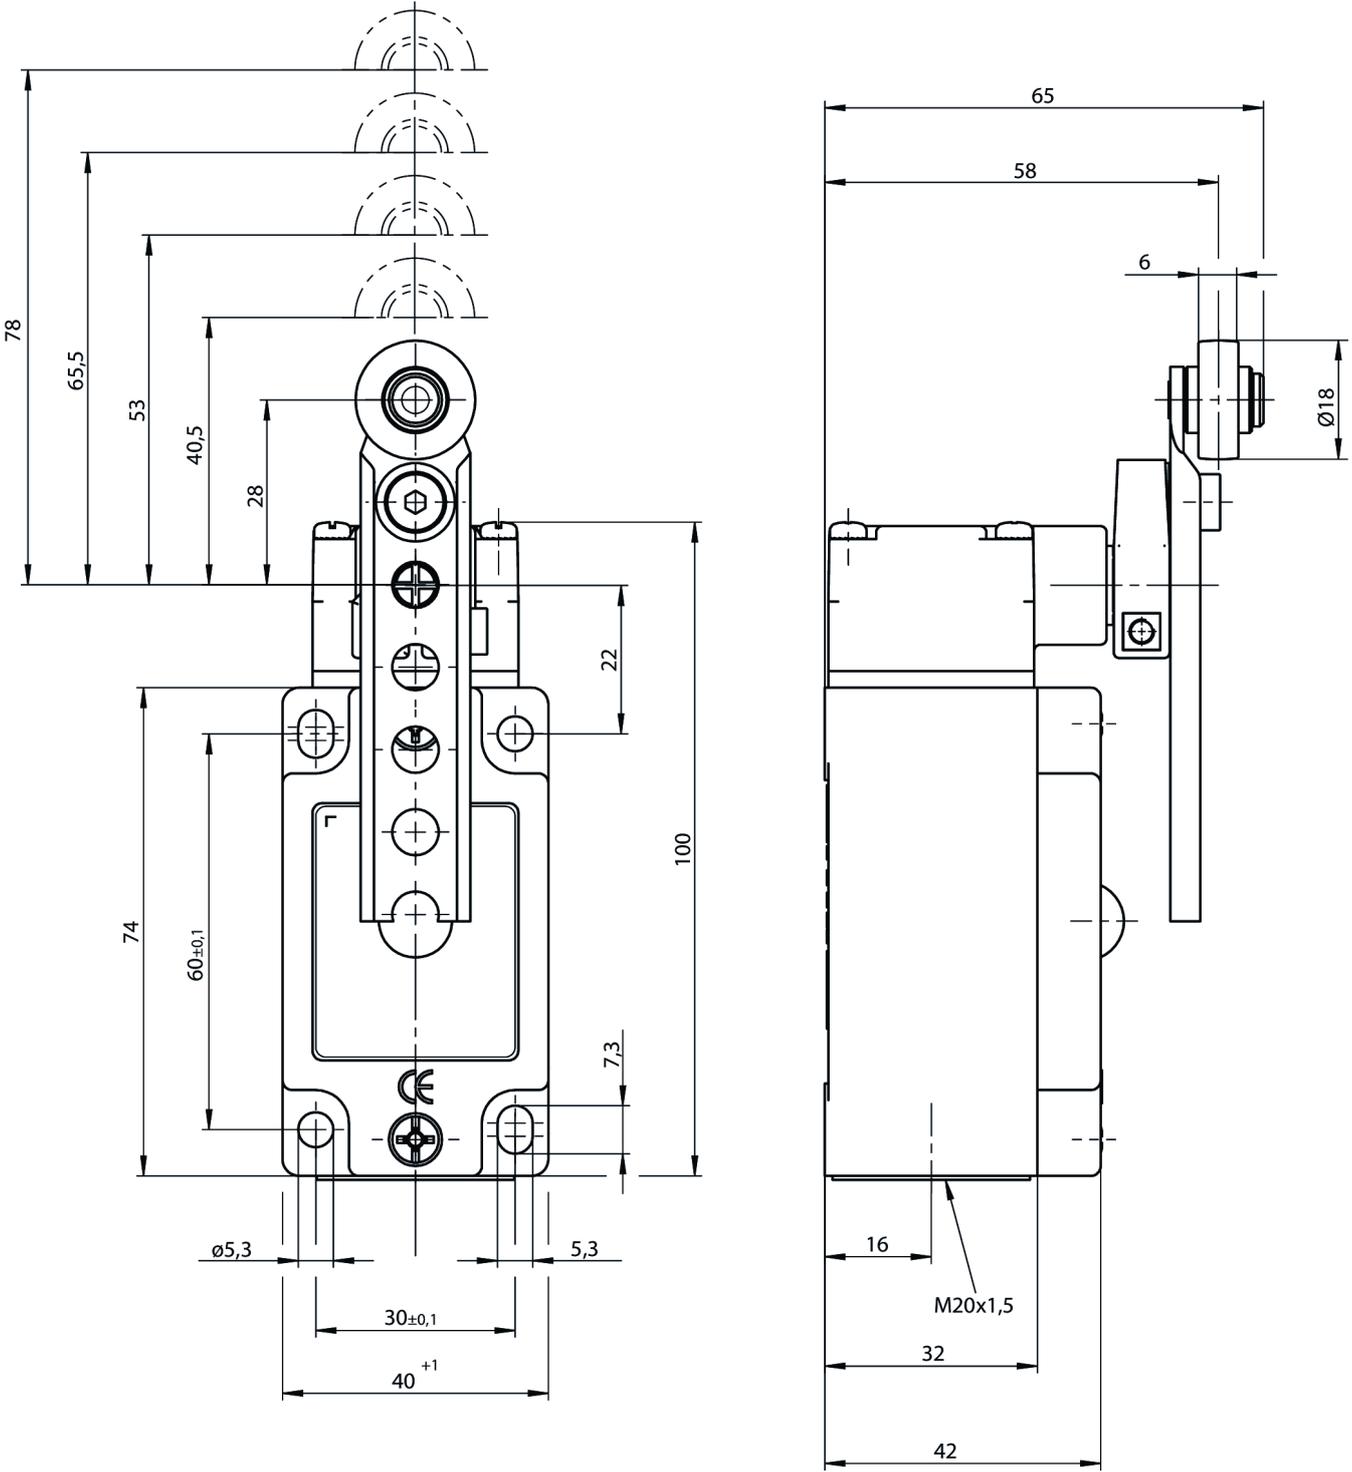

Connection examples

