


## C-MINF10-10X1,0PV15,2-MA-100953 (Order no. 100953)

### Connecting cable with plug connector MR10, 10-pin, 15.2 m


- ▶ MR10 female plug, 10-pin
- ▶ Straight plug connector
- ▶ PVC cable
- ▶ Cable length 15.2 m
- ▶ With flying lead

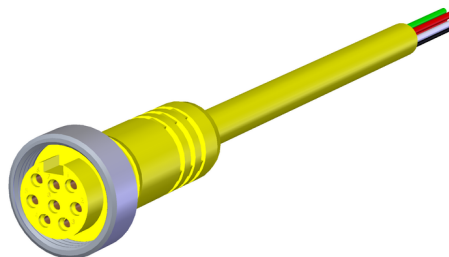

### Connector assignment

	1	OG
	2	BU
	3	WH/BK
	4	RD/BK
	5	GN/BK
	6	OG/BK
	7	RD
	8	GN/YE
	9	BK
	10	WH

### Dimensional drawings

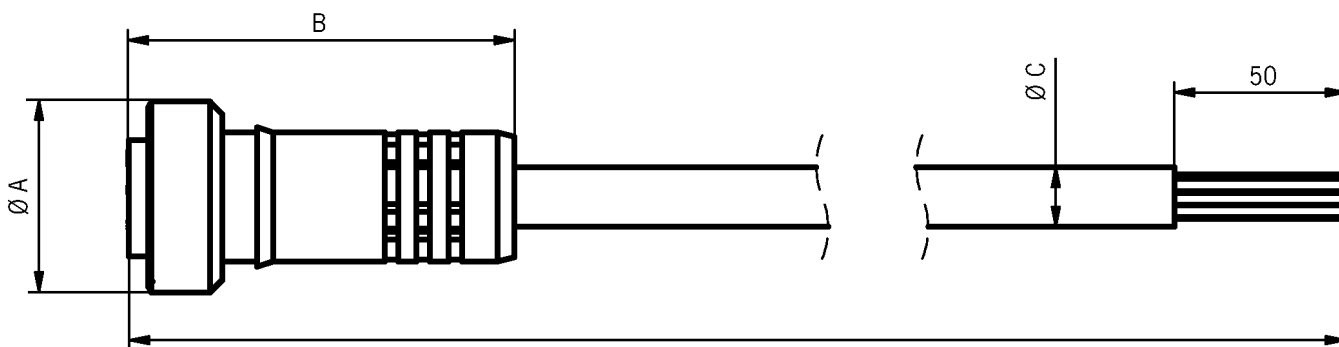

Dimension A  $\varnothing$  32 Dimension B 64 Dimension C  $\varnothing$  9.8

## Technical data

### Approvals



### Electrical connection values

Rated voltage	300 V
---------------	-------

### Mechanical values and environment

Conductor cross-section	18 AWG
Number of conductors	10
Storage temperature	-40 ... 80 °C
Cable type	straight
Cable diameter	approx. 9.8 mm
Cable length	15.2 m
Drag chain suitability	No
Ambient temperature	-40 ... 80 °C
Material	Sheath PVC

#### Connection 2

Conductor end	Sheath stripped
Connection type	flying lead

#### Connection 1

Connection type	Plug connector BHA10
Connection type	Female plug
Cable outlet	straight
Number of pins	10
Degree of protection	IP67
Plug lock	Screw connection

Material

Plug lock Plastic