


NZ1PS-2131-MC2454 (Order no. 126983)

Technical data

Approvals

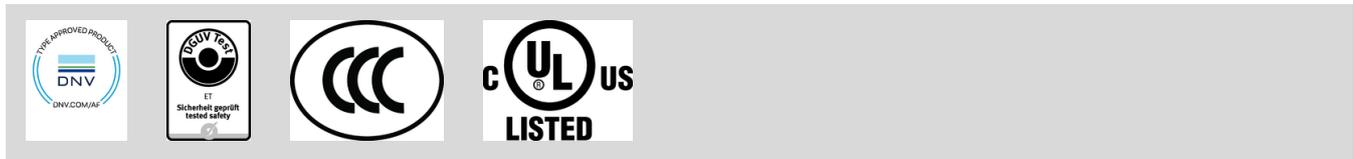

Electrical connection values

Fuse	max. 4 A gG
Connection cross section	0.34 ... 1.5 mm ²
Rated insulation voltage U _i	250 V
Rated impulse voltage U _{imp}	2.5 kV
Utilization category	
	DC-13 4 A 24 V
	AC-15 4 A 230 V

Switching current

min. at DC 24V 1 mA

Safety class	I
thermal rated current I _{th}	4 A

Mechanical values and environment

Anfahrsgeschwindigkeit	0.5 ... 30 m/min
Connection type	
	1 x M20 x 1.5
Number of NO contacts	1
Number of door position positively driven contacts	3
Actuating element	
	Slide bearing metal Lever arm adjustable (d roller = 18 mm, length = 28 and 40.5 mm)
Actuating force	min. 15 N
Installation orientation	any
Storage temperature	-25 ... 80 °C
Mechanical life	30 x 10 ⁶

