


## TZ2LE024M-C1816 (Order no. 087992)

### Safety switch TZ, cable entry M20 x 1.5, release with pushbutton

- ▶ Cable entry M20 x 1.5
- ▶ Release using pushbutton
- ▶ LED indicator
- ▶ Actuating head fitted left
- ▶ Open-circuit current principle



### Approach direction



Horizontal

Can be adjusted in 90° steps

### Guard locking principle

Open-circuit current (power on to lock): On a guard with guard locking based on the open-circuit current principle, the guard is locked until the power supply to the guard locking solenoid is interrupted. Unlocking is by spring force. The term electrical guard locking is also used.

### LED indicator

The switch has two freely assignable LED indicators (red and green).

### Switching element

SK 528 Slow-action switching contact

Contacts for door monitoring: 1 positively driven contact  + 1 NO contact


ÜK 528 Slow-action switching contact

Contacts for guard locking: 1 positively driven contact  + 1 NO contact

### Accessories required


Actuator is not included.

Functional drawings

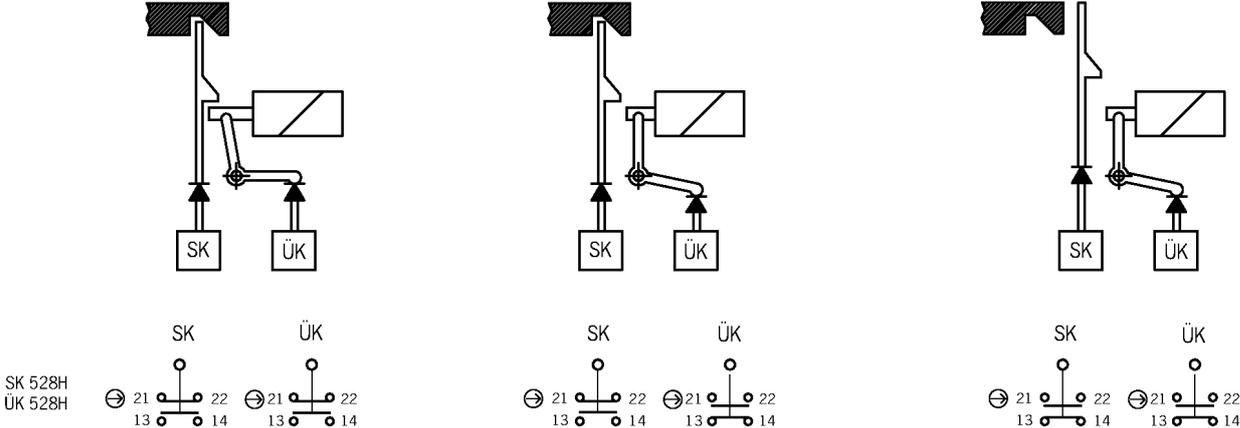


## Dimensional drawings

### TZ.L...

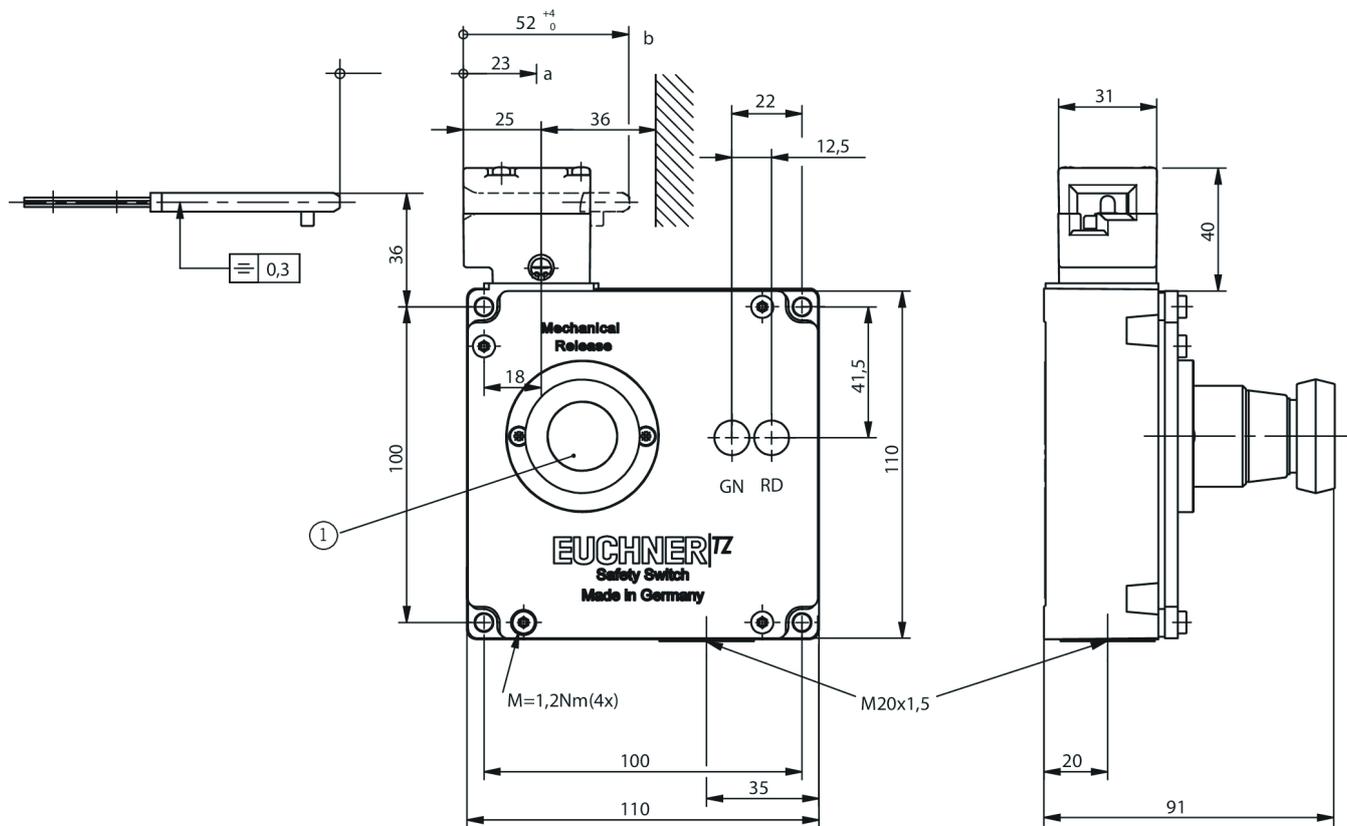

### TZ.R...

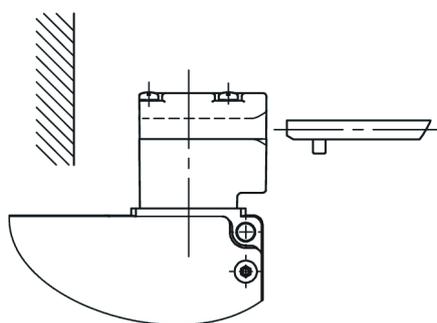

1 Release (blue pushbutton)