


## MGB-L2HEB-PNC-L-163751 (Order no. 163751)

### Locking set MGB-L2...-PN (guard locking by solenoid force) with 4 control elements, push-pull plug, RC12

- ▶ Guard locking with guard lock monitoring
- ▶ Emergency stop according to ISO 13850, illuminated
- ▶ 3 illuminated pushbuttons
- ▶ Push-pull plug
- ▶ including terminal plug for enabling switch (RC12, 12-pin)
- ▶ Pre-assembled on mounting plates
- ▶ With escape release
- ▶ Multicode

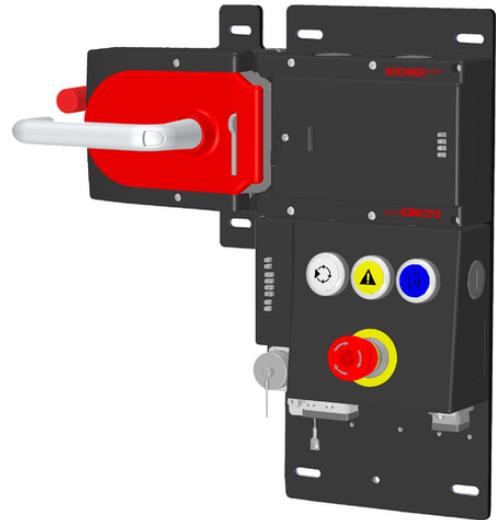

### Profinet connection

Connection via push-pull plugs according to IEC 61076-3-117


### Flexible use as interlocking or guard locking

By means of the corresponding evaluation of the safe device data by the control system, use can be as either interlocking or guard locking (with or without monitoring).

### Emergency stop illuminated

Emergency stop with illumination that can be controlled as required.

### Dimensional drawings

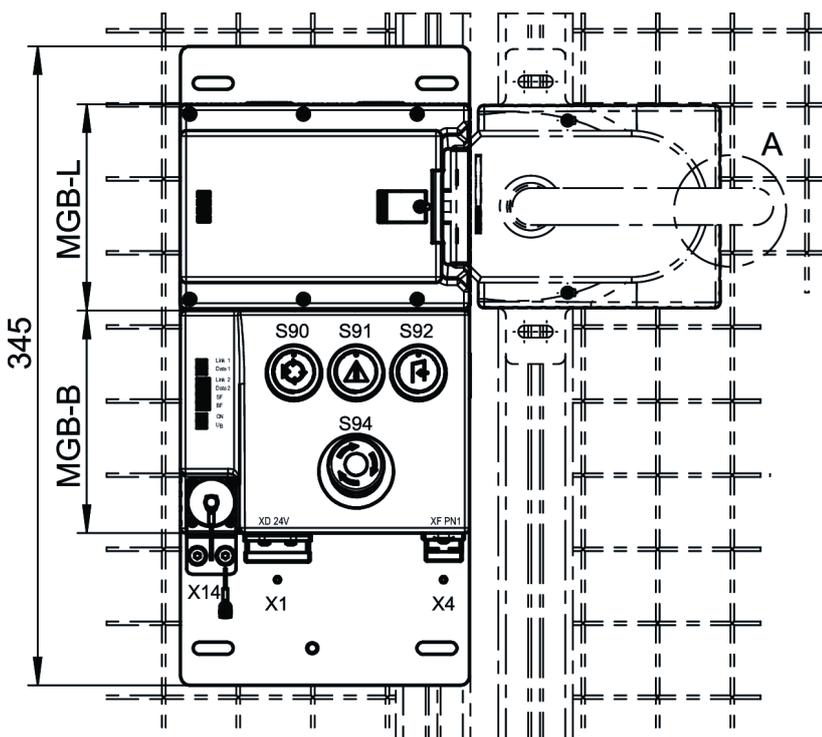

Detail A  
Sperrverriegelung im  
ausgefahrenen Zustand

