


NZ1WO-3131-M (Order no. 089626)

Safety switch NZ.WO, rounded plunger, cable entry M20 x 1.5

- ▶ Rounded plunger
- ▶ Version B according to EN 50041 (hardened)
- ▶ Cable entry M20 x 1.5
- ▶ 2 pos. driven contact
- ▶ 2 NO contacts



Approach direction





Horizontal and vertical
Can be adjusted in 90° steps

Switching element

3131H Slow-action switching contact 2 positively driven contacts $\ominus \rightarrow$ + 2 NO contact

Dimensional drawings

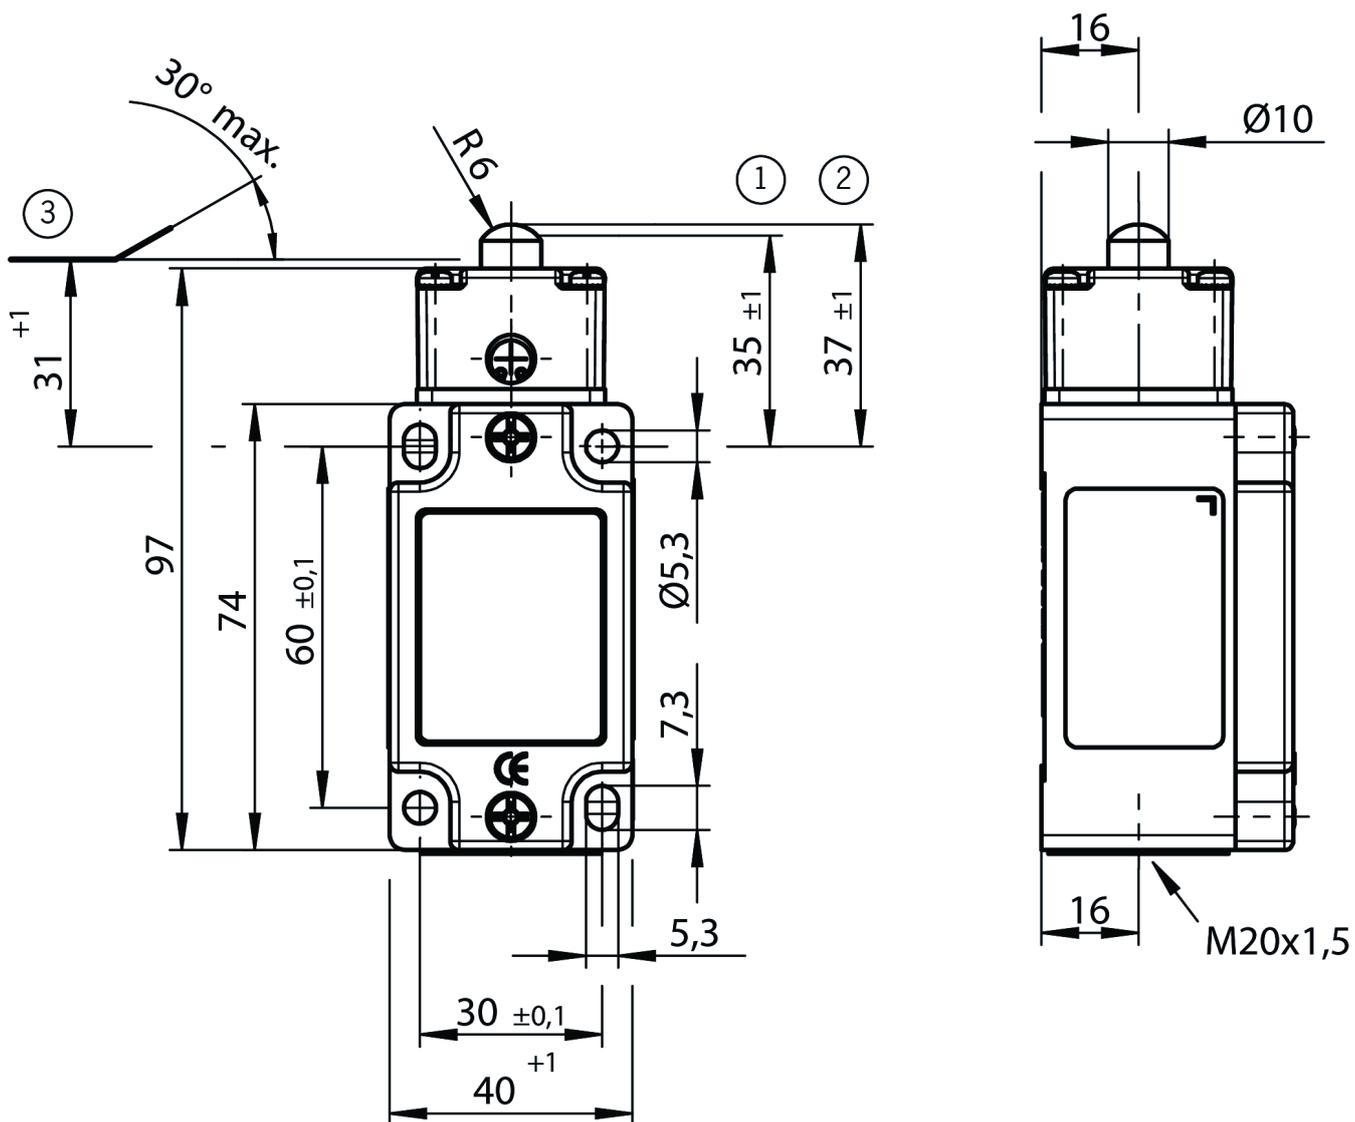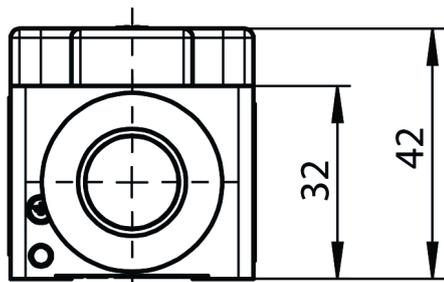

1 Operating point

2 Free position

3 End position

Connection examples

