


BETAETIGER-Z-GME (Order no. 097436)

Actuator for safety switches NZ.VZ, NZ.VZ.VS and TZ

- ▶ Made of solid stainless steel
- ▶ Two stainless-steel safety screws per actuator

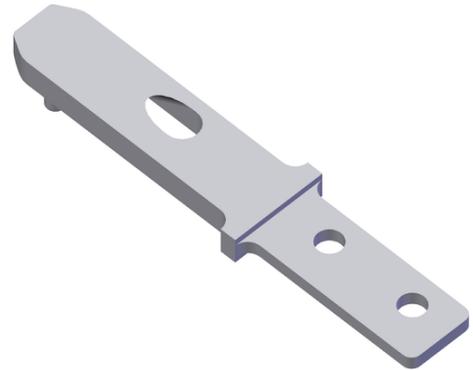


Straight actuator

The straight actuator is used on sliding doors or hinged doors with door radii greater than 1,000 mm. Safety screws prevent unscrewing of the actuators. The safety screws included can be inserted with a normal tool, but cannot be removed again.

Actuator with overtravel

4 mm for doors with normal play

Dimensional drawings

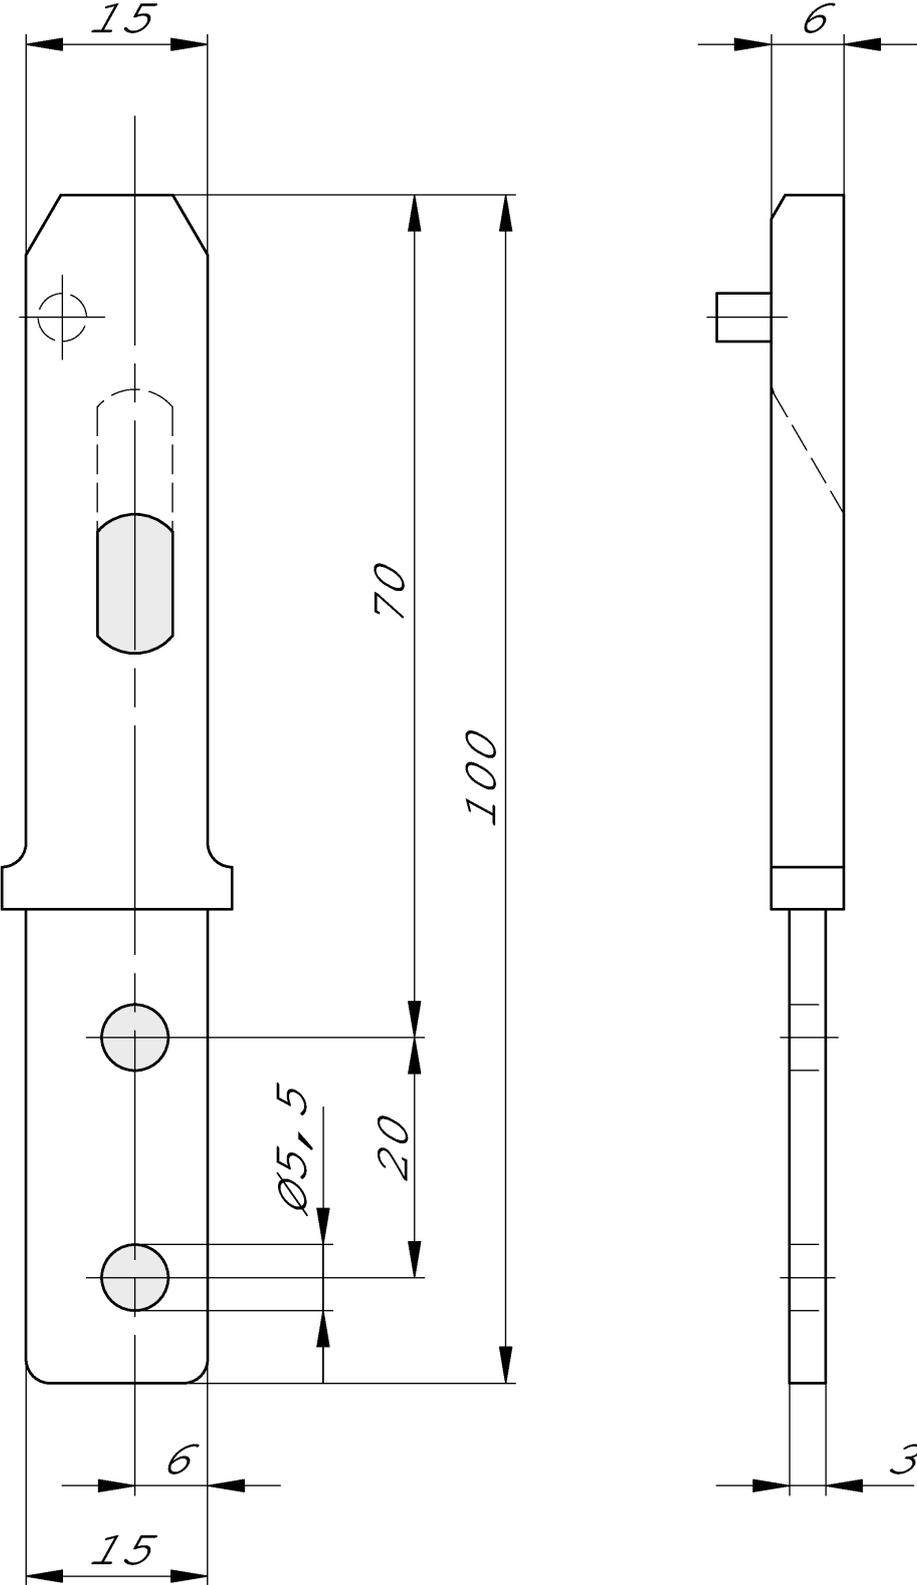

Technical data

Approvals



Mechanical values and environment

Storage temperature	-25 ... 70 °C
---------------------	---------------

Overtravel	max. 4 mm
------------	-----------

Door radius	min. 1000 mm
-------------	--------------

Material

Screw	Stainless steel
-------	-----------------

Actuator	Stainless steel
----------	-----------------

Miscellaneous

Usability of insertion funnel	No
-------------------------------	----