


Project : _____
 Type : _____
 Drawn by : _____
 Catalogue No. : _____
 Date : _____




OPTIONS:

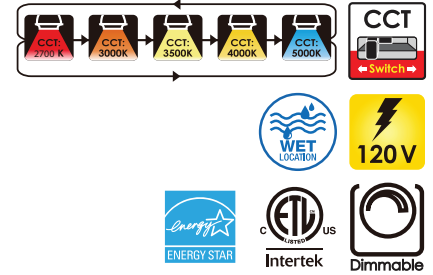

White Trim
(Included already)



Black Trim



Specifications



Model No.		HM05-DL04-9W120-5CCT
General	Watts	9W
	Lumen	700LM
	CCT	2700K/3000K/3500K/4000K/5000K
	Volts	AC120V
	CRI	>80
	Beam Angel	120degree
	Hours Rated	50000 hours
	Min Compartment Size	Length: 4.96 in. Width: 4.96 in. Height: 1.02 in.
Electrical	Operating Frequency	60Hz
	Power Factor	>0.9
	Operating Position	Horizontal&Vertical
	Surge Protection	Built-in surge protection-2.5KV
Physical	Operating Temperature	-20C(-4F) TO 45C(113F)
	Lens Material	Glass
	Housing Color	Black
Additional Information	Weight (Kg)	0.32
	Additional Info	5CCT adjustable
	Rated For Enclosed Fixture	Yes
Compliance	Warranty	5 years
	Safety Listing	cETL-Listed
	Location Rating	Wet
	Energy Star	Yes
	DLC Approved	No
DLC ID	No	

Features & Specifications

Construction	<ul style="list-style-type: none"> • Clear glass lens over LEDs provides a high light efficacy. Standard 120° beam angle • CCT Select switch is placed discretely inside the driver housing • One white trim included • Black & Silver trims are sold separately, no screw required. see accessories table
Mounting	<ul style="list-style-type: none"> • No bracket required, screw the fixture to Junction box directly
Performance Data	<ul style="list-style-type: none"> • Available in 2700K/3000K/3500K/4000K/5000 K selectable color temperature • 80+ CRI • Electrical ratings: 120 V • Estimated life of over 50 000 hours to L70 • Triac dimming driver. Dimming cables included with this luminaire • 2.5kV surge protection (standard) • Operating temperature: -10°C to 40°C (14°F to 104°F)
Compliances	<ul style="list-style-type: none"> • cETL certified for wet locations • IP44 • Meets FCC requirements • Energy Star

Dimensions & Weights

Model	9W
Diameter in.(mm)	4.96 (126)
Height in. (mm)	1.05 (26.6)
Net weight (lbs)	0.7

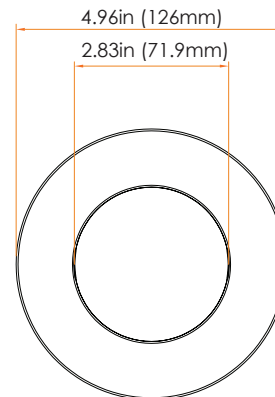

Accessories (Order Separately)

Order Code	Compatible With
Black Trim	HM05-DL04-9W120-5CCT
White Trim(Included already)	HM05-DL04-9W120-5CCT
Retrofit Kit	HM05-DL04-9W120-5CCT



Lumen Details

Model No.:	Watts (W)	2700K		3000K		3500K		4000K		5000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
HM05-DL04-9W120-5CCT	9W	630LM	70	657LM	73	675LM	75	720LM	80	702LM	78

