MGB–L0–ARA–AA1A1–S1–L–111941 (Order no. 111941)
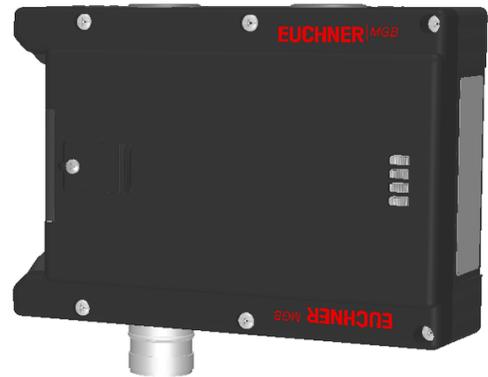
Interlocking module MGB–L0–ARA…, without control or indicator, RC18

▸ Interlocking (without guard locking)

▸ Can be connected in series with other AR devices (e.g. CES–AR and CET–AR)

▸ With plug connector RC18

▸ Unicode

Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.
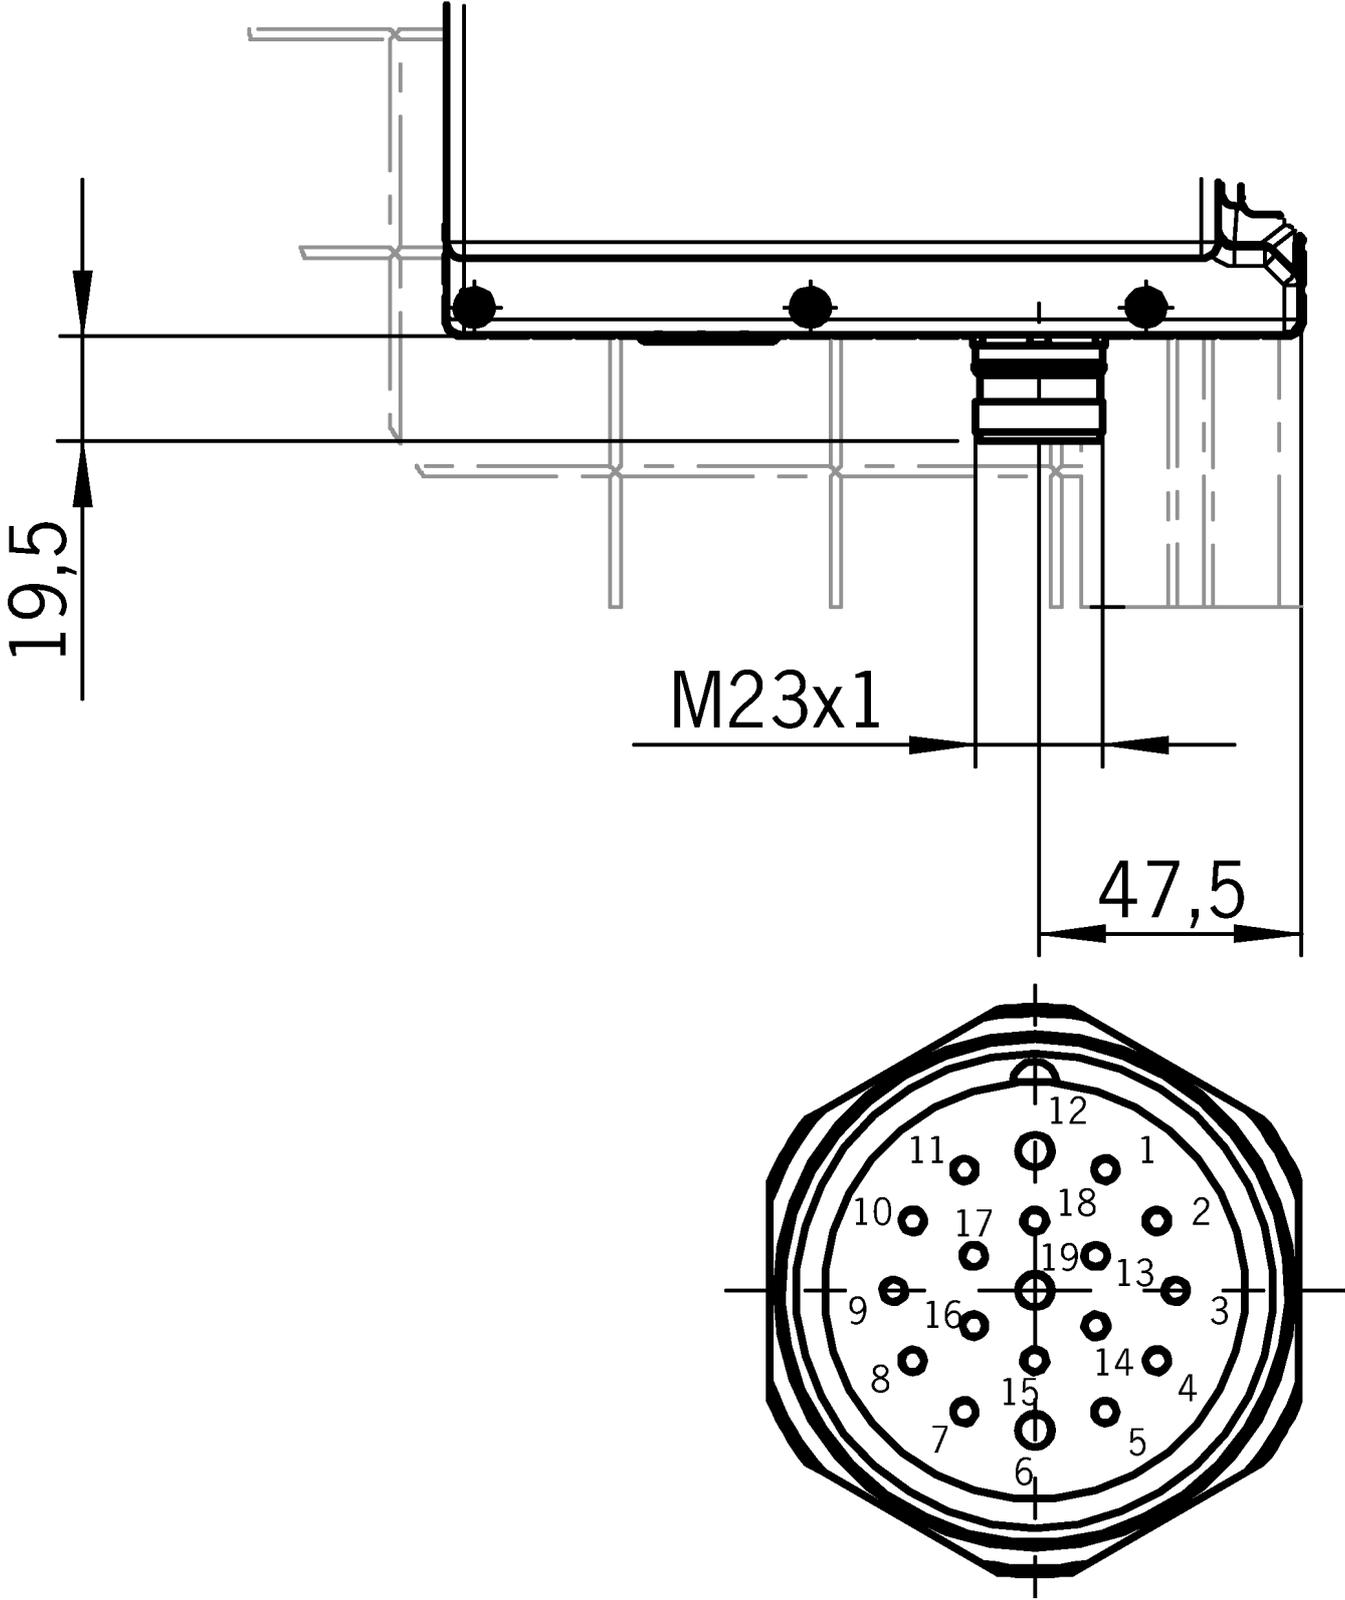
LED indicator

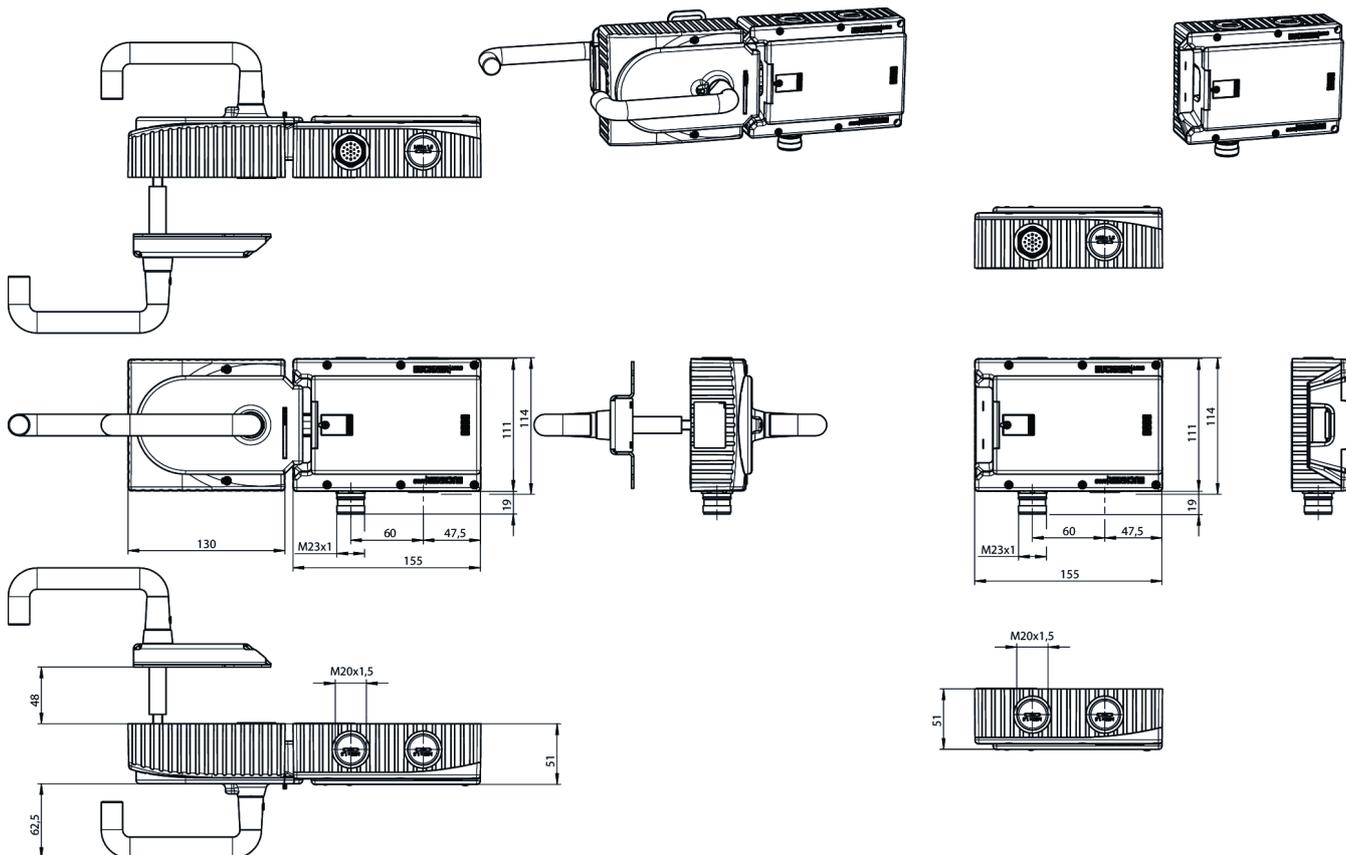The LED indicator indicates all important system and status information.

Monitoring outputs

OT Bolt tongue inserted into the evaluation module

OI Diagnostics; there is a fault

Dimensional drawings

19,5

M23x1

47,5

12
11 1
18
10 17 2
19 13
9 16 3
14
8 4
15
7 5
6

Dimensional drawings

Connection examples

			FI1A	FI1B		RST	NC	NC	NC	NC	NC	NC	NC
UA UB	NC	NC											
6	1	13	2	3		7	10	11	14	15	16	17	18

Safety Inputs

EUCHNER|MGB
111941
MGB-L0-ARA-AA1A1-S1-L
V3

Safety Outputs

Monitoring Outputs

19	12		4	5		8	9
0V	FE		FO1A	FO1B		OT	OI