


NZ1WO-538-M (Order no. 090878)

Safety switch NZ.WO, rounded plunger, cable entry M20 x 1.5

- ▶ Rounded plunger
- ▶ Version B according to EN 50041 (hardened)
- ▶ Cable entry M20 x 1.5
- ▶ 2 pos. driven contact



Approach direction




Horizontal and vertical
Can be adjusted in 90° steps

Switching element

538H Slow-action switching contact 2 positively driven contacts ➞

Dimensional drawings

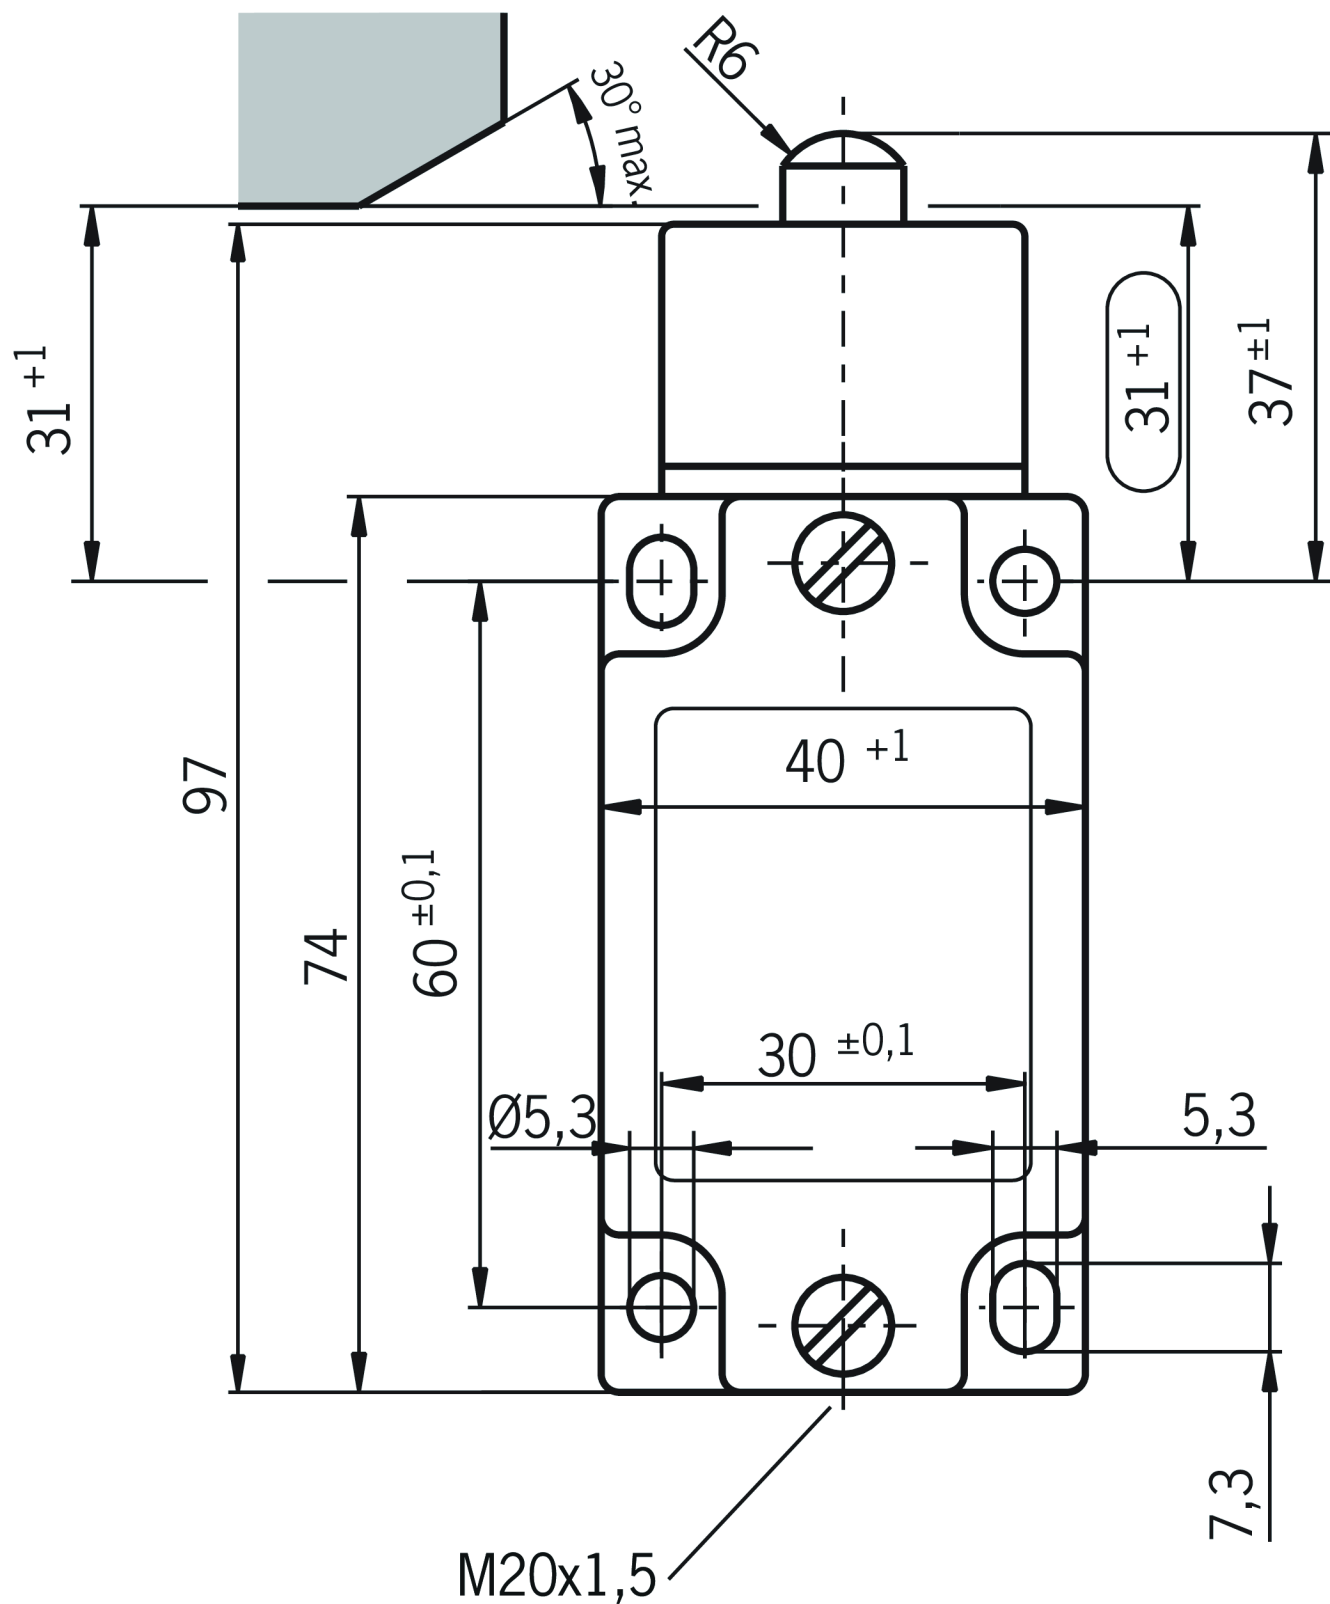

Connection examples

