

Project : _____
 Type : _____
 Drawn by : _____
 Catalogue No. : _____
 Date : _____



E12-CR45LEDA

Specifications

Model No.		□ E12-CR45LEDA
General	Watts	4.5W
	Lumen	450-500LM
	Base	E12
	CCT	3000K/4000K/5000K/6000K
	Volts	AC 120V 50-60Hz
	CRI	>80
	Beam Angel	360 degree
	Hours Rated	25,000 hours
	Product Size	17.5 *54mm
Electrical	IP Grade	IP20
	Power Factor	>0.9
	Storage temperature	-25°C~+65°C
	Operating Temperature	-20°C~+45°C (the best in 25°C)
Physical	Lens Material	Ceramic+PC
	Housing Color	Clear
	Weight (g)	15.2 g
Additional Information	Additional Info	Dimmable
	Warranty	2 years
Compliance	Certification	ETL

Features & Specifications

Performance Data


- Available color temperature in 3000K / 4000K / 5000K / 6000K
- 80+ CRI
- Electrical ratings: AC 120V 50-60Hz
- Estimated life: 25,000 hours
- Dimming capable
- 0.5kV surge protection (standard)
- -20°C~+45°C (the best in 25°C)

Compliances

- ETL
- IP20


Dimensions & Weights

Model	E12-CR45LEDA
Diameter in. (mm)	0.68 (17.5)
Height in. (mm)	2.1 (54)
Net weight (g)	15.2



E12-CR45LEA

Product Details

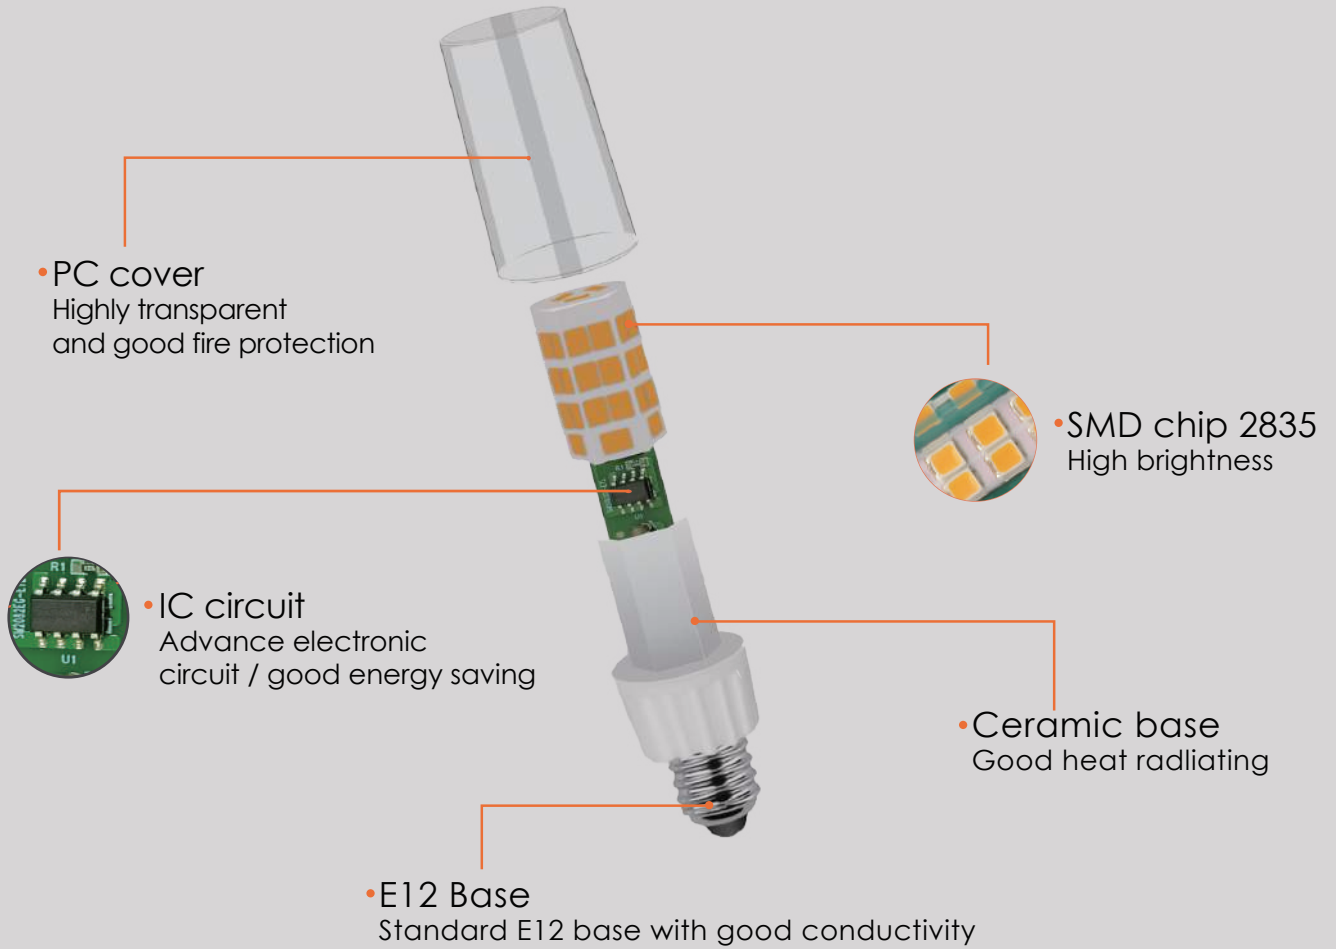

Lumen Details

Model No.:	Watts (W)	3000K / 4000K / 5000K / 6000K							
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
E12-CR45LEDA	4.5W	500LM	110	500LM	110	500LM	110	500LM	110



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

