


## NZ1WO-2131-M (Order no. 089629)

### Safety switch NZ.WO, rounded plunger, cable entry M20 x 1.5

- ▶ Rounded plunger
- ▶ Version B according to EN 50041 (hardened)
- ▶ Cable entry M20 x 1.5
- ▶ 3 pos. driven contact
- ▶ 1 NO contacts



### Approach direction




Horizontal and vertical  
Can be adjusted in 90° steps

### Switching element

2131H Slow-action switching contact 3 positively driven contacts  $\ominus \rightarrow$  + 1 NO contact

## Dimensional drawings

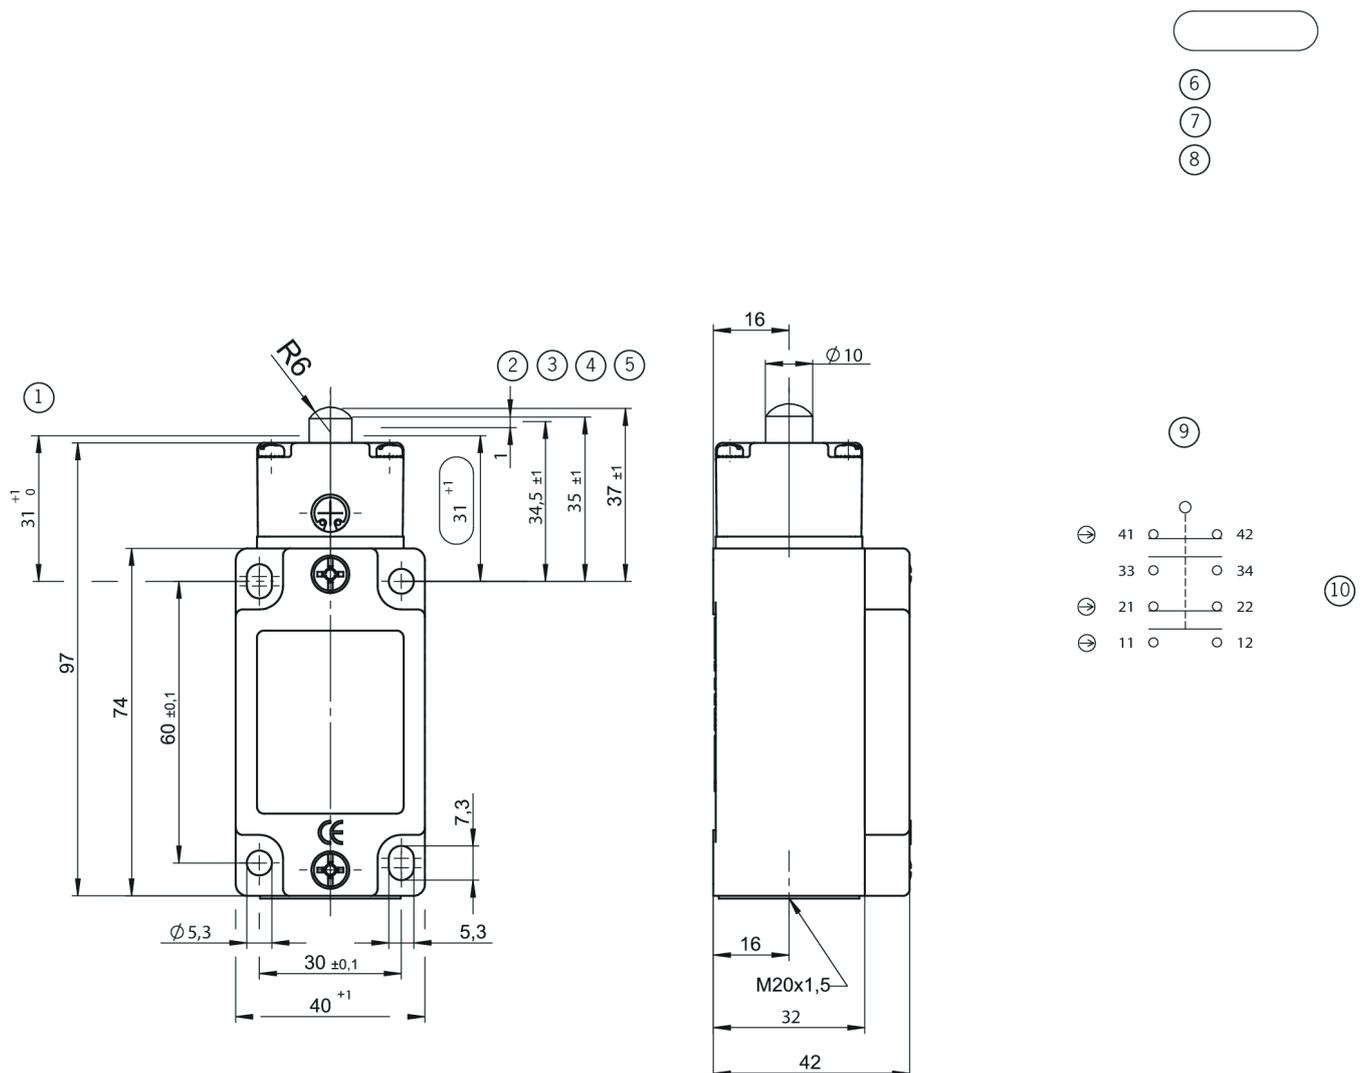

1 End position

10 Switching element SK2131H slow-action contact element 3 NC contacts + 1 NO contact; NC contacts positive opening

2 Operating point NO contact 33-34

3 Operating point NC contact 11-12

4 Operating point NC contact 21-22, 41-42

5 Free position

6 Positive opening function is dependent on maintaining this distance.

7 Actuator (dog) must be positively mounted on the machine.

8 Switch can be replaced only with the same type.

9 Switching element in free position

Connection examples

