


**TP4-2131A024L024SM8C2200 (Order no. 100620)**

## Technical data

### Approvals

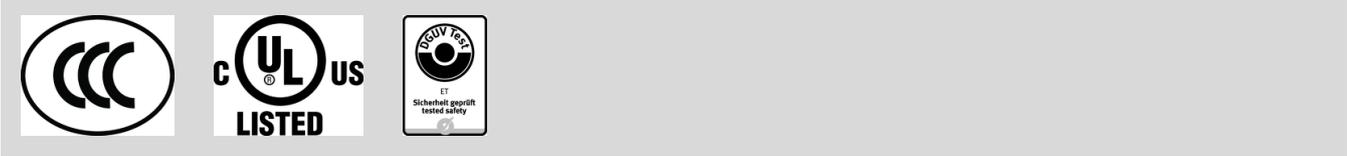

### Electrical connection values

Fuse	max. 1 A gG	
Power consumption	8 W	
Display module	24 V -15% ... +10%	
Rated insulation voltage $U_i$	30 V	
Rated impulse voltage $U_{imp}$	1.5 kV	
Utilization category		
	DC-13	1 A 24 V
	AC-15	1 A 24 V
Solenoid operating voltage		
	AC/DC	24 V -15% ... +10%
Solenoid duty cycle	100 %	
Switching voltage		
	min. at 10 mA	12 V
Switching current		
	min. at 24 V	1 mA
thermal rated current $I_{th}$	1 A	

### Mechanical values and environment

Anfahrgeschwindigkeit	max. 20 m/min	
Connection type		
	1 x	Plug connector M12 (8-pin)
Number of door position NC contacts	1	
Number of guard lock monitoring NO contacts	1	
Number of guard lock monitoring positively driven contacts	2	

Extraction force	20 N
Actuation frequency	max. 1200 1/h
Actuating force	10 N
Installation orientation	any
Storage temperature	-25 ... 70 °C
Mechanical life	1 x 10 <sup>6</sup>
Retention force	10 N
Switching principle	Slow-action switching contact
Degree of protection	IP67
Ambient temperature	-20 ... 55 °C
Material	
	Housing Reinforced thermoplastic
	Contact Silver alloy, gold flashed
Locking force F <sub>max</sub>	1300 N
Locking force F <sub>Zh</sub>	1000 N
Guard locking principle	Open-circuit current principle

### Characteristic values according to EN ISO 13849-1 and EN IEC 62061

	B10 <sub>D</sub>	Mission time
Guard lock monitoring	3x10 <sup>6</sup>	20 y
	Important! Values valid at DC-13 100 mA/24V	

### Miscellaneous

C number	C2200 Customer-specific wiring
----------	--------------------------------

### In combination with actuator ACTUATOR-P-GNT

Horizontal overtravel	7 mm
-----------------------	------

### In combination with actuator ACTUATOR-P-GT

Horizontal overtravel	2 mm
Vertical overtravel	1.5 mm