


Project : _____
 Type : _____
 Drawn by : _____
 Catalogue No. : _____
 Date : _____

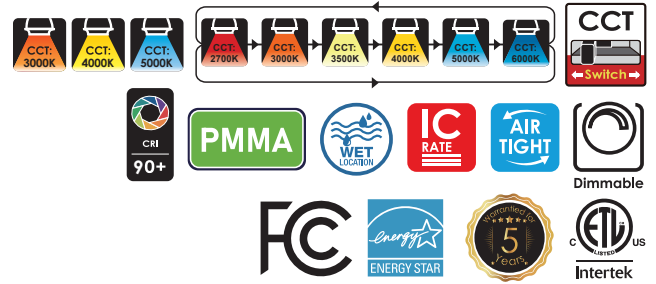

Specifications


Model No.	<input type="checkbox"/> VO-RP4W9-120-D-6WAY/WH	<input type="checkbox"/> VO-RP4W9-120-D-6WAY/BK	<input type="checkbox"/> VO-RP4W9-120-30-D	<input type="checkbox"/> VO-RP4W9-120-40-D	<input type="checkbox"/> VO-RP4W9-120-50-D	
General	Watts	9W	9W	9W	9W	9W
	HID Equivalent	50W	50W	50W	50W	50W
	Lumen	750Lm	750Lm	750Lm	750Lm	750Lm
	CCT	27K/30K/35K/40K/50K/60K	27K/30K/35K/40K/50K/60K	3000K	4000K	5000K
	Volts	120V	120V	120V	120V	120V
	CRI	>90	>90	>90	>90	>90
	Beam Angel	120°	120°	120°	120°	120°
	Hours Rated	50000 hours	50000 hours	50000 hours	50000 hours	50000 hours
	Min Compartment Size	Ø4.9"x0.9"	Ø4.9"x0.9"	Ø4.9"x0.9"	Ø4.9"x0.9"	Ø4.9"x0.9"
	Operating Frequency	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz
Electrical	Power Factor	>0.9	>0.9	>0.9	>0.9	>0.9
	Lighting type	Edge-lit	Edge-lit	Edge-lit	Edge-lit	Edge-lit
	Driver type	Flicker free, isolated	Flicker free, isolated	Flicker free, isolated	Flicker free, isolated	Flicker free, isolated
	Operating Temp.	-4°F to 104°F	-4°F to 104°F	-4°F to 104°F	-4°F to 104°F	-4°F to 104°F
Physical	Lamp body	ADC12	ADC12	ADC12	ADC12	ADC12
	LGP	PMMA	PMMA	PMMA	PMMA	PMMA
	Lens Material	Plastic	Plastic	Plastic	Plastic	Plastic
	Housing Color	White	White	White	White	White
Additional Information	Weight (Kg)	0.28	0.28	0.28	0.28	0.28
	Additional Info	6 way CCT	6 way CCT	Single CCT	Single CCT	Single CCT
	Dimming	Yes	Yes	Yes	Yes	Yes
	Warranty	5 years	5 years	5 years	5 years	5 years
	Safety Listing	CETLus-Listed	CETLus-Listed	CETLus-Listed	CETLus-Listed	CETLus-Listed
Compliance	Location Rating	Wet	Wet	Wet	Wet	Wet
	Energy Star	YES	YES	YES	YES	YES
	DLC Approved	No	No	No	No	No
	DLC ID	No	No	No	No	No

Features & Specifications

Construction	<ul style="list-style-type: none"> • Construction: Aluminum with frosted lens • Edgelite provide uniform illumination • High lighting efficiency • CCT switches are placed discretely inside the driver housing
Mounting	<ul style="list-style-type: none"> • Easy installation and fast connection
Performance Data	<ul style="list-style-type: none"> • Available in 2700k/3000k/3500k/4000k/5000k/6000k switchable color temperature, Or single CCT 3000K/4000K/5000K • 90+ CRI • Electrical ratings: 120v/50-60Hz • Estimated life of over 100 000 hours to L70 • ELV&TRIAC Dimming • Isolated driver, flicker free • Operating temperature: -20°C /-4°F to 40°C/104°F
Compliances	<ul style="list-style-type: none"> • ETL certified for wet locations • ES listed

Dimensions & Weights

Model	MG-RP4W9	VO-RP4W9
Diameter in.(cm)		4.92in (12.5)
Height in. (cm)		0.90in (2.2)
Net weight (lbs)		0.617

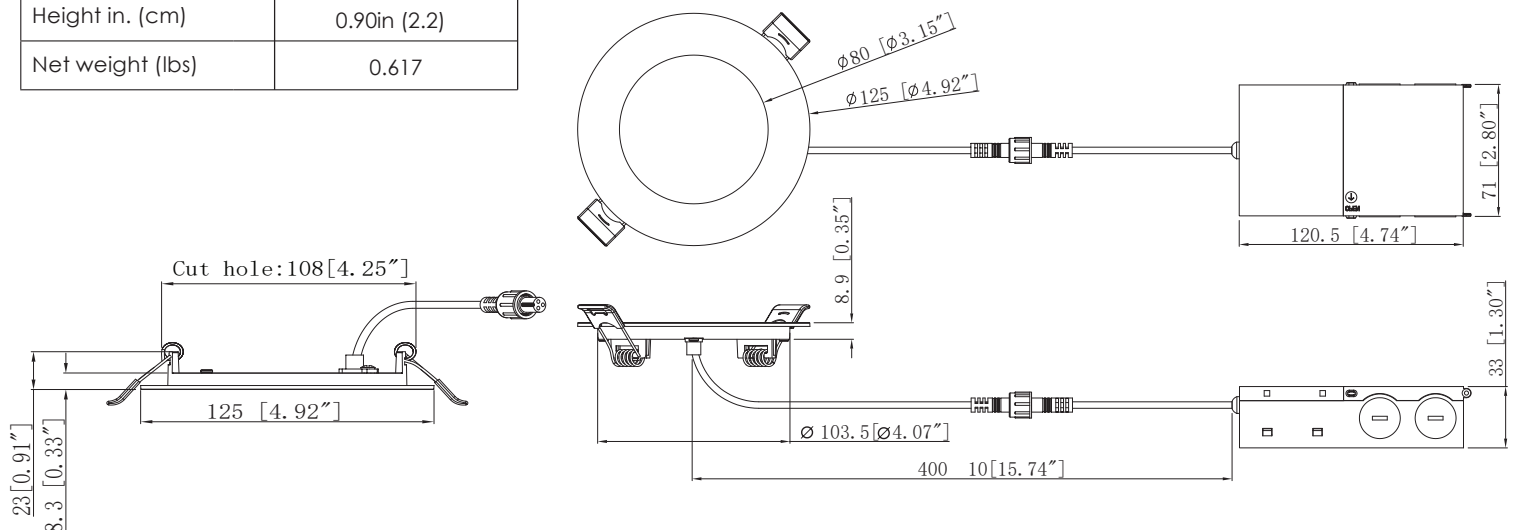

Product Details

