


STP1A-528A024RC18EXT1 (Order no. 106767)

Safety switch STP, plug connector RC18, without door monitoring contact, pushbutton and signal indicator

- ▶ Actuating head made of metal
- ▶ Auxiliary release on the front
- ▶ Pushbutton (black) and signal indicator (green)
- ▶ Without door monitoring contact



Approach direction



Horizontal and vertical
Can be adjusted in 90° steps

Solenoid operating voltage

- ▶ AC/DC 24 V +10%, -15%

Signal indicator

A signal indicator (1 LED, green) is available for the following voltage ranges:

- ▶ DC 24 V +10%, -15%

Pushbuttons

- ▶ Black push button

Guard locking type

STP1 Closed-circuit current principle, guard locking by spring force. Release by applying voltage to the guard locking solenoid.


Switching element

528 Slow-action switching contact 1 NC \ominus + 1 NO


Auxiliary release

This is used for releasing the guard locking with the aid of a tool. To protect against tampering, the auxiliary release is sealed with sealing lacquer.

Functional drawings

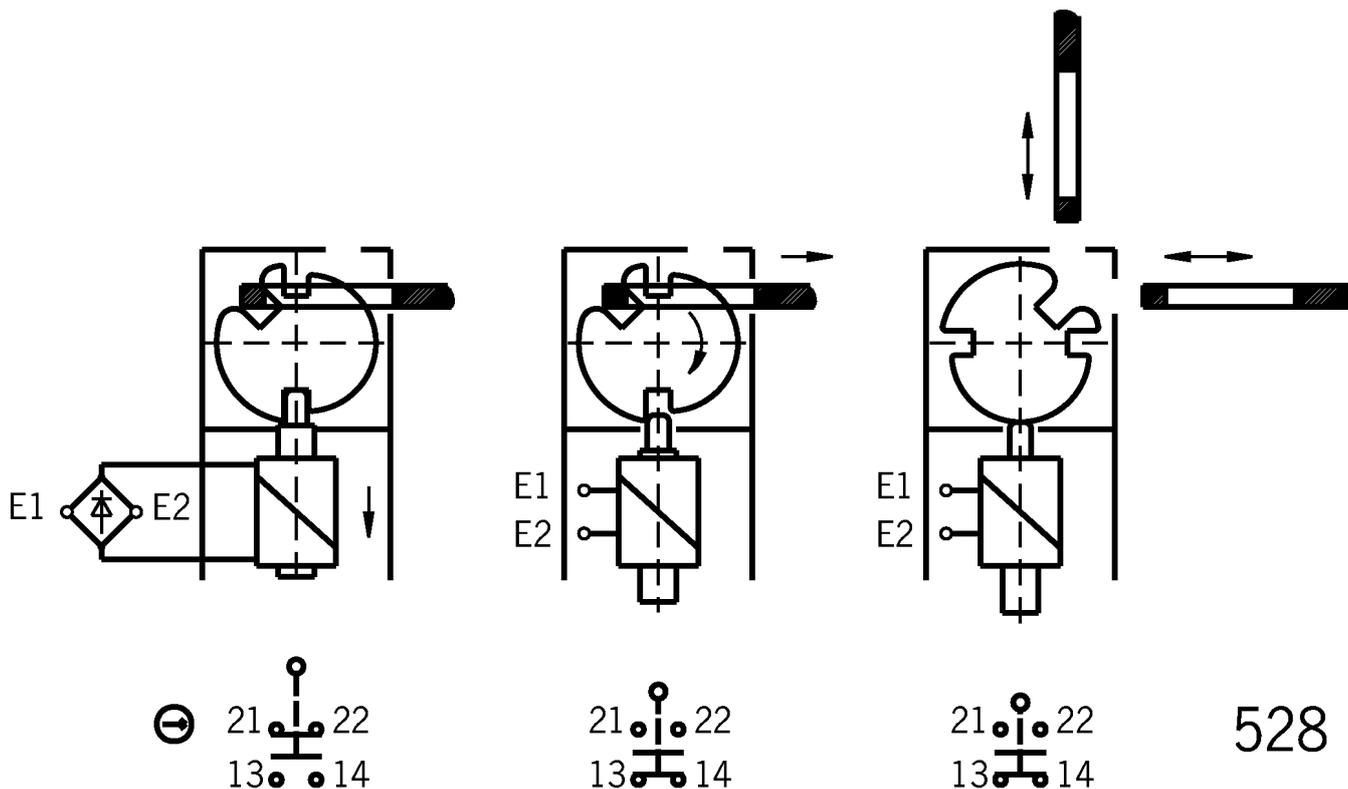

Dimensional drawings

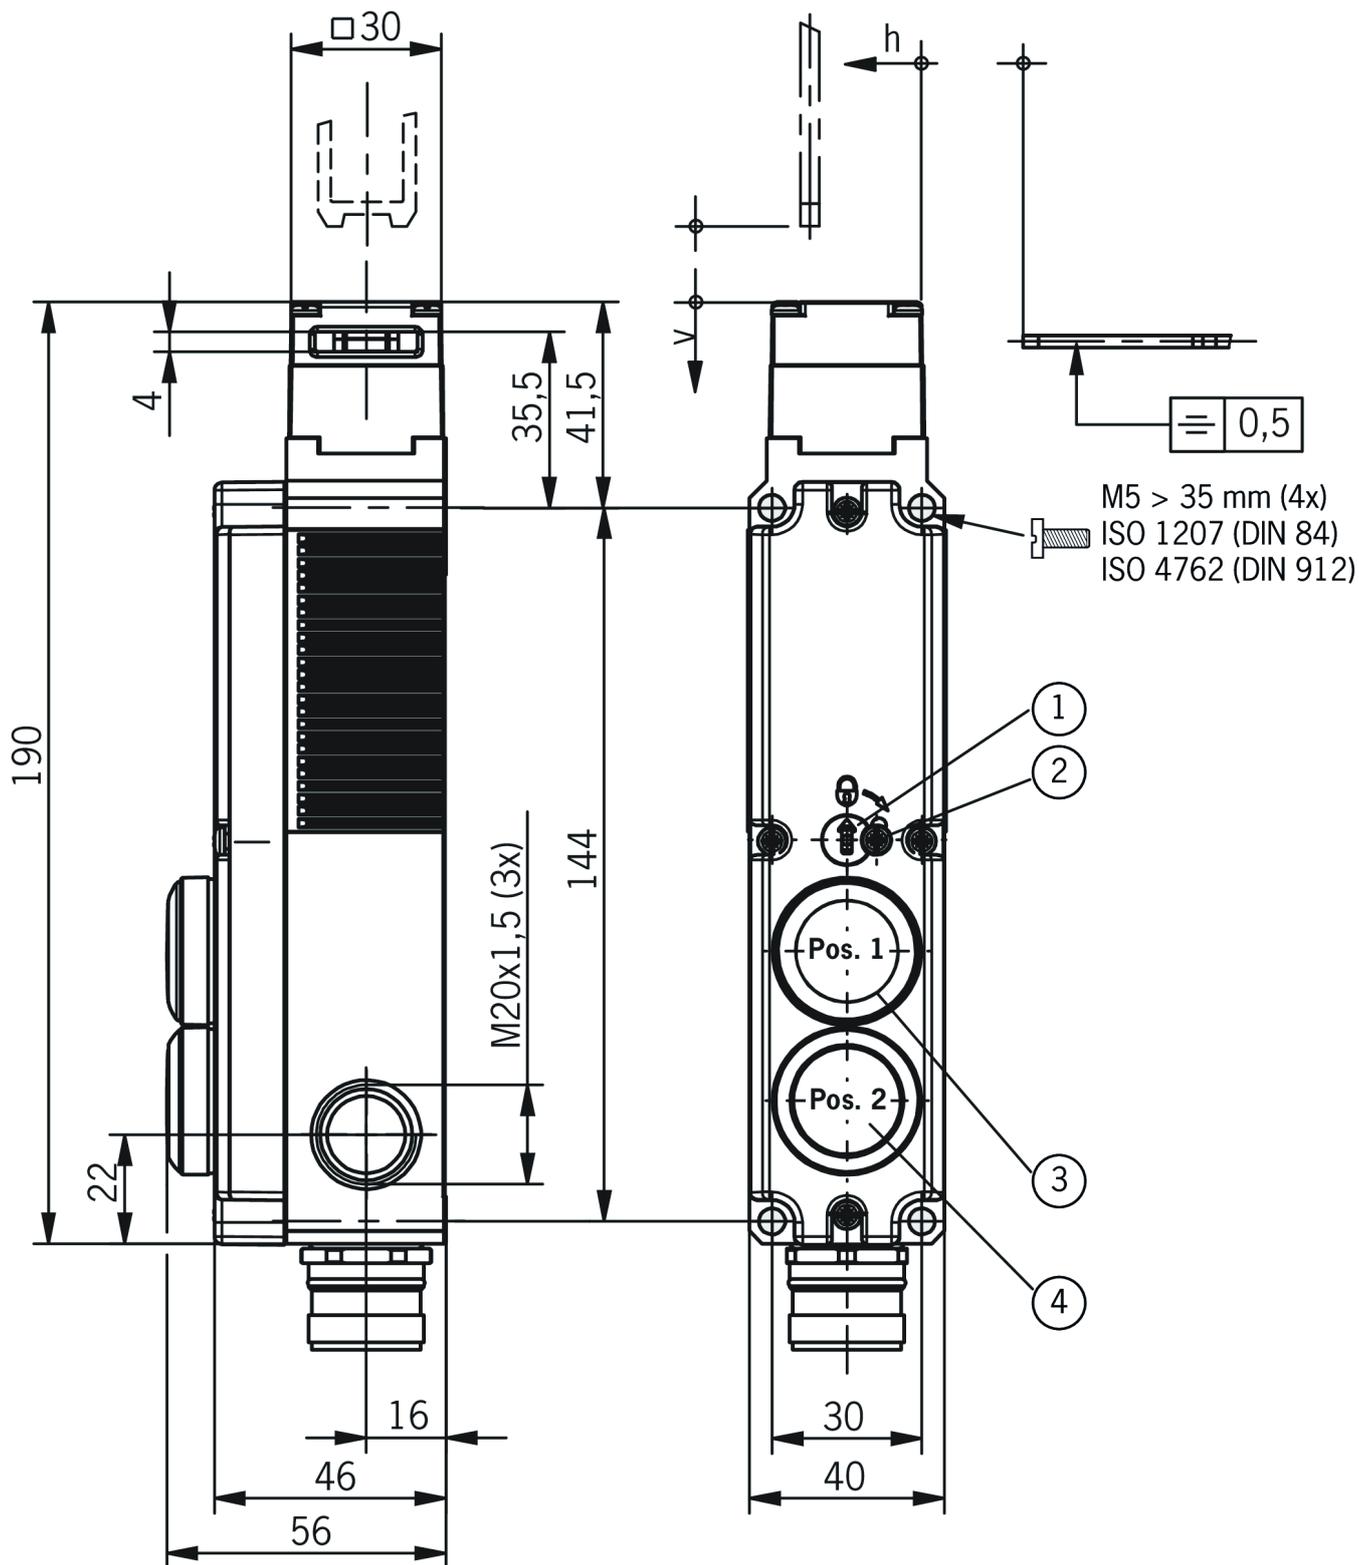

- 1 Auxiliary release
- 2 Locking screw
- 3 Signal indicator, green
- 4 Black push button