

BETAETIGER-Z-G/V25 (Order no. 074411)

Actuator for safety switches NZ.VZ, NZ.VZ.VS and TZ

- ▶ Two stainless-steel safety screws per actuator
- ▶ Packaging unit 25 pieces




Straight actuator

The straight actuator is used on sliding doors or hinged doors with door radii greater than 1,000 mm. Safety screws prevent unscrewing of the actuators. The safety screws included can be inserted with a normal tool, but cannot be removed again.

Actuator with overtravel

4 mm for doors with normal play

Dimensional drawings

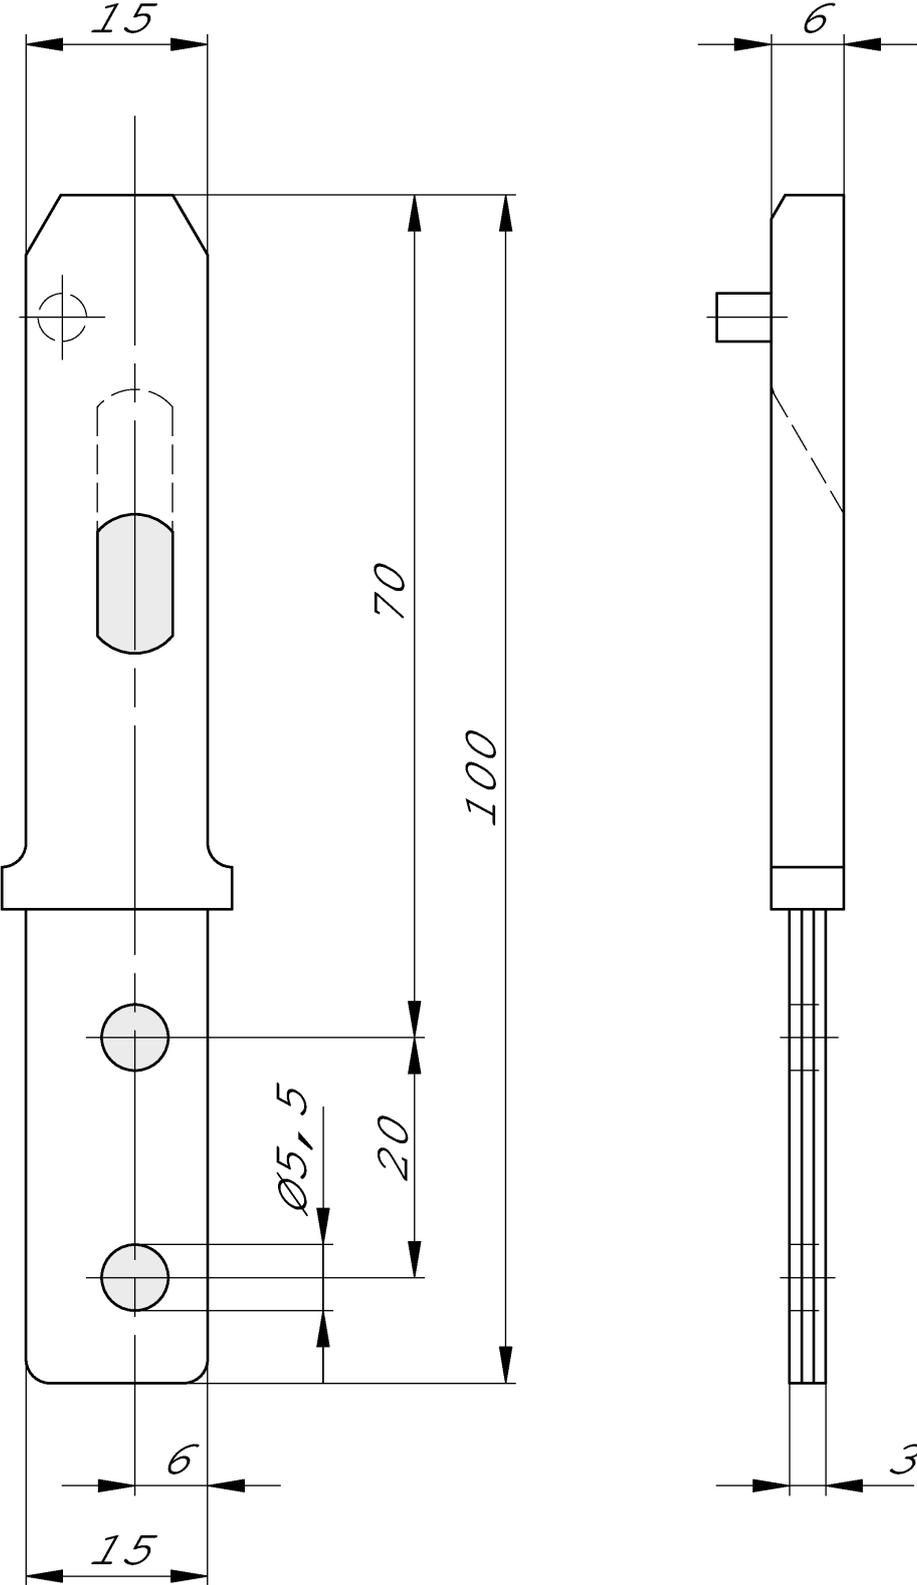

Technical data

Mechanical values and environment

Storage temperature	-25 ... 70 °C
Overtravel	max. 4 mm
Door radius	min. 1000 mm
Material	
Screw	Stainless steel
Actuator	Galvanized steel
Sheath	Plastic

Miscellaneous

Usability of insertion funnel	No
-------------------------------	----