


BETAETIGER-P-G (Order no. 059226)

Actuators for safety switches NP/GP/TP

- ▶ Actuator made of stainless steel
- ▶ Two stainless-steel safety screws per actuator

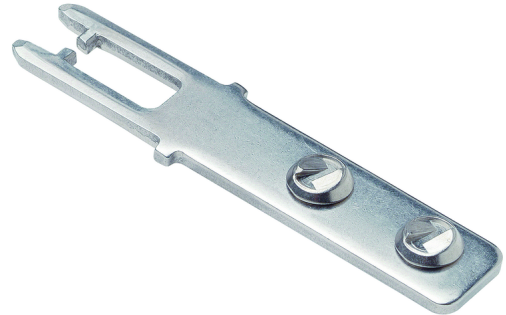


Straight actuator

The straight actuator is used on sliding doors or hinged doors with door radii greater than 1,000 mm. Safety screws prevent unscrewing of the actuators.

Screws made of stainless steel

The safety screws included can be inserted with a normal tool, but cannot be removed again.

Dimensional drawings

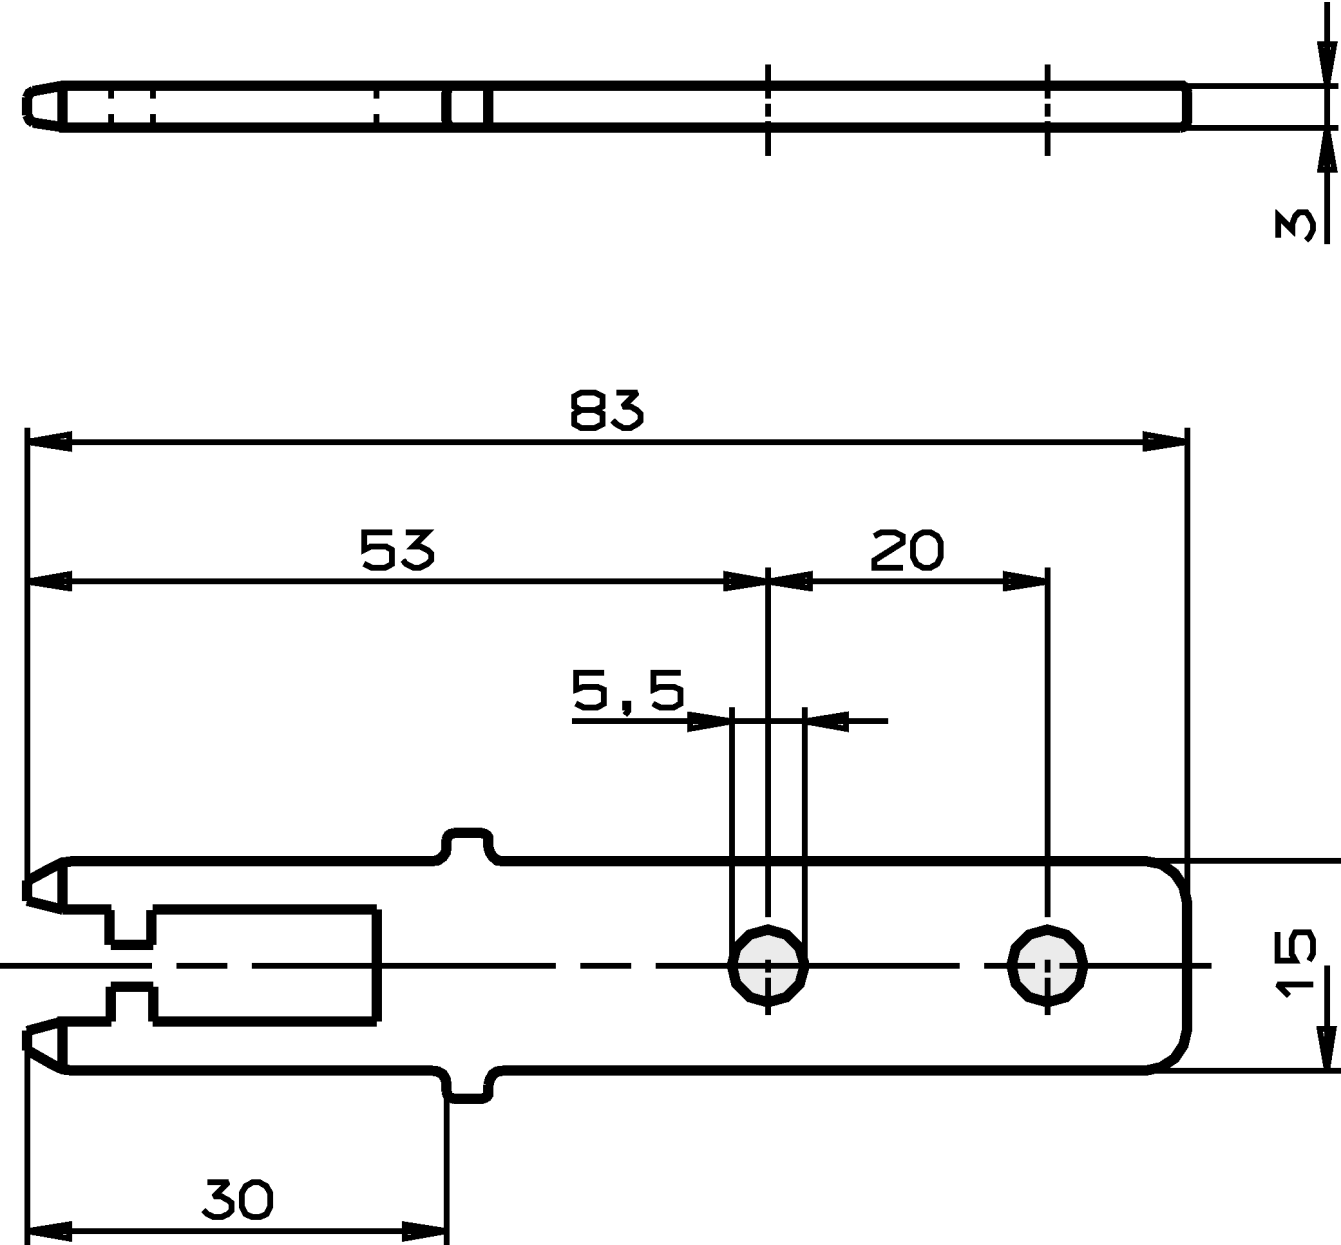

Technical data

Mechanical values and environment

Storage temperature	-25 ... 70 °C		
Overtravel	max. 2 mm		
Door radius	min. 1000 mm		
Material			
	Actuator	Stainless steel	
	Screw	Stainless steel	

Miscellaneous

Usability of insertion funnel	No		
-------------------------------	----	--	--