




Project :
Type :
Drawn by :
Catalogue No. :
Date :



VO-A19W10-120

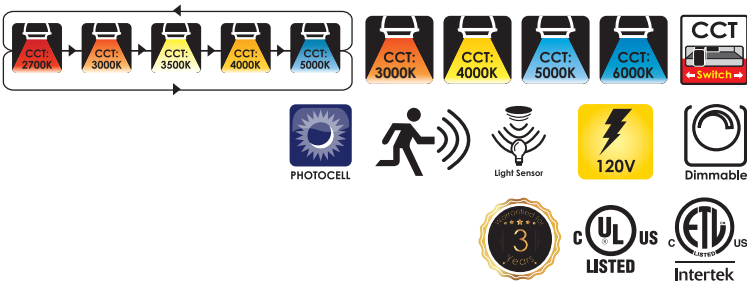

VO-A19W10-120-5Way-S-D



VO-A19W10-120-5Way-D-PIR

Specifications

Model No.		☐ VO-A19W10-120	☐ VO-A19W10-120-5Way-S-D	☐ VO-A19W10-120-5Way-D-PIR
General	Watts	☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K	2700K/3000K/3500K/4000K/5000K Adjustable	2700K/3000K/3500K/4000K/5000K Adjustable
	Lumen	10W	10W	10W
	Base	800Lm	800Lm	800Lm
	CCT	E26	E26	E26
	Volts	120V	120V	120V
	CRI	>80	>80	>80
	Beam Angel	180°	180°	180°
	Hours Rated	25,000Hrs	25,000Hrs	25,000Hrs
Electrical	Product Size	4.09"(H) x2.36"(Φ)	4.63"(H) x2.36"(Φ)	4.92"(H) x2.36"(Φ)
	IP Grade	IP20	IP20	IP20
	Power Factor	>0.7	>0.7	>0.7
	Storage temperature	-25°C ~ 40°C	-25°C ~ 40°C	-25°C ~ 40°C
Physical	Operating Temperature	-25°C ~ 40°C	-25°C ~ 40°C	-25°C ~ 40°C
	Lens Material	PC	PC	PC
	Bulb Head Color	Milky	Milky	Milky
Additional Information	Weight (g)	41	50	52
	Additional Info	Dimmable	Dimmable	NO Dimmable
	Warranty	3Years	3Years	3Years
Compliance	Certification	cUL	ETL	ETL




Features & Specifications


Performance Data	• Available color temperature 3000K/4000K/5000K/6000K and 2700K/3000K/3500K/4000K/5000K Adj . • 80+ CRI • Electrical ratings : AC 120V 50-60Hz • Estimated life: 25,000 hours • Dimming Capable • 0.5kV surge protection (standard) • -20°C~+45°C (the best in 25°C)
Compliances	• cUL/ETL • IP20

Dimensions & Weights


Model	VO-A19W10-120	VO-A19W10-120-5Way-S-D	VO-A19W10-120-5Way-D-PIR
Diameter in. (mm)	2.36(60)	2.36(60)	2.37(60)
Height in. (mm)	4.09(104)	4.63(118)	4.92(125)
Net weight (g)	41	50	52



VO-A19W10-120




VO-A19W10-120-5Way-S-D



VO-A19W10-120-5Way-D-PIR



Product Details

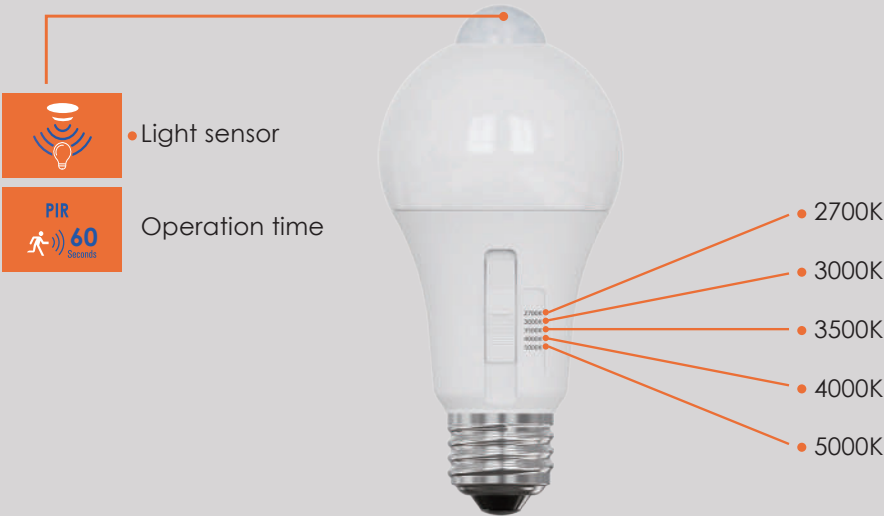

PIR Sensor

Part Number	Position	Technology	Frequency	Height(Ft)	Volt(V)	IP rating	Temperature (°C)
PIR Sensor	Internal	Pyroelectric Infrared Sensor (PIR)	60Hz	4.92Ft	AC 120v	IP20	20°C~+45°C

DEAFULT SETTING:
Hold Time: 60S
Detection Distance: 4.92Ft
Daylight Threshold: Disable

Lumen Details

Model No.:	Watts (W)	2700K		3000K		3500K		4000K		5000K		6000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
VO-A19W10-120	10W	—	—	870	100	—	—	920	104	930	105	920	104
VO-A19W10-120-5Way-S-D	10W	830	95	880	102	930	110	940	111	910	103	—	—
VO-A19W10-120-5Way-D-PIR	10W	801	80	830	84	897	92	939	85	934	96	—	—



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

