MGB-L1HE-ARA-R-121227 (Order no. 121227)

Locking set MGB-L1HE-ARA... (guard locking by spring force) with 1 pushbutton, key-operated rotary switch, emergency stop

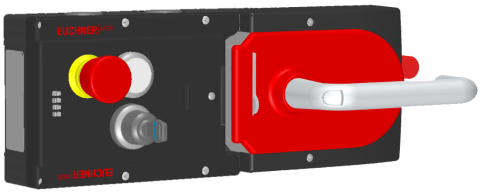

- Guard locking with guard lock monitoring
- Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- Emergency stop according to ISO 13850
- 1 pushbuttons (illuminated)
- With lens set, 6 pcs.
- Key-operated rotary switch (form V, 40°)
- With cable entry
- With escape release
- Unicode
- Degree of protection IP54

Guard locking type

MGB-L1...	The locking arm is held in the locked position by spring force and is unlocked by solenoid force (closed-circuit current principle, mechanically locked).

Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

LED indicator

The LED indicator indicates all important system and status information.

Monitoring outputs

OD	ON when the door is closed
OT	Bolt tongue inserted into the evaluation module
OL	Guard locking solenoid in locked position
OI	Diagnostics; there is a fault

Emergency stop device

S1	2 positively driven contacts and 1 NO contact (e.g. monitoring contact), emergency stop with turn-to-reset, not illuminated

Pushbuttons

S2	1 NO contact, illuminated

Lens set

The color of the pushbuttons can be selected using the color cover set included (5 colors). Item no.: 120344 (see Accessories)

Key-operated rotary switch

S3 Key-operated switch with 2 positions (form V, 40°). The switch latches in position 0. The key can be pulled out in this position.

Escape release

The escape release enables people accidentally shut in to open the guard locked door from the danger zone.