


MGB-L2H-APA-L-115674 (Order no. 115674)

Locking set MGB-L2H-APA... (guard locking by solenoid force) with 3 pushbuttons, emergency stop, RC18

- ▶ Guard locking with guard lock monitoring
- ▶ Emergency stop according to ISO 13850
- ▶ 3 pushbuttons, illuminated and printed (gn, wh, wh)
- ▶ With plug connector RC18
- ▶ Unicode
- ▶ Common monitoring output for diagnostics and emergency stop

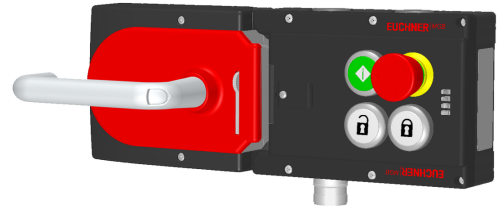

Guard locking type

MGB- The locking arm is held in the locked position by solenoid force and is unlocked by spring force
L2... when the solenoid is switched off (open-circuit current principle, electrically locked).

Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

LED indicator

The LED indicator indicates all important system and status information.

Monitoring outputs

- OT Bolt tongue inserted into the evaluation module
- OI Diagnostics; there is a fault

Emergency stop device

S1 2 positively driven contacts and 1 NO contact (e.g. monitoring contact), emergency stop with turn-to-reset, not illuminated

Pushbuttons

- S2 1 NO contact, illuminated and printed
- S3 1 NO contact, illuminated and printed
- S4 1 NO contact, illuminated and printed