

CIT3PL1N30–STA (Order no. 071552)

Read-only head CIT3 with parallel interface, plugged in axially

- ▶ Parallel interface
- ▶ Cylindrical design M30
- ▶ M12 plug connector
- ▶ Axial connection




Mounting instructions

On mounting the read head and data carrier, it is to be ensured the crossing direction as per the direction of the arrow on the active face of the read head is observed.

Attention:

On the use of a screened cable the connecting cable is allowed to be max. 50 m long.

Dimensional drawings

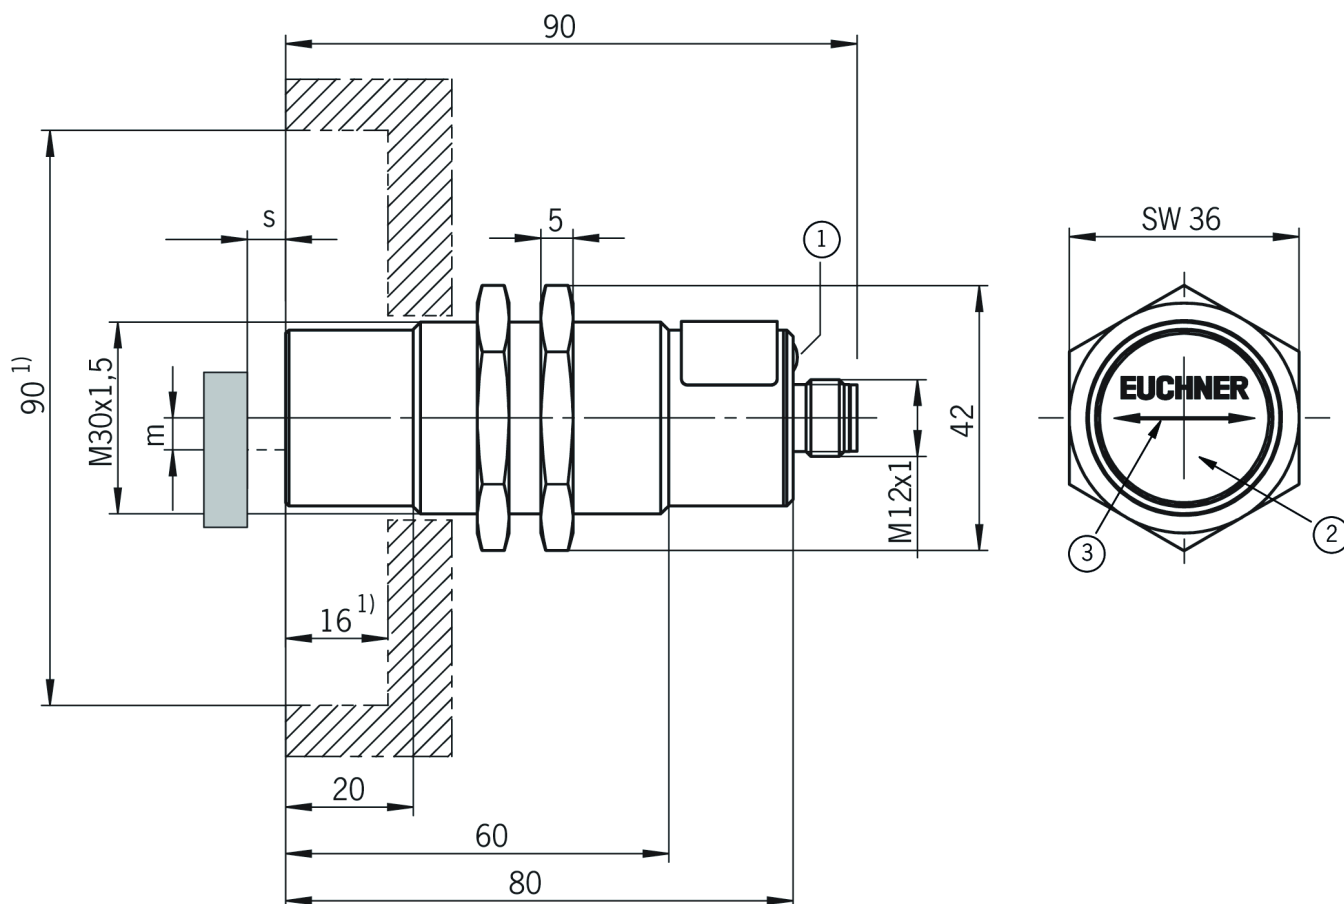

1 LED

1) Clear zone

2 Active face


3 Crossing direction

m Center offset

s Read distance

Connection examples

Pin	Bezeichnung	Beschreibung	Aderfarbe
1	0V/GND	Masse, DC 0 V	WH
2	24 V/U _B	Spannungsversorgung, DC 24 V	BN
3	A	Ausgang Datenleitung A	GN
4	B	Ausgang Datenleitung B	YE
5	C	Ausgang Datenleitung C	GY
6	D	Ausgang Datenleitung D	PK
7	SKIP	Eingang Datentakt	BU
8	STROBE	Ausgang Datenträger aktiv	RD
-		Schirm	offen

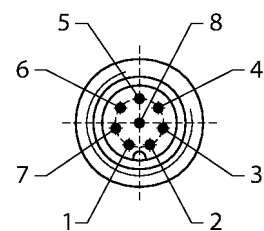

Ansicht auf Steckseite des Lesekopfs

Der Schirm der Anschlussleitung ist über die Rändelmutter des M12-Steckverbinders mit dem Gehäuse des Lesekopfs verbunden.

