


## **MGB-L2-ARA-AM3A1-M-L-121263 (Order no. 121263)**

### **Locking module MGB-L2-ARA... (guard locking by solenoid force) with 2 pushbuttons, emergency stop, incl. label carrier**

- ▶ Guard locking with guard lock monitoring
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ Emergency stop according to ISO 13850
- ▶ 2 pushbuttons (illuminated)
- ▶ With lens set, 6 pcs.
- ▶ incl. adhesive labels
- ▶ With cable entry
- ▶ Unicode

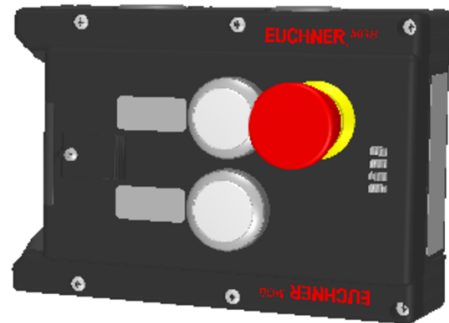

### **Guard locking type**

MGB- The locking arm is held in the locked position by solenoid force and is unlocked by spring force  
L2... when the solenoid is switched off (open-circuit current principle, electrically locked).

### **Door hinge**

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

### **LED indicator**

The LED indicator indicates all important system and status information.

### **Monitoring outputs**

- OD ON when the door is closed
- OT Bolt tongue inserted into the evaluation module
- OL Guard locking solenoid in locked position
- OI Diagnostics; there is a fault

### **Emergency stop device**

- S1 2 positively driven contacts and 1 NO contact (e.g. monitoring contact), emergency stop with turn-to-reset, not illuminated

### **Pushbuttons**

- S2 1 NO contact, illuminated
- S3 1 NO contact, illuminated

### **Lens set**

The color of the pushbuttons can be selected using the color cover set included (5 colors). Item no.: 120344 (see Accessories)

**Adhesive labels**

Devices with adhesive labels have pre-formed recesses. The adhesive labels enclosed (standard size 12.5 x 27 mm) can be affixed in these recesses.