


MGB-L1HEB-PNA-L-156197 (Order no. 156197)

Locking set MGB-L1...-PN (guard locking by spring force) with 4 control elements, push-pull plug, RC12

- ▶ Guard locking with guard lock monitoring
- ▶ Emergency stop according to ISO 13850, illuminated
- ▶ 1 selector switch, 2-stage, illuminated
- ▶ 1 illuminated pushbuttons
- ▶ Operating mode selector
- ▶ including adhesive labels
- ▶ Push-pull plug
- ▶ including terminal plug for enabling switch (RC12, 12-pin)
- ▶ Pre-assembled on mounting plates
- ▶ With escape release
- ▶ Integrated Profinet RT switch
- ▶ Unicode

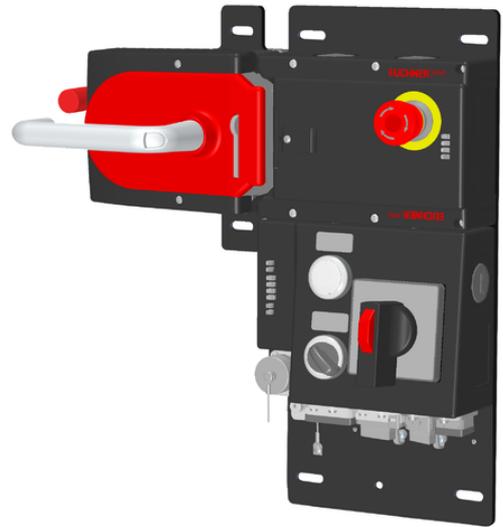

Profinet connection

Connection via push-pull plugs according to IEC 61076-3-117

Profinet RT switch

Point-to-point topology network structure due to integrated RT switch.


Flexible use as interlocking or guard locking

By means of the corresponding evaluation of the safe device data by the control system, use can be as either interlocking or guard locking (with or without monitoring).

Emergency stop illuminated


Emergency stop with illumination that can be controlled as required.

Dimensional drawings

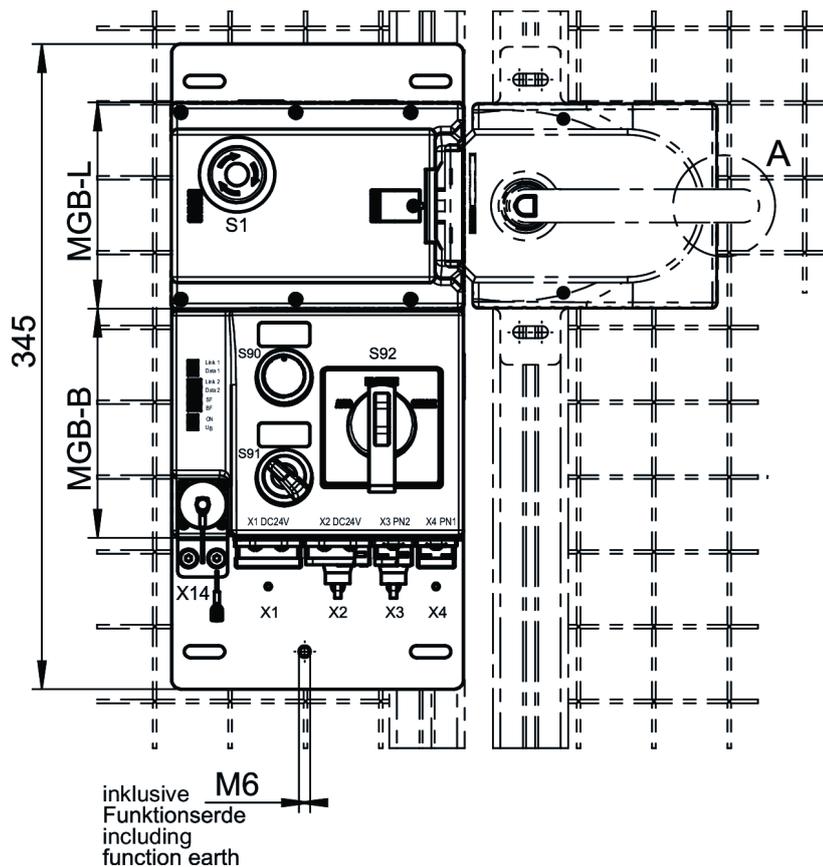

Detail A

Sperrverriegelung im
ausgefahrenen Zustand
Automatic lockoutbar in "open" position.



S92 (BAW)

Betriebsartenwahlschalter
Operating mode selector switch

