

CES-A-BDA-20 (Order no. 084720)



Actuator CES-A-BDA

- ▶ For safety switch CES-A-.5...
- ▶ For CES-AZ safety systems in combination with the read heads CES-A- LNA and CES-A-LMN
- ▶ Round design, \varnothing 20 mm
- ▶ For use in applications in very confined spaces
- ▶ Flush installation is permissible only in plastic



Attention: The actuating range decreases in case of flush installation in metal. Flush installation in aluminum is not permissible.

Dimensional drawings

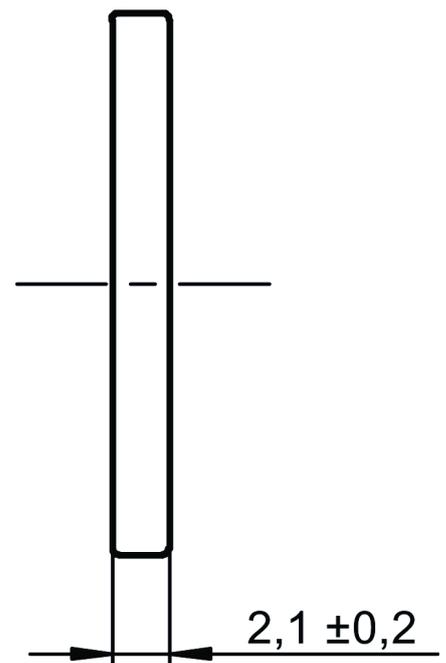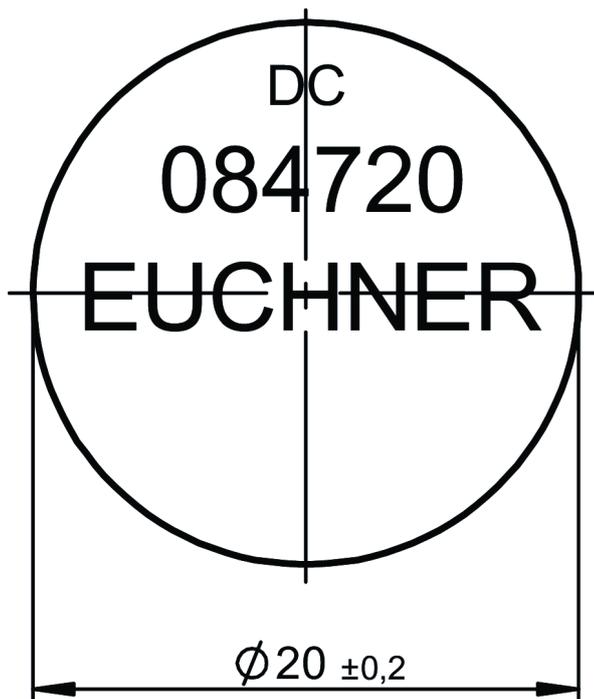

Technical data

Approvals



Electrical connection values

| | |
|--------------|-------------------------|
| Power supply | Inductive via read head |
|--------------|-------------------------|

Mechanical values and environment

| | |
|---------------------|---------------|
| Storage temperature | -25 ... 70 °C |
|---------------------|---------------|

| | |
|---------------|---------|
| Mounting type | bonding |
|---------------|---------|

| | |
|----------------------|------|
| Degree of protection | IP67 |
|----------------------|------|

| | |
|---------------------|---------------|
| Ambient temperature | -25 ... 70 °C |
|---------------------|---------------|

| | |
|----------|--|
| Material | |
|----------|--|

| | |
|---------|--------------|
| Housing | Plastic (PC) |
|---------|--------------|

Downloads

All documentation for this material can be found on our website:

<https://www.euchner.de/en-us/a/084720/?#downloads-tab>