


NX1-2131AL024-M (Order no. 091682)

Safety switch NX, cable entry M20 x 1.5

- ▶ 3x cable entry M20 x 1.5
- ▶ 3 pos. driven contact
- ▶ 1 NO contacts
- ▶ LED indicator



Approach direction

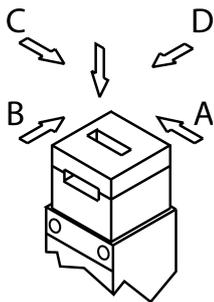

Horizontal and vertical
Can be adjusted in 90° steps

Switching element

2131H Slow-action switching contact 3 positively driven contacts \ominus + 1 NO contact





LED indicator

The switch has two freely assignable LED indicators (red and green).

Accessories required

Actuator is not included.

Functional drawings

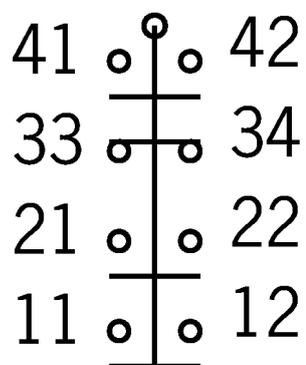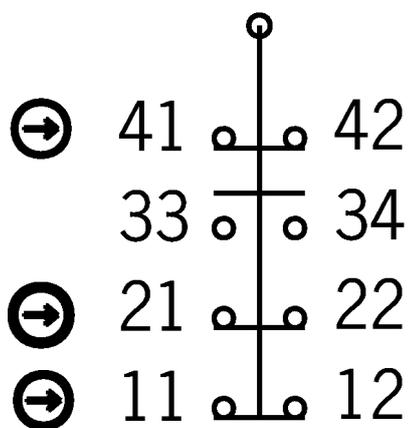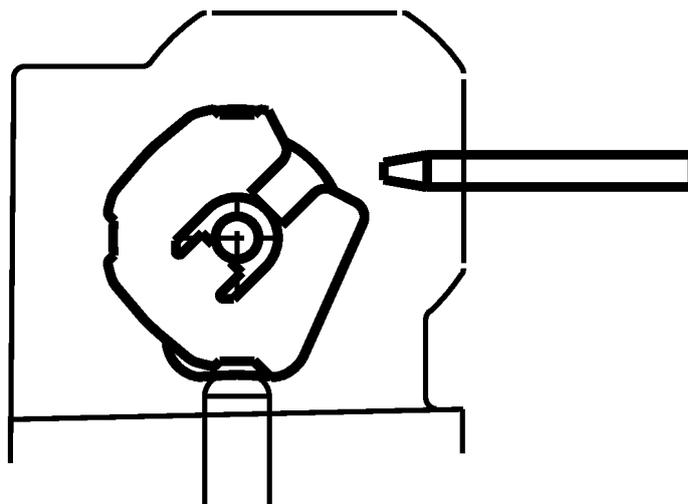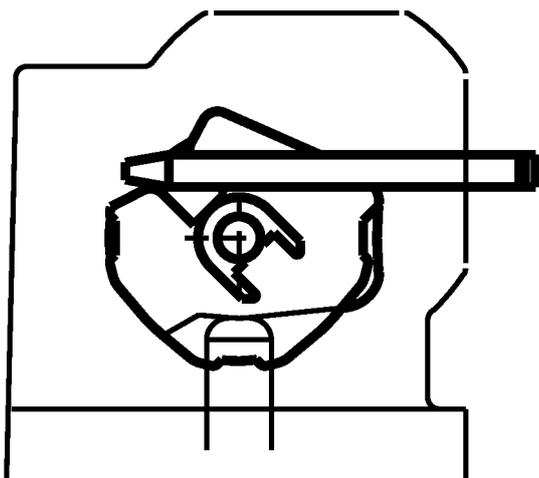

Dimensional drawings

