MGB−L0−ARA−AL2A1−M−R−121058 (Order no. 121058)
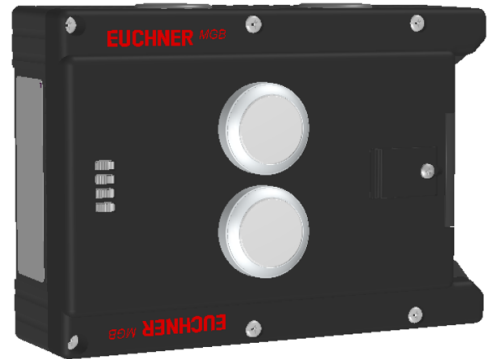
Interlocking module MGB−L0−ARA…, with 2 pushbuttons

▸ Interlocking (without guard locking)
▸ Can be connected in series with other AR devices (e.g. CES−AR and CET−AR)
▸ 2 pushbuttons (illuminated)
▸ With lens set, 6 pcs.
▸ With cable entry
▸ Unicode

Guard locking type

MGB−L0…   The bolt tongue in the handle module is moved into and out of the interlocking module by actuating the door handle. The door arm is not locked in the locked position.

Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

LED indicator

The LED indicator indicates all important system and status information.

Monitoring outputs

OD   ON when the door is closed
OT   Bolt tongue inserted into the evaluation module
OI   Diagnostics; there is a fault

Pushbuttons

S2   1 NO contact, illuminated
S3   1 NO contact, illuminated

Lens set

The color of the pushbuttons can be selected using the color cover set included (5 colors). Item no.: 120344 (see Accessories)