

SN02D12-502-MC1794 (Order no. 089634)

Series SN... 12 mm, mechanical


- ▶ Plunger spacing 12 mm
- ▶ Upright housing, small flange
- ▶ Degree of protection IP67 according to IEC 60529



Switching element

ES 502 E Snap-action switching contact 1 NC + 1 NO

Dimensional drawings

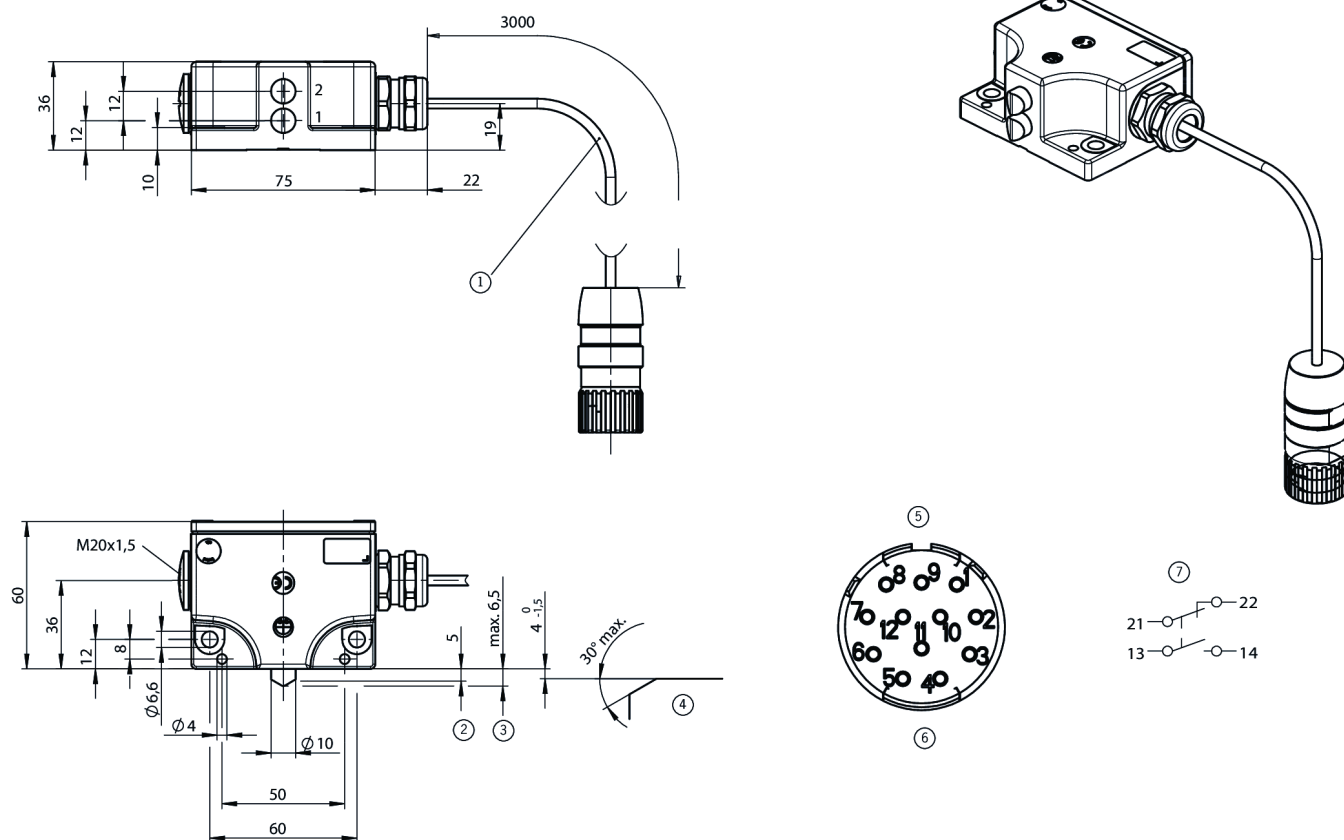

1 Cable 3x0.75, screened, color code DIN 47100

2 Operating point

3 Free position

4 Dog

5 View of connection side

6 Male plug connector, 12-pin, PHONIX CONTACT UC-12P1N1280DU

7 Switching element: ES502E snap-action switching contact with 1 normally open and 1 normally closed contact. Double gap contacts, electrically isolated switching contacts.

8 Housing without earth conductor!

Connection examples

ES 502 E

