

NZ1RS-2121-M (Order no. 087595)

Safety switch NZ.RS, roller plunger, steel roller $\varnothing$ 12 mm, cable entry M20 x 1.5

- ▶ Roller plunger, steel roller $\varnothing$ 12 mm
- ▶ Version C according to EN 50041
- ▶ Cable entry M20 x 1.5
- ▶ 4 pos. driven contact



Approach direction




Horizontal

Can be adjusted in 90° steps

Switching element

2121H Slow-action switching contact 4 positively driven contacts $\rightarrow$

Dimensional drawings

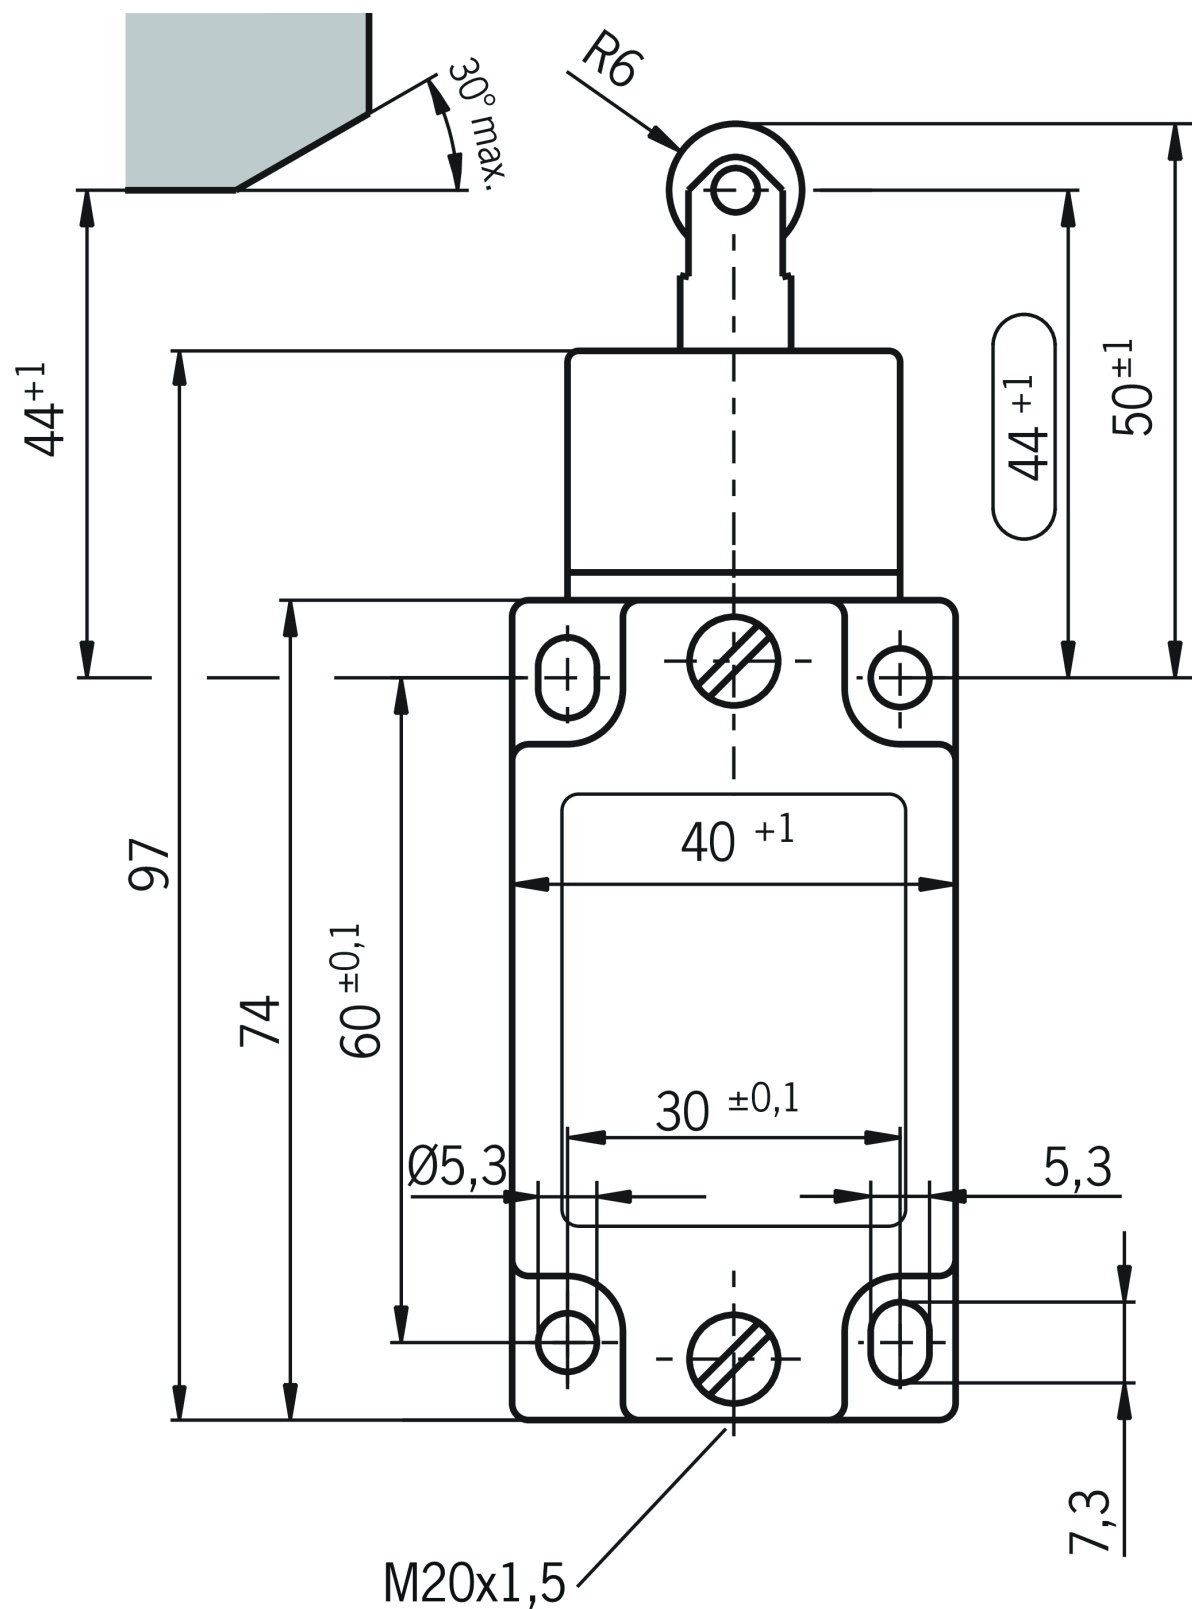

Connection examples

