


NP1-638AS-M (Order no. 083691)

Safety switch NP, mounting according to DIN EN 50047, cable entry M20 x 1.5

- ▶ Mounting according to DIN EN 50047
- ▶ Cable entry M20 x 1.5
- ▶ 2 pos. driven contact



Approach direction



Horizontal and vertical
Can be adjusted in 90° steps


Switching element

638 Slow-action switching contact 2 positively driven contacts \rightarrow

Accessories required

Actuator is not included.

Dimensional drawings

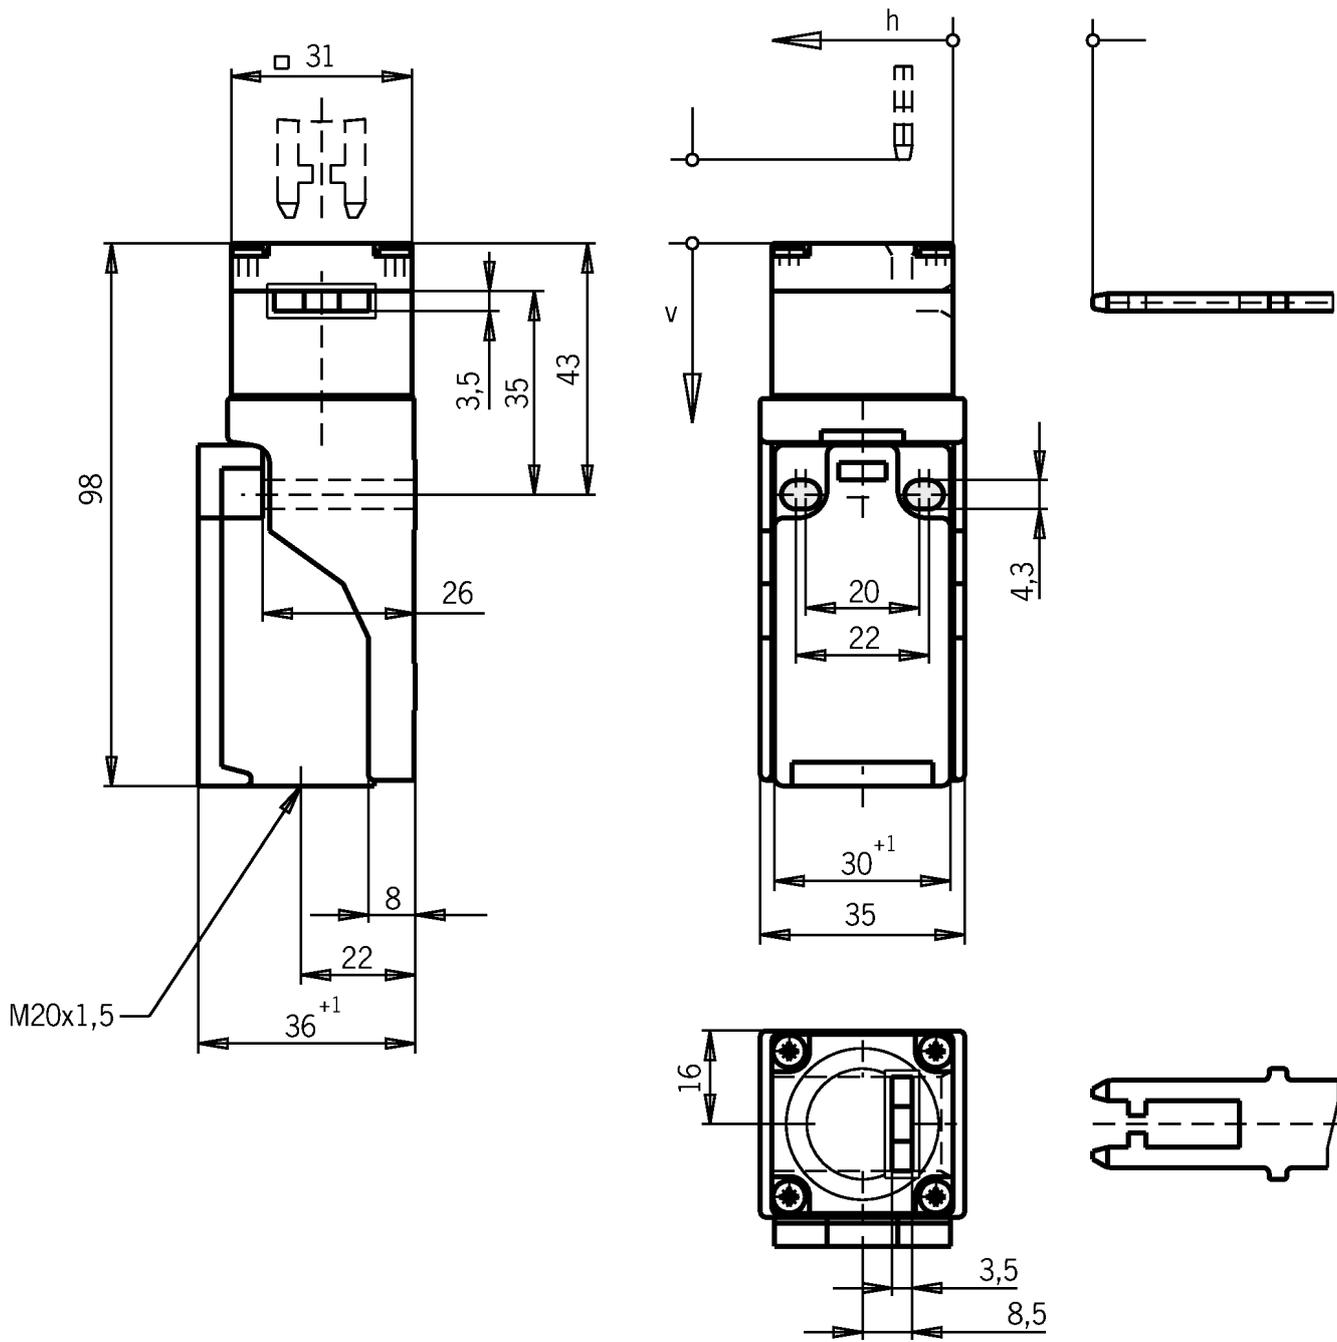

Connection examples

