


## MGB-L1H-APA-R-110458 (Order no. 110458)

### Locking set MGB-L1H-APA... (guard locking by spring force) with 3 pushbuttons, emergency stop, RC18

- ▶ Guard locking with guard lock monitoring
- ▶ Emergency stop according to ISO 13850
- ▶ 2 pushbuttons, illuminated (gn, wh)
- ▶ 1 pushbutton, not illuminated (wh)
- ▶ With plug connector RC18
- ▶ Unicode

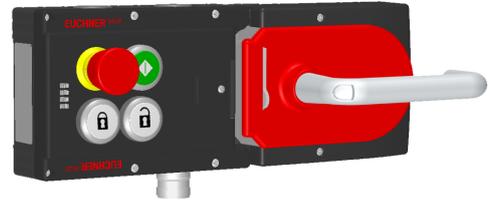

#### Guard locking type

MGB- The locking arm is held in the locked position by spring force and is unlocked by solenoid force  
L1... (closed-circuit current principle, mechanically locked).

#### Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

#### LED indicator

The LED indicator indicates all important system and status information.

#### Monitoring outputs

- OT Bolt tongue inserted into the evaluation module
- OI Diagnostics; there is a fault


#### Emergency stop device

S1 2 positively driven contacts, emergency stop with turn-to-reset, not illuminated


#### Pushbuttons

- S2 1 NO contact, illuminated
- S3 1 NO contact, illuminated
- S4 1 NO contact, not illuminated

Dimensional drawings

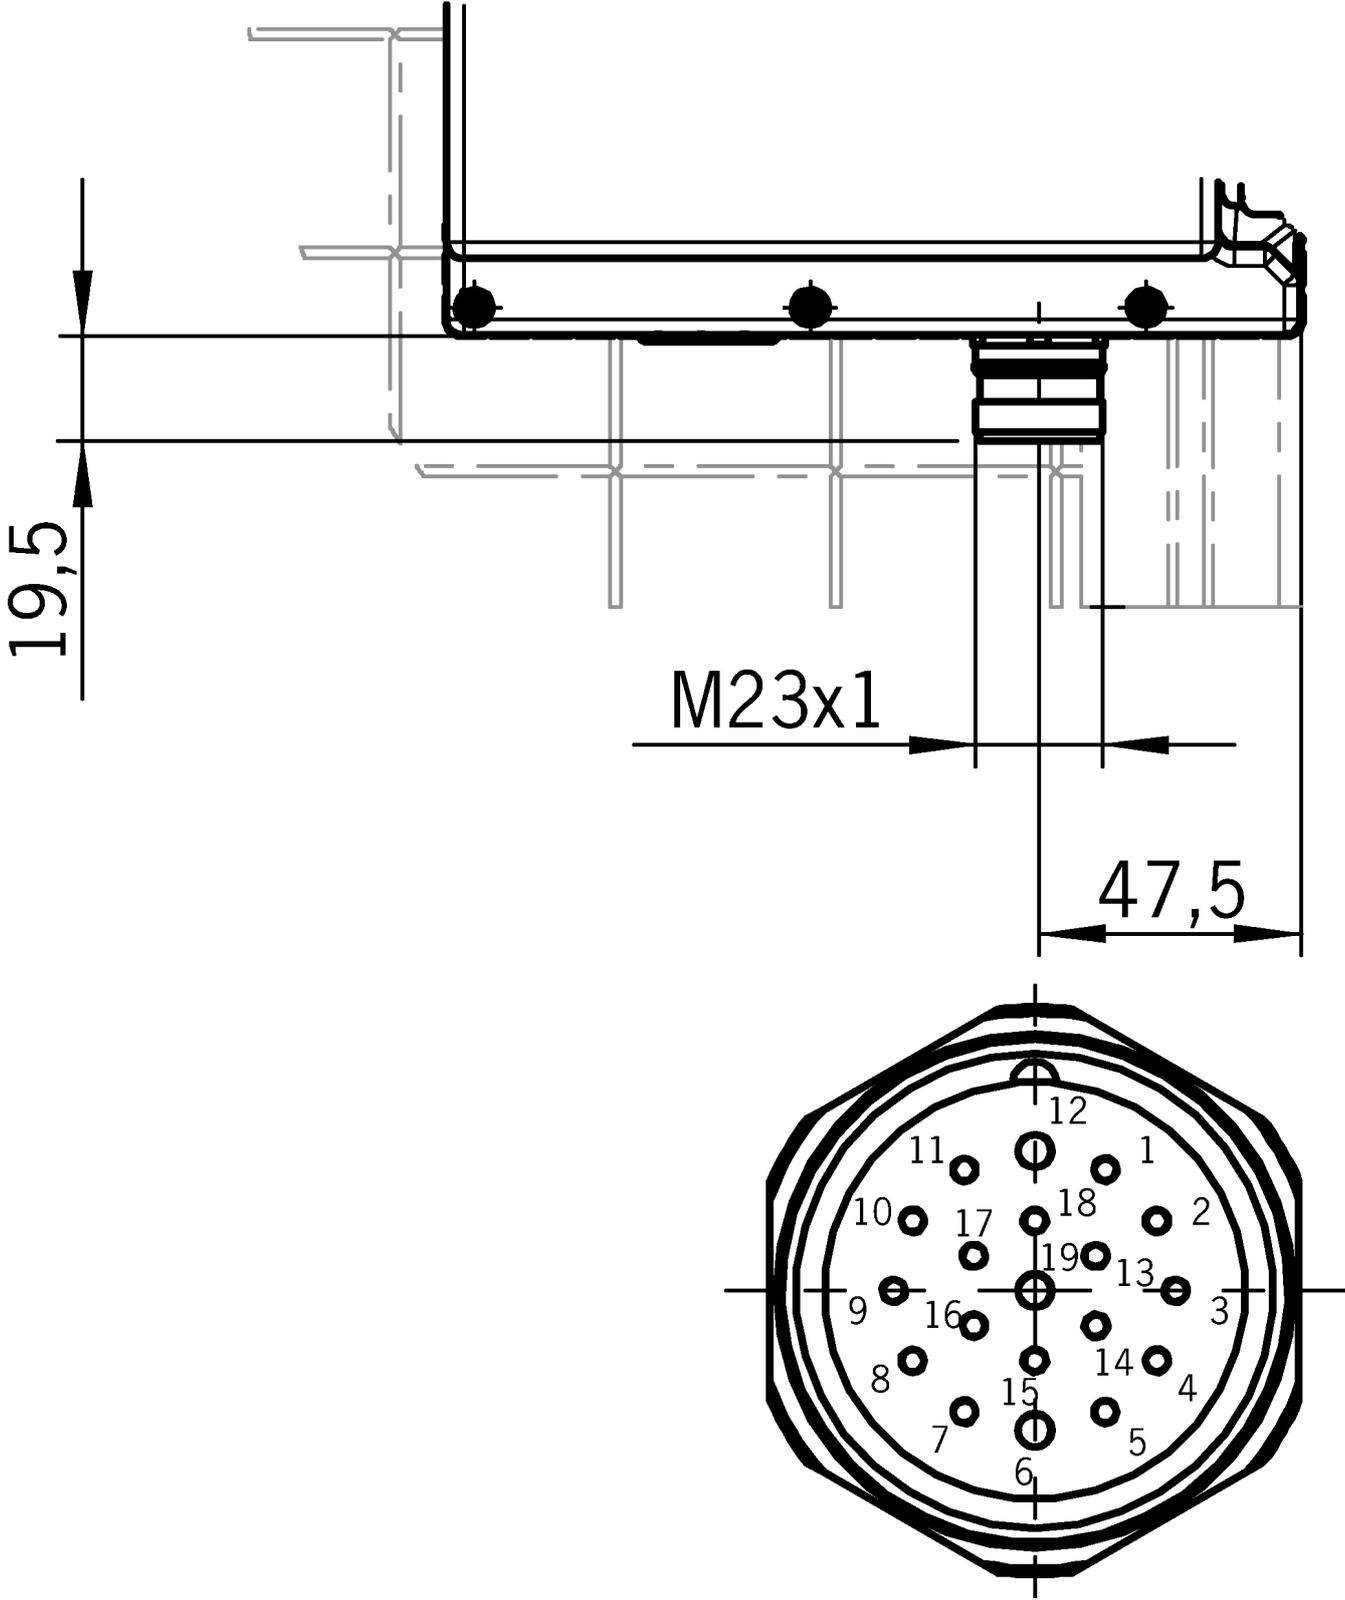

## Dimensional drawings

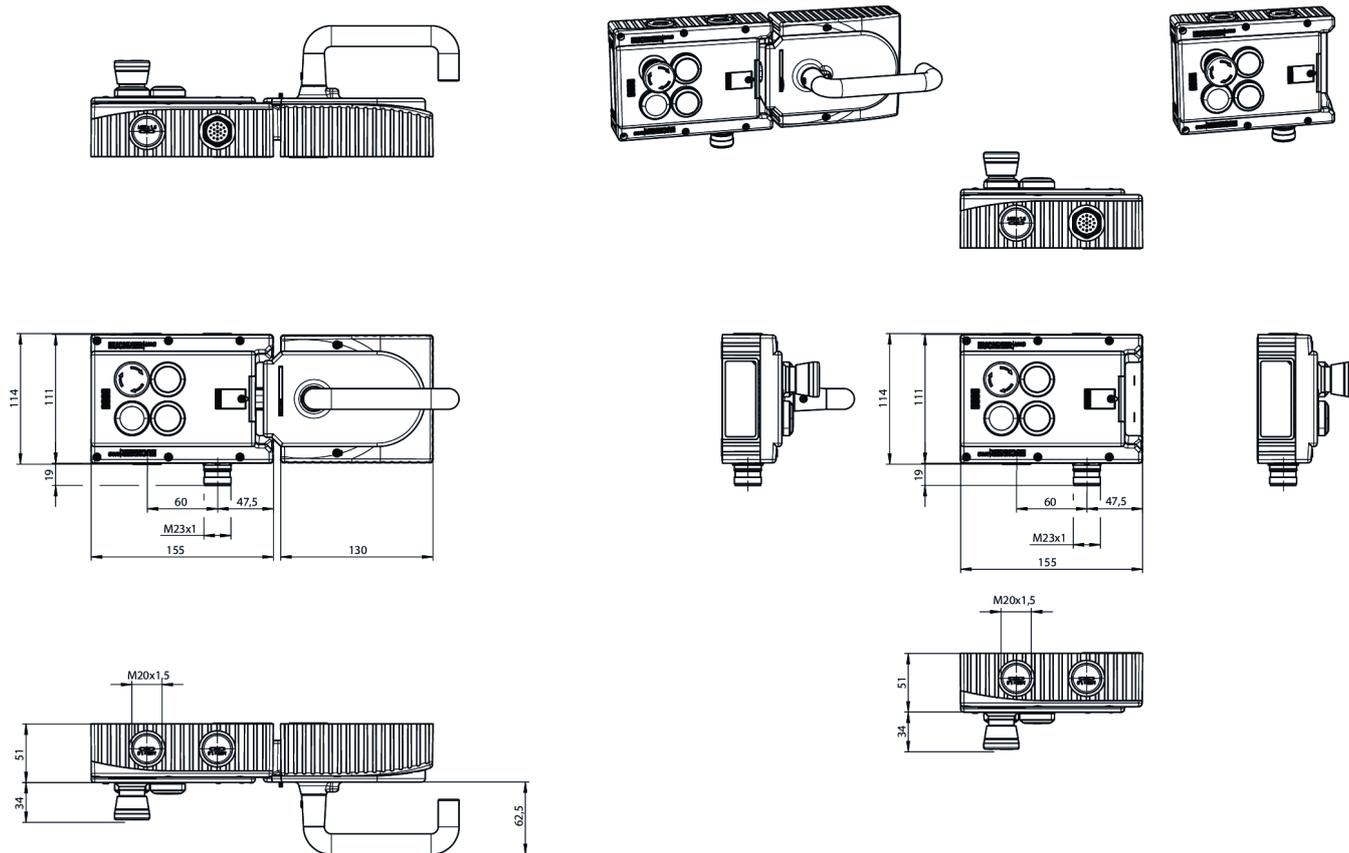

## Connection examples

