


MGB-L2H-ARA-R-111924 (Order no. 111924)

Locking set MGB-L2H-ARA... (guard locking by solenoid force) with 2 indicators, machine stop, RC18

- ▶ Guard locking with guard lock monitoring
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ With machine stop
- ▶ 2 indicators (illuminated, gn, rd)
- ▶ With plug connector RC18
- ▶ Unicode

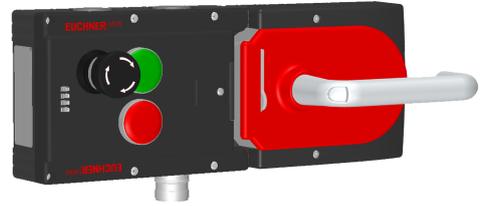

Guard locking type

MGB-L2H-ARA... The locking arm is held in the locked position by solenoid force and is unlocked by spring force when the solenoid is switched off (open-circuit current principle, electrically locked).

Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

LED indicator

The LED indicator indicates all important system and status information.

Monitoring outputs

- OD ON when the door is closed
- OT Bolt tongue inserted into the evaluation module
- OL Guard locking solenoid in locked position
- OI Diagnostics; there is a fault

Emergency stop device

S1 2 positively driven contacts, emergency stop with turn-to-reset, not illuminated









Machine stop

S1 Version as emergency stop but in black/silver, e.g. as machine stop. Important: Do not use as emergency stop.

Indicators

- H2 LED, green
- H3 LED, red

Dimensional drawings

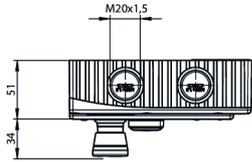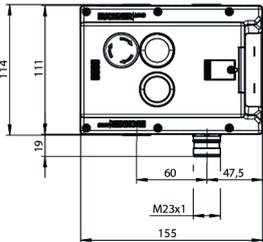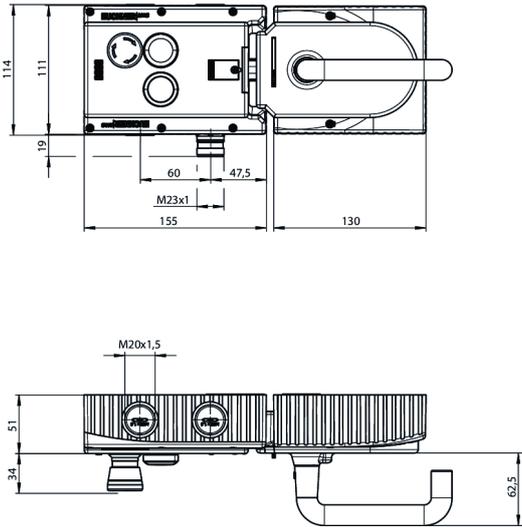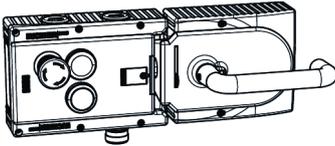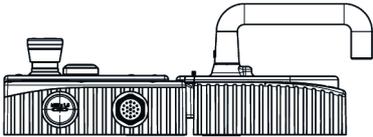

Dimensional drawings

